


AD8020(T) SERIES



External Dimensions

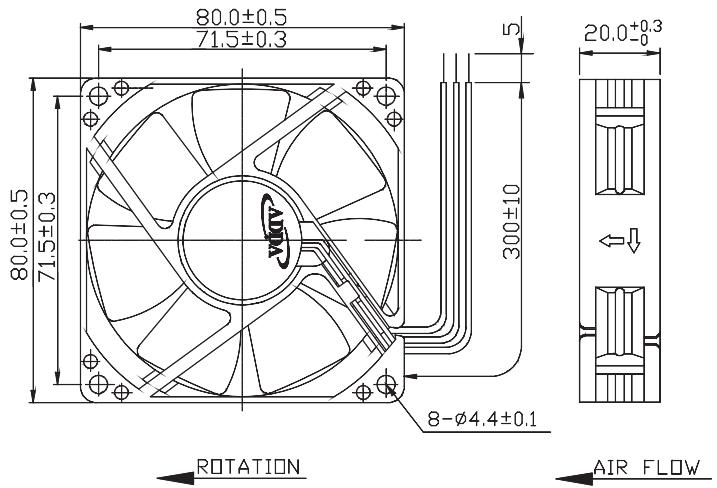

Frame:Plastic(UL:94V-0)
Impeller:Plastic(UL:94V-0)
Lead wire:UL1007AWG24

Specifications(Nominal)


*:Noise is measured at the distance of one (1)meter from the axis of intake.

Bearing type: ○=Ball ■=Sleeve ●=Hypro bearing

Frame size (mm)	Model No.	Bearing	Rated		Rated Power (W)	Speed (rpm)	Maximum AirFlow (CMM)		Maximum Pressure (InAq)		*Noise Level (dB/A)	Weight (g)
		System Type	Voltage (VDC)	Current (A)			(CFM)	(mmAq)				
80x80x20	AD0812LB-C76(T)	○	●	12	0.06	0.72	2100	0.533	18.863	0.074	1.879	23.8
	AD0812MB-C76(T)	○	●	12	0.08	0.96	2500	0.660	23.345	0.091	2.311	27.4
	AD0812HB-C76(T)	○	●	12	0.13	1.56	3100	0.808	28.572	0.149	3.784	34.9
	AD0812UB-C76(T)	○	●	12	0.18	2.16	3750	0.995	35.168	0.218	5.537	40.1
	AD0824MB-C76(T)	○	●	24	0.04	0.96	2500	0.660	23.345	0.091	2.311	27.4
	AD0824HB-C76(T)	○	●	24	0.06	1.44	3100	0.808	28.572	0.149	3.784	34.9

Specifications subject to change without notice.

The specification for bearing type is for reference only, for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主, 若需其他產品資訊請聯絡您在ADDA的業務代表, 謝謝!!)

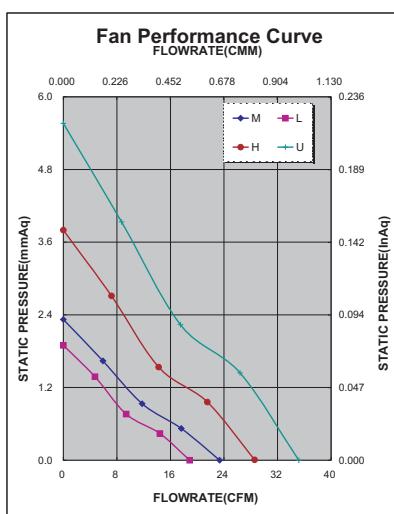

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓						✓				

*Safety approvals

✓	✓	✓	✓	✓

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADDA:](#)

[AD0812MB-C70LF](#) [AD0812UB-C70\(T\)](#) [AD0812LB-C70\(T\)](#) [AD0812MB-C70\(T\)](#) [AD0812HB-C70\(T\)](#)