
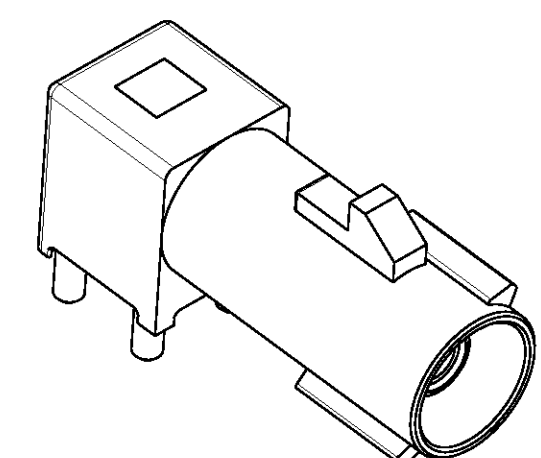


LOC		DIST		REVISIONS						
IN		00		F	LTR	DESCRIPTION	DATE	DWN	APV	
					E	REVISED PER ECR-07-006019	25APR2007	AH	LV	
					E1	REVISED PER ECO-10-013661	30JUN2010	OLD	LV	
					E2	ECR-10-025939	17OEC2010	KP	LV	

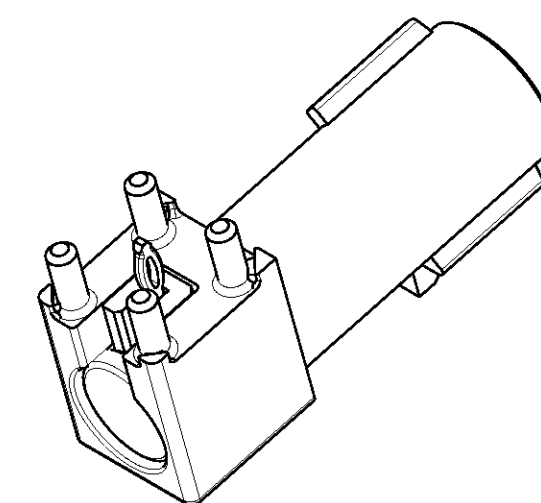


△ MATERIAL:
JACK & END CAP: ZINC
PIN: BRASS
DIELECTRIC: PCT

△ 2 DATUMS AND DIMENSION ESTABLISHED BY CUSTOMER RELATIVE TO LOCATION ON PCB.

3. JACK INTERFACE PER SAE/USCAR-18, FAKRA SMB RF CONNECTOR SUPPLEMENT)

4 FINISH:
JACK: 2.0µm MIN THICK TIN OVER 1.52µm MIN NICKEL OVER COPPER FLASH
PIN: 0.76µm MIN GOLD IN ZONE I, 2.5µm MIN TIN IN ZONE II
ALL OVER 2.0µm MIN NICKEL
END CAP: 2.54µm MINIMUM BRIGHT TIN OVER MATTE COPPER FLASH

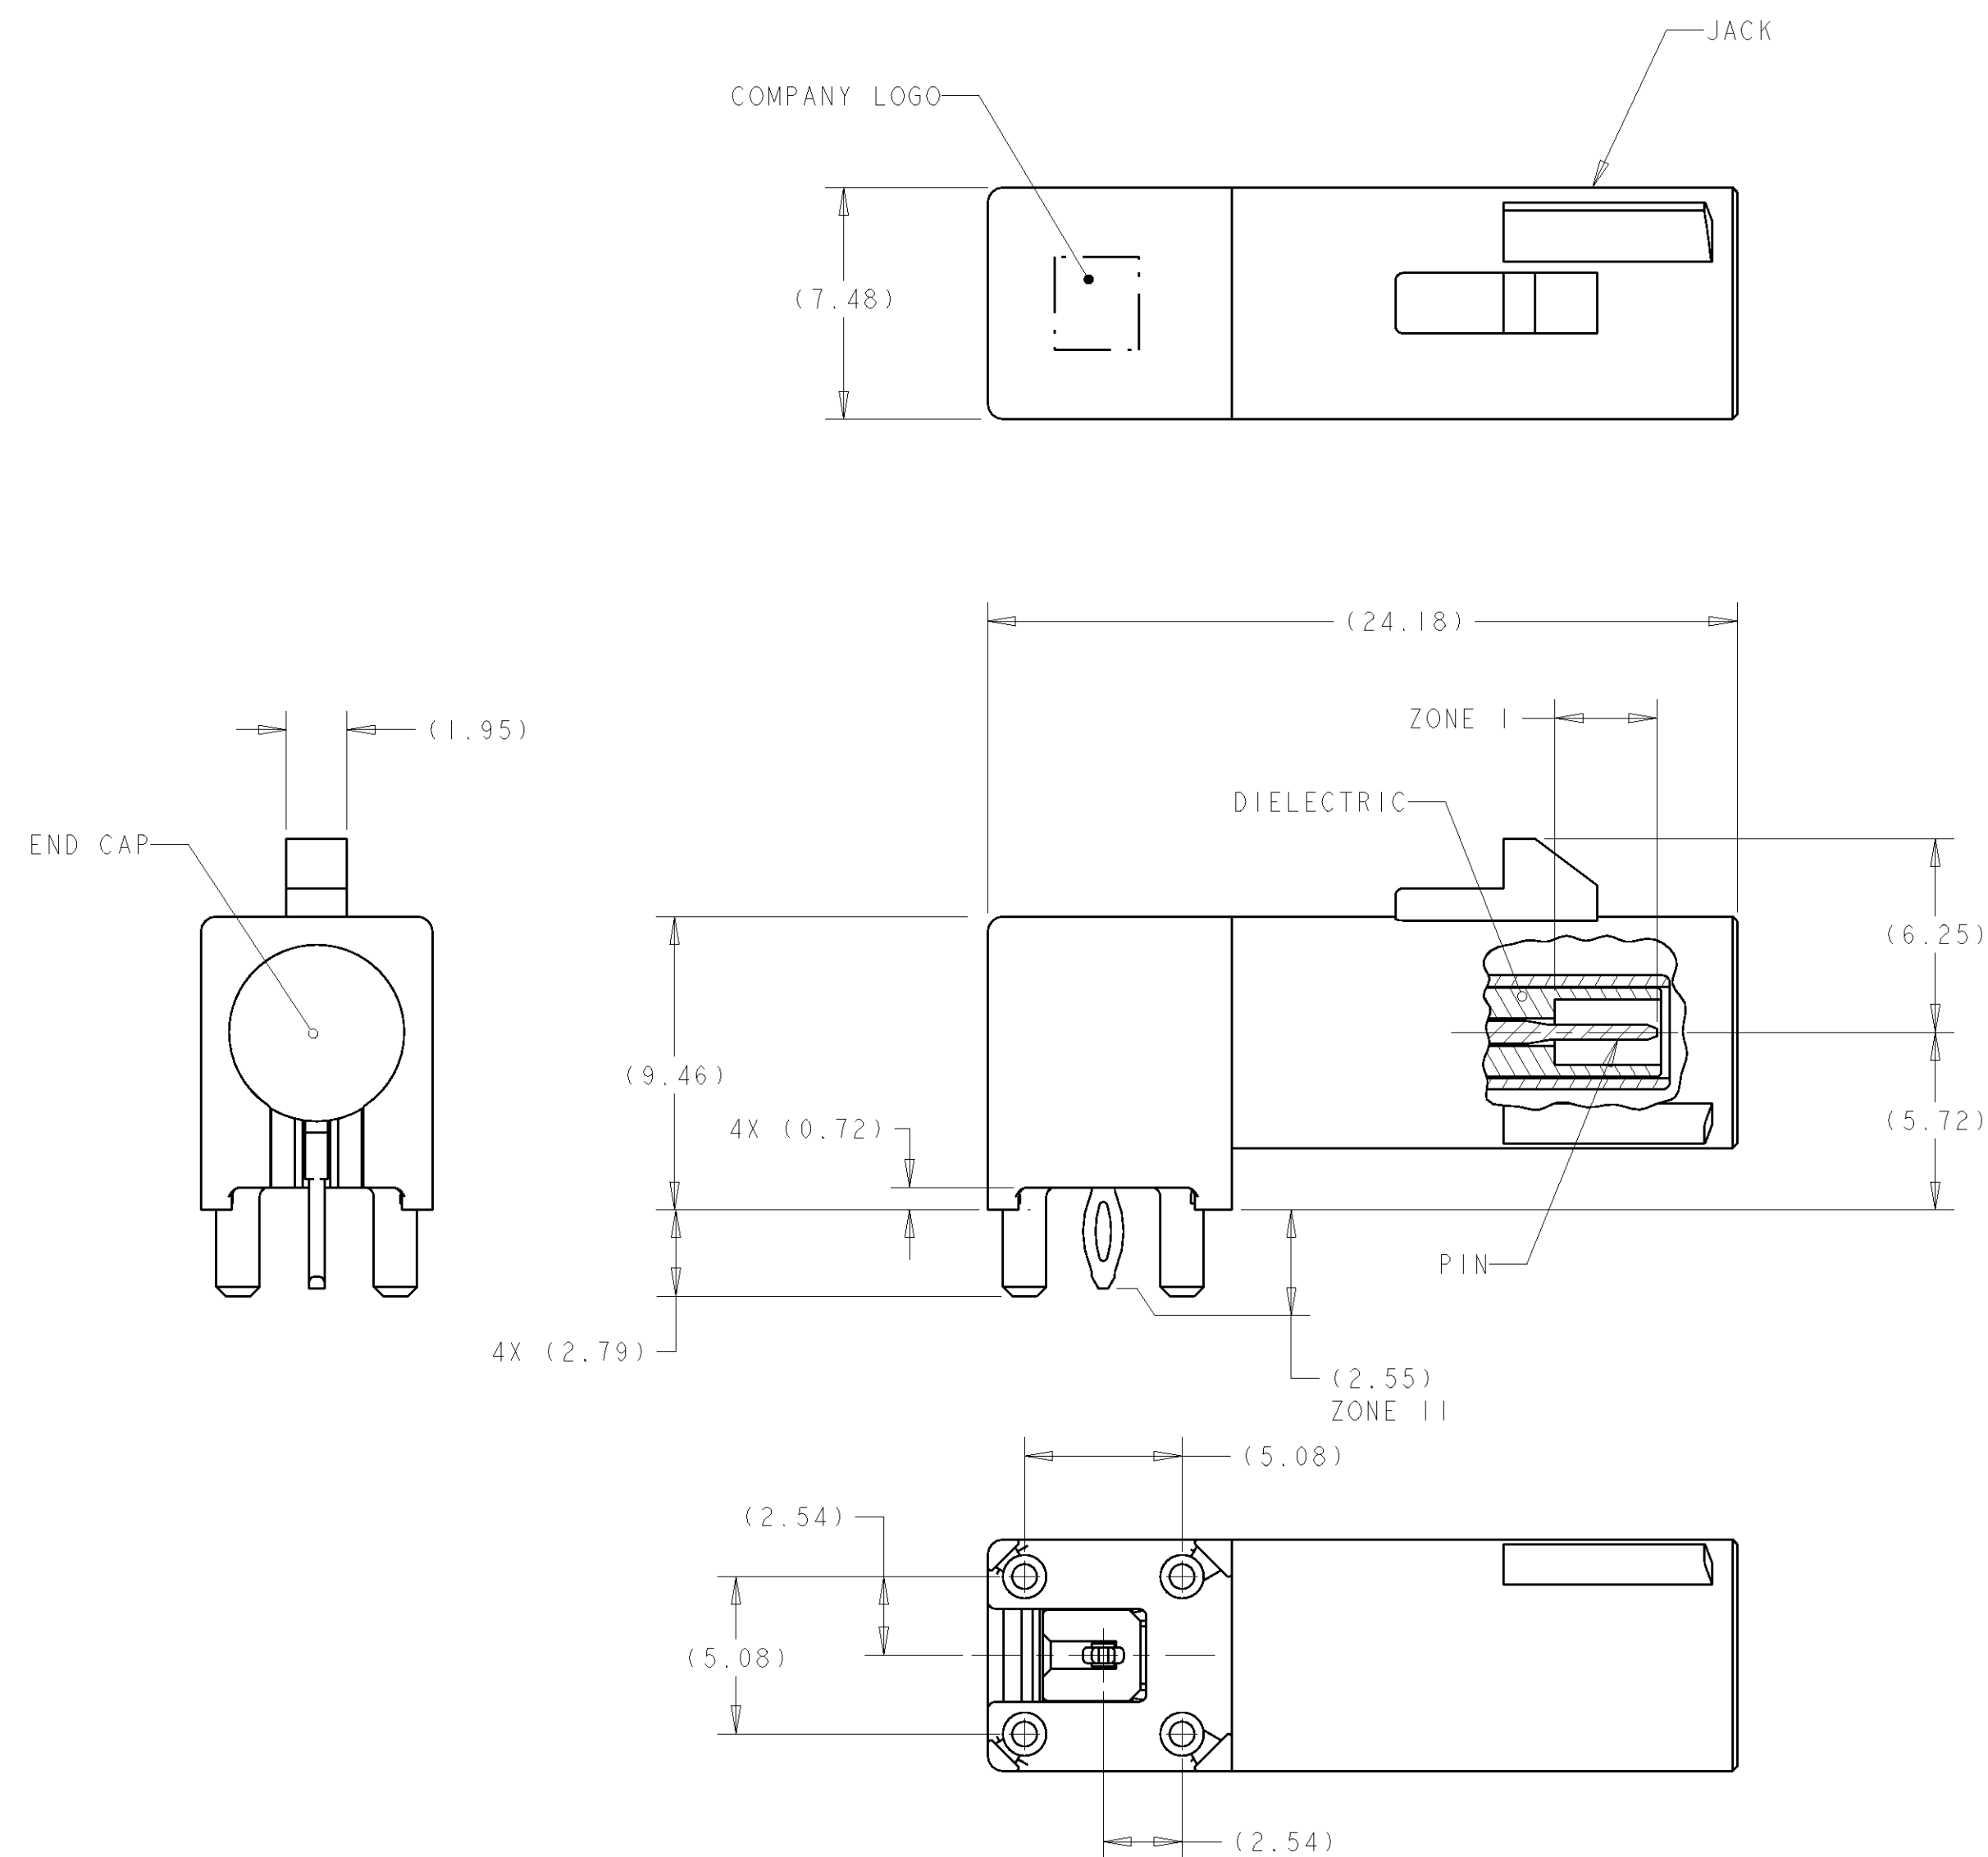

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-776865-0](#)