


1 WIRE INSULATION: 12.70[.500] — 13.97[.550] DIA

2 THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.

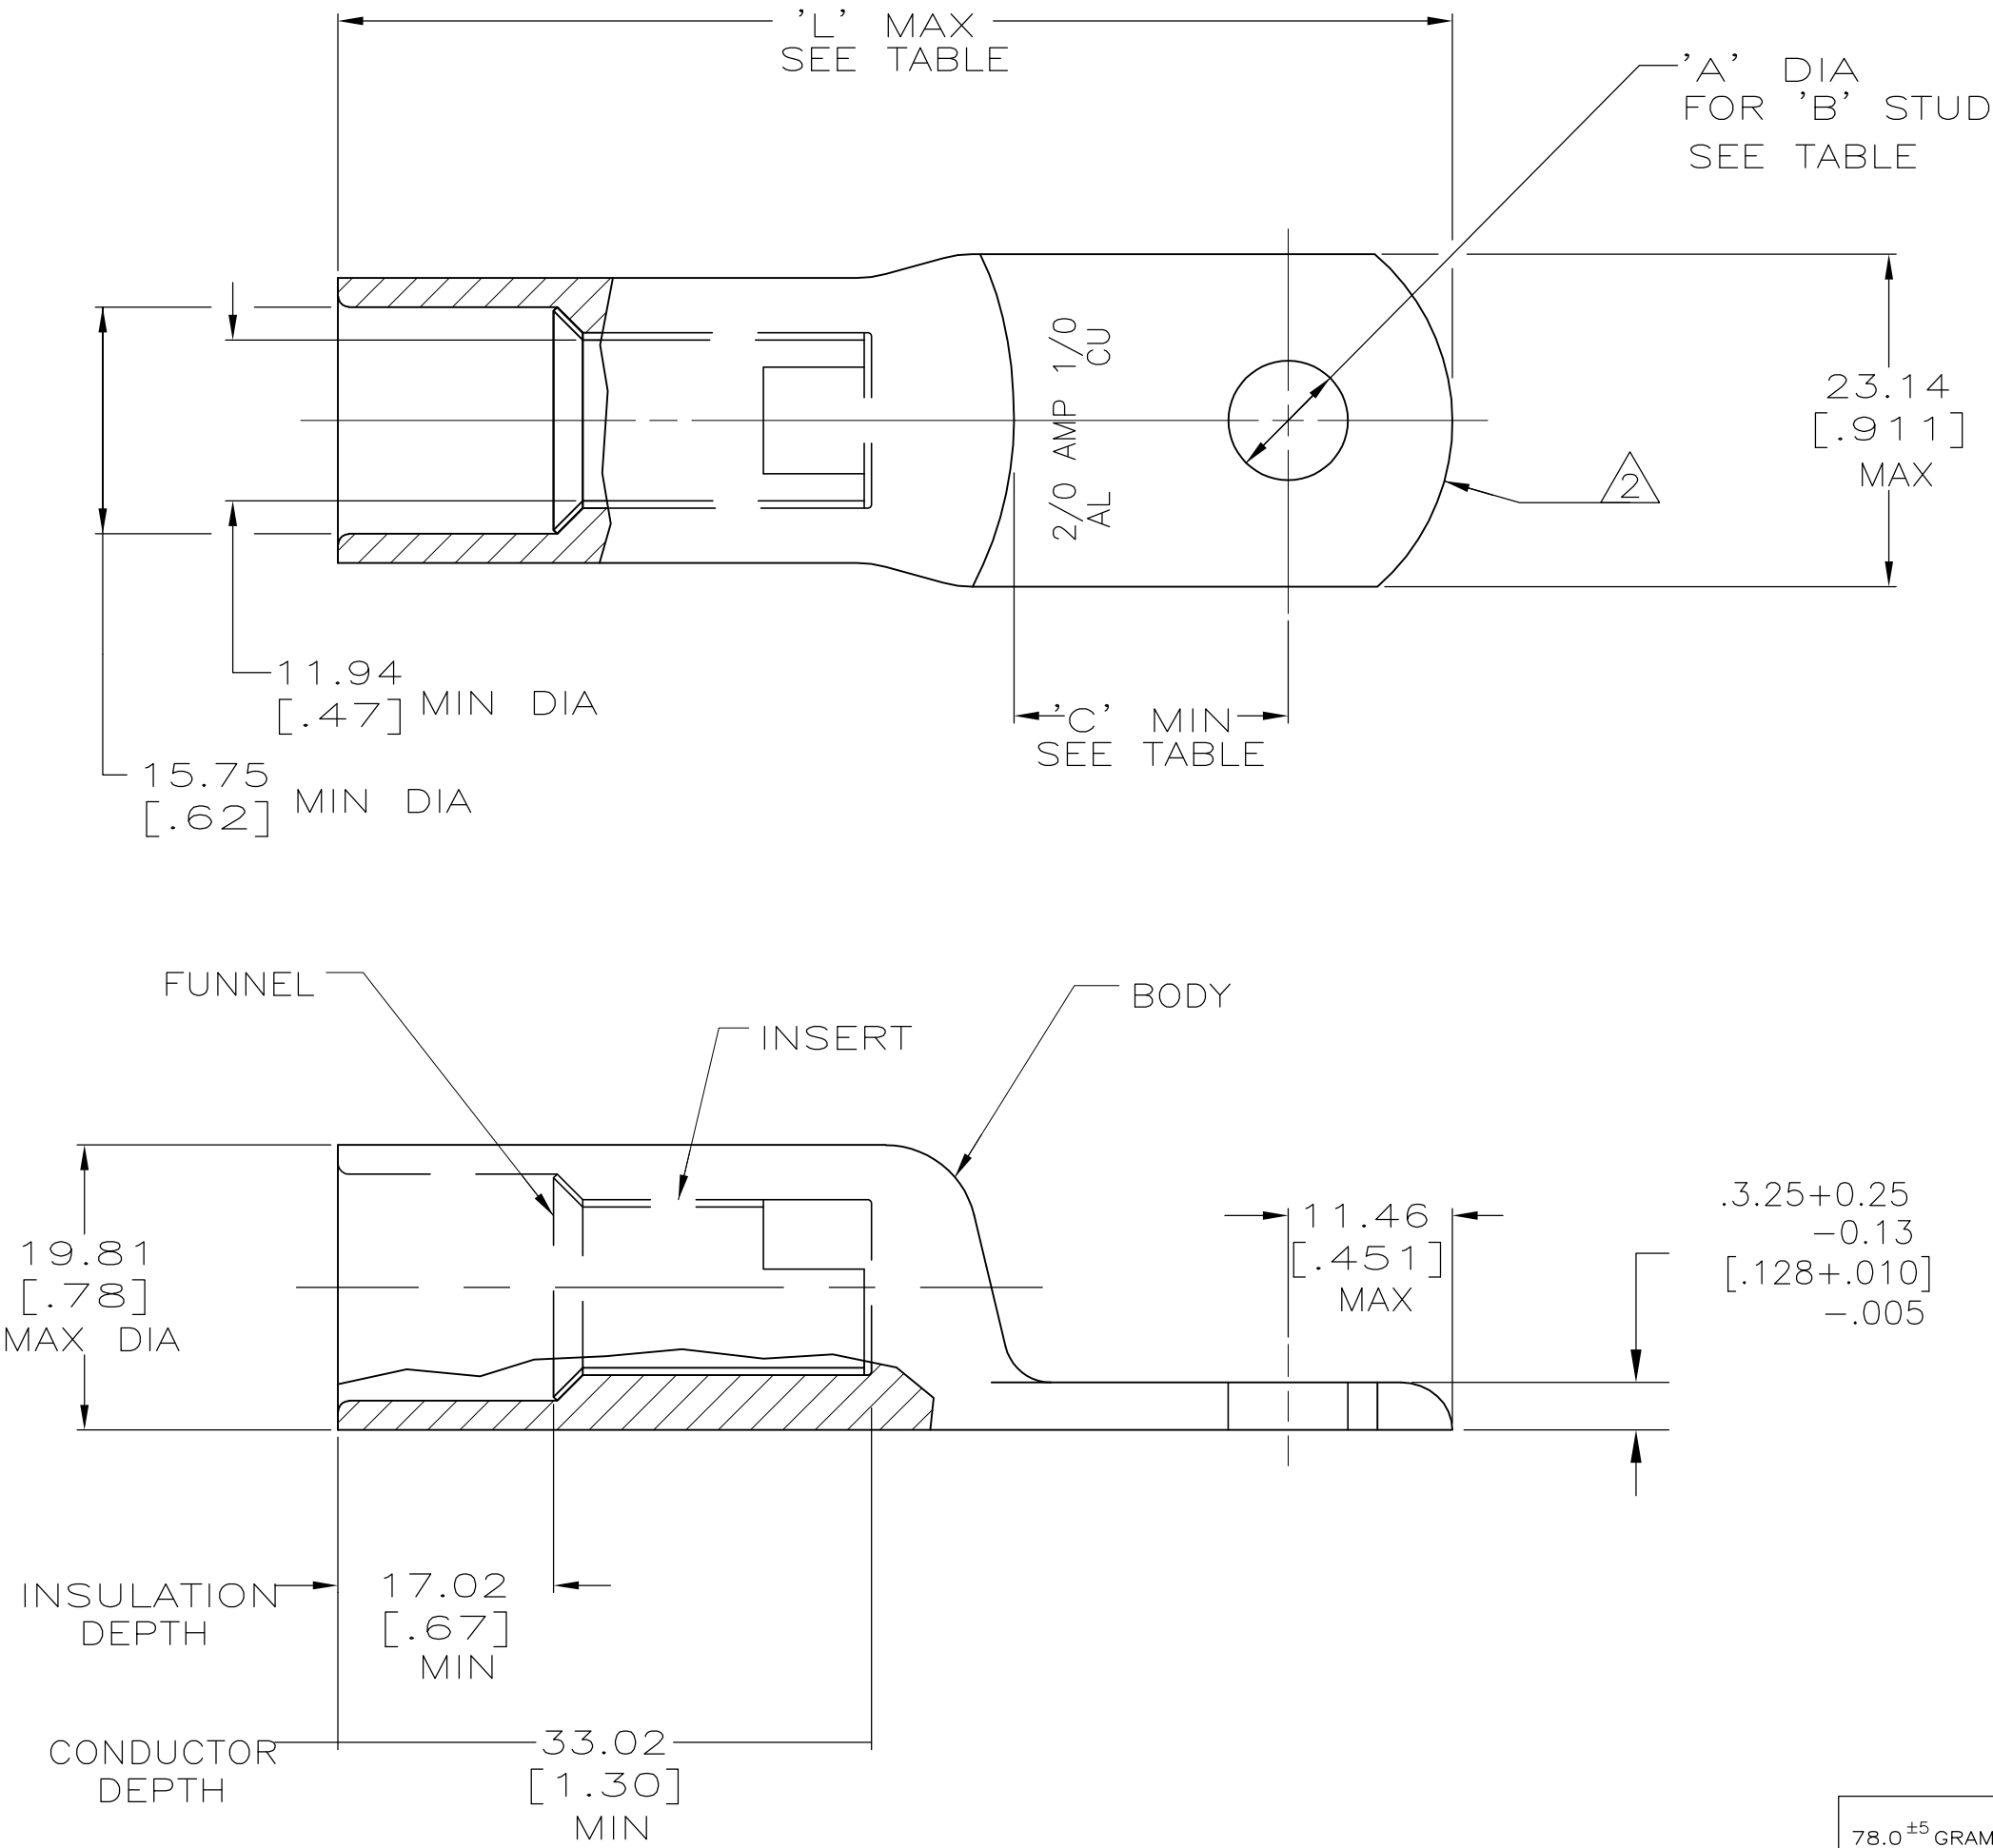

78.0 ^{±5} GRAMS	13.08 ^{±0.13} [.515 ^{±.005}]	1/2	77.47 [3.05]	18.03 [.71]	BODY: COPPER ASTM-B187 ANNEALED TIN PL PER MIL-T-10727 0.00381[.000150] MIN THK INSERT & FUNNEL: BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	277152-5
81 ^{±5} GRAMS	9.91 ^{±0.13} [.390 ^{±.005}]	3/8				277152-4
80 ^{±5} GRAMS	8.33 ^{±0.13} [.328 ^{±.005}]	5/16	71.37 [2.81]	11.94 [.47]		277152-3
76.3 ^{±5} GRAMS	9.91 ^{±0.13} [.390 ^{±.005}]	3/8				277152-2
-	6.73 ^{±0.13} [.265 ^{±.005}]	1/4				277152-1
WEIGHT	'A'	'B'	'L'	'C'	MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 6/23/89 DK SCHRUM	TE Connectivity			
DIMENSIONS: MM [INCHES]		CHK 10/16/90 MS FEHER				
		APVD 10/20/90 AJ KAUFMAN	NAME WIRE TERMINAL, RING TONGUE, SEALED COPALUM 71.3mm2 [2/0] ALUMINUM 53.9mm2 [1/0] COPPER			
		PRODUCT SPEC 108-11011				
MATERIAL SEE TABLE		APPLICATION SPEC 114-2134	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		FINISH SEE TABLE	WEIGHT SEE TABLE	A2	00779	C=277152
CUSTOMER DRAWING			SCALE	2:1	SHEET	1 of 1
					REV	L

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[277152-1](#)