


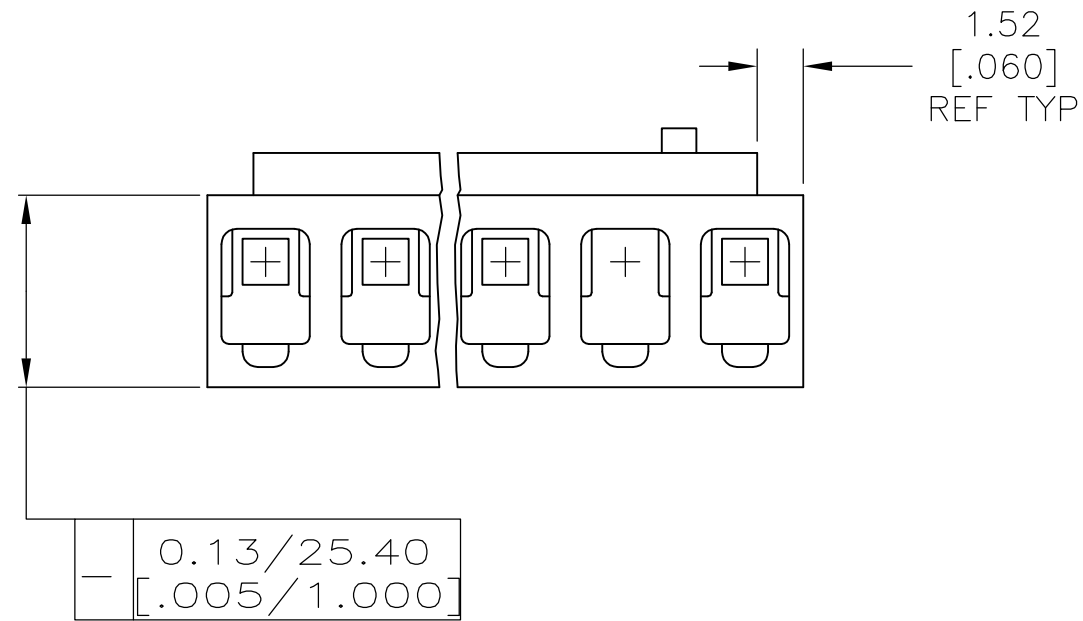
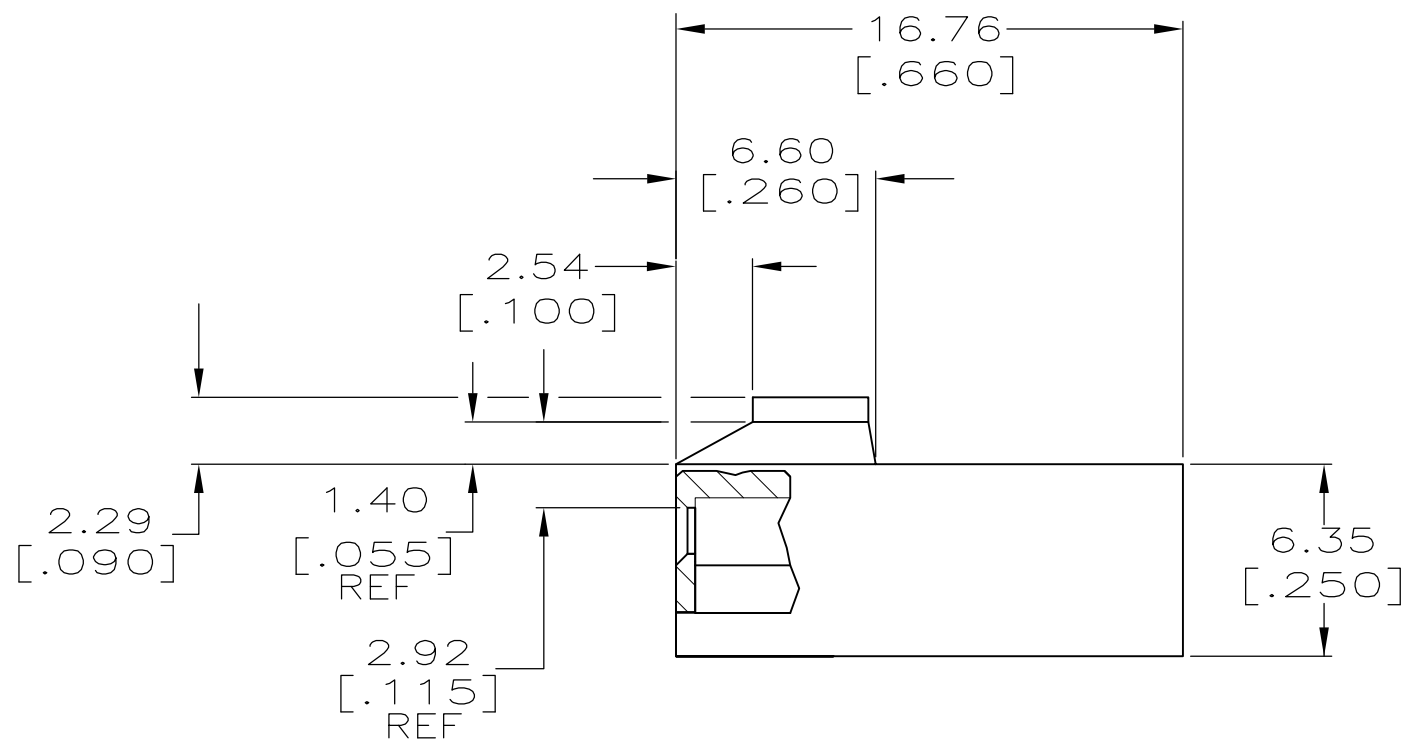
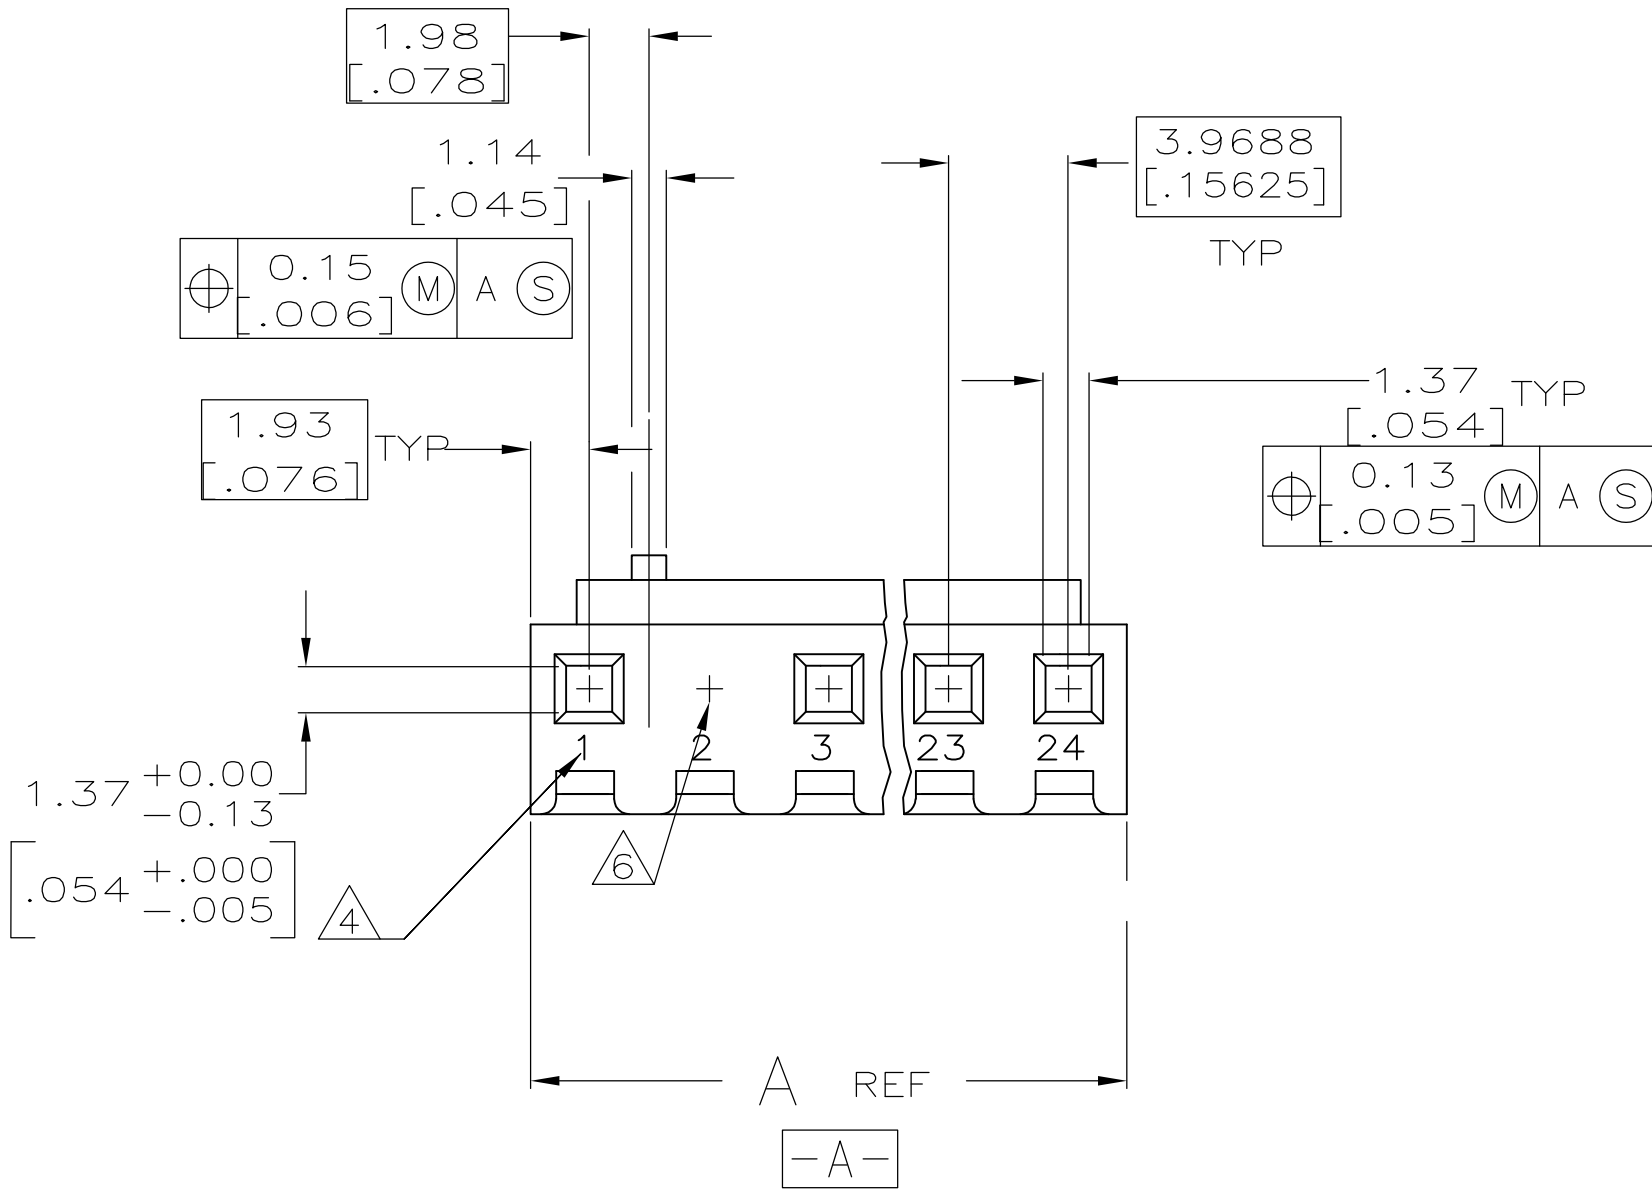


LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	OWN
CM	54	A		REVISED PER ECO-12-007810	30JUL12	KH



- 1 UNIT ACCEPTS 1.14[.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4  CIRCUIT ID NUMBERS.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6  CIRCUIT 2 IS MOLDED CLOSED,USING EITHER OPTION A OR OPTION B.

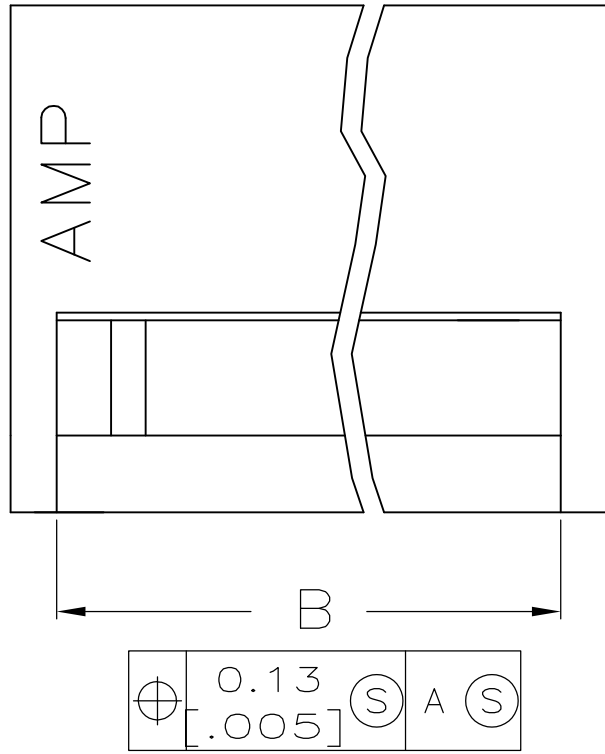


OPTION A



OPTION B

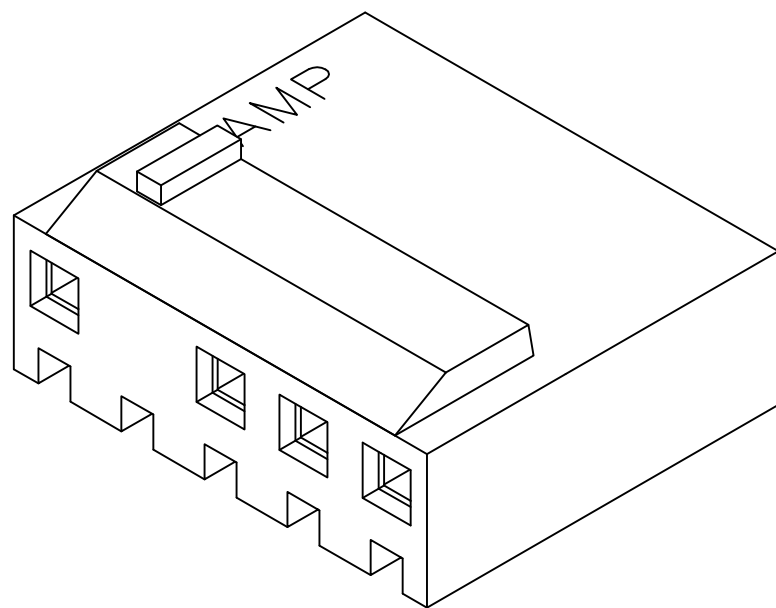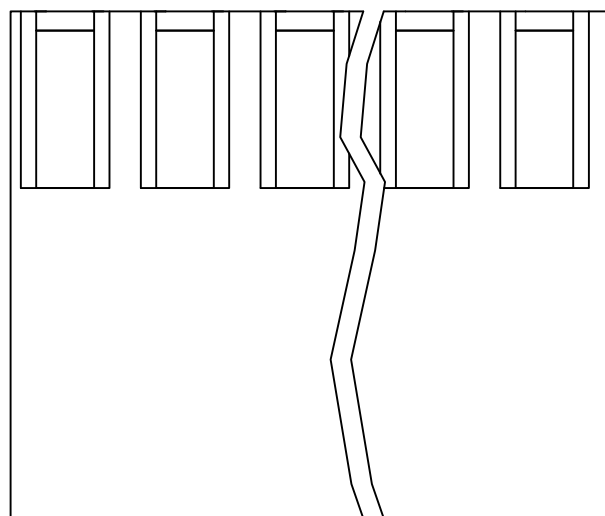

3-DIMENSIONAL MODEL
NTS



12.70 [.500]		15.77 [.621]	4	647171-4
B		A	NO. OF CIRCUITS	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS CHK R. SWING APVD B. GENTRY	11-20-97	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME
0 PLC ± -		1 PLC ± -		PRODUCT SPEC
2 PLC ± -		3 PLC ± 0.13 [.005]		APPLICATION SPEC
4 PLC ± -		ANGLES ± -		WEIGHT
MATERIAL NYLON,UL 94V-0 NATURAL		FINISH -		RESTRICTED TO
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1 REV A



HOUSING WITH .260
LOCKING RAMP AND A TAB.
NO.2 CIRCUIT CLOSED, SL-156

A100779C647171

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[647171-4](#)