

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .

ALL RIGHTS RESERVED.

(C) COPYRIGHT - By -



LOC

G

DIST

14

			REVISIONS		
P	LTR		DESCRIPTION	DATE	DWN APVD
	H3		REVISED PER ECO-14-019230	02APR2015	NK DR

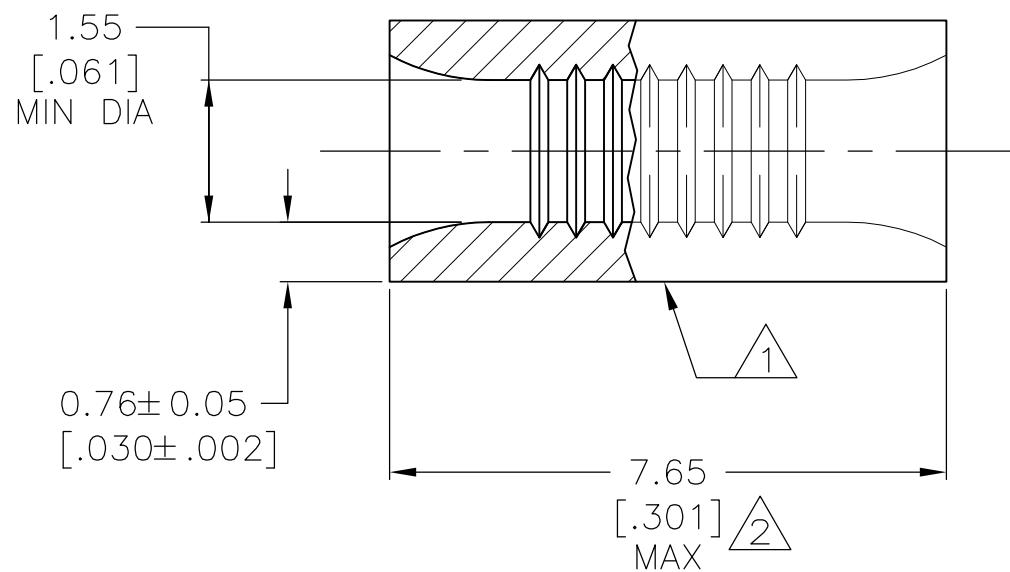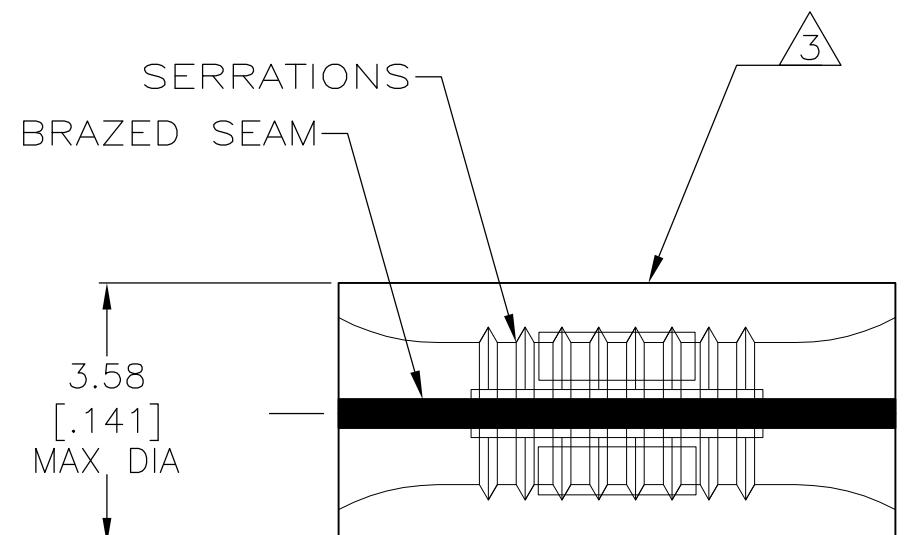

AMP WIRE RANGE	E13288 Listed
22-16 AWG SOLID OR STRANDED	NOT APPLICABLE
LR7189 Certified	MILITARY P/N AND CLASS
NOT APPLICABLE	NOT APPLICABLE

1

STAMP AMP 22-18 APPROX AS SHOWN 22-16 SPLICES
ARE STAMPED WITH 22-18 IN ACCORDANCE WITH MILITARY
SPEC MIL-T-7928 COMMERCIAL WIRE RANGE IS 22-16.

2

MAXIMUM LENGTH DOES NOT INCLUDE MANUFACTURING TABS.

3

WIRE BARREL COLOR CODED ORANGE TO DENOTE NICKEL MATERIAL.

REQD	322326
3 COLOR CODING	PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT
INFORMATION OR COPIES
OF DRAWINGS AND
TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752

RECOMMENDED OPERATING TEMPERATURE:

649° C MAX

VOLTAGE RATING:

NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
0.26-1.65mm² [509-3,250] CIR MILS
SOLID OR STRANDED

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN DK SCHRUM 14NOV96	NAME TE Connectivity
CHK MJ SPICER 19NOV96	
APVD JL MECKLEY 19NOV96	
PRODUCT SPEC —	
APPLICATION SPEC —	
SIZE A3	CAGE CODE 00779
DRAWING NO C-322326	RESTRICTED TO —
WEIGHT —	
CUSTOMER DRAWING	
SCALE 10:1	Sheet 1 of 1
	REV H3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[322326](#)