

Ø172×150×51 mm

San Ace 172 9E type   

Sidecut type



General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 529.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black or Blue (Sensor) Yellow
- Mass 760 g

Specifications

The models listed below **have pulse sensors**.


Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m³/min] [CFM]		Max. static pressure [Pa] [inchH ₂ O]		SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
109E5712K501	12	10.2 to 13.8	2.9	34.8	4100	8.5	300	243.0	0.976	60	-20 to +60	40000/60°C
109E5712Y501			2.3	27.6	3800	8	282	210	0.84	60		
109E5712H501			1.2	14.4	3050	6.4	226	137.2	0.551	52	-20 to +70	
109E5712F501			0.68	8.16	2500	5.1	180	95	0.38	47		
109E5712M501			0.48	5.76	2000	4.2	148	67.6	0.271	41		
109E5724C501	24	20.4 to 27.6	2.3	55.2	4800	9.9	350	308.0	1.237	66	-20 to +70	
109E5724K501			1.3	31.2	4100	8.5	300	243.0	0.976	60		
109E5724H501			0.58	13.92	3050	6.4	226	137.2	0.551	52		
109E5724F501			0.35	8.4	2500	5.1	180	95	0.38	47		
109E5724M501			0.2	4.8	2000	4.2	148	67.6	0.271	41		
109E5748C501	48	40.8 to 55.2	1.2	57.6	4800	9.9	350	308.0	1.237	66	-20 to +60	
109E5748K501			0.7	33.6	4100	8.5	300	243.0	0.976	60		
109E5748H501			0.28	13.44	3050	6.4	226	137.2	0.551	52	-20 to +70	
109E5748F501			0.19	9.12	2500	5.1	180	95	0.38	47		
109E5748M501			0.11	5.28	2000	4.2	148	67.6	0.271	41		

Other sensor specifications are available as options. Refer to the index (p. 543).

Airflow - Static Pressure Characteristics


109E5712K501 With pulse sensor

Operating voltage range

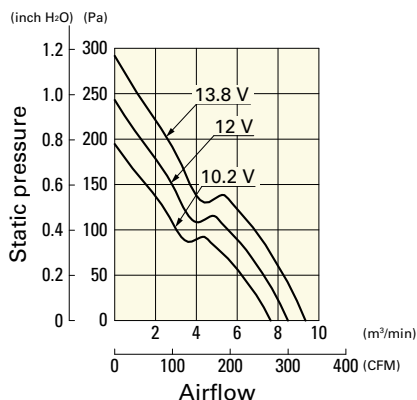


109E5712Y501 With pulse sensor

Operating voltage range

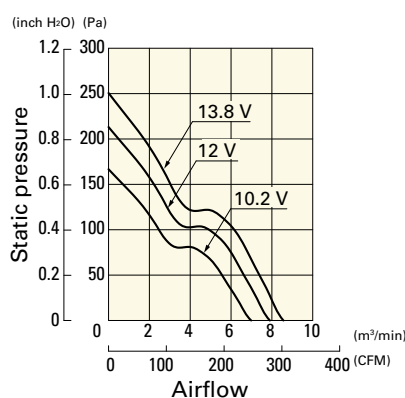

109E5712H501 With pulse sensor


Operating voltage range

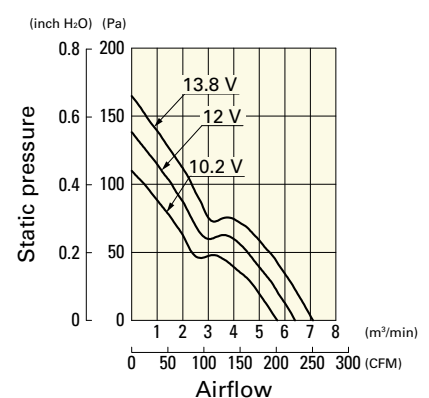

Airflow - Static Pressure Characteristics


109E5712F501 With pulse sensor

Operating voltage range

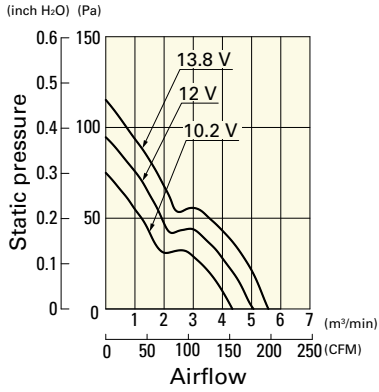


109E5712M501 With pulse sensor

Operating voltage range

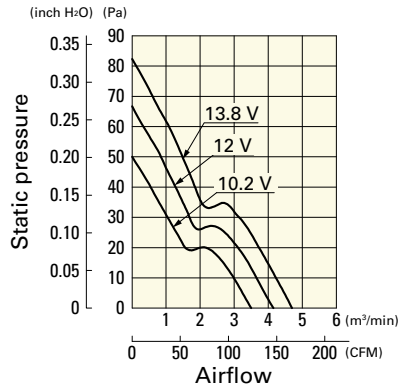


109E5724C501 With pulse sensor

Operating voltage range

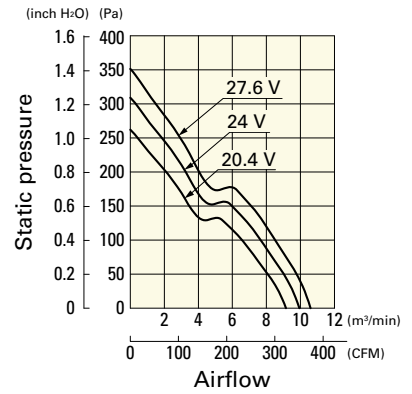


109E5724K501 With pulse sensor

Operating voltage range

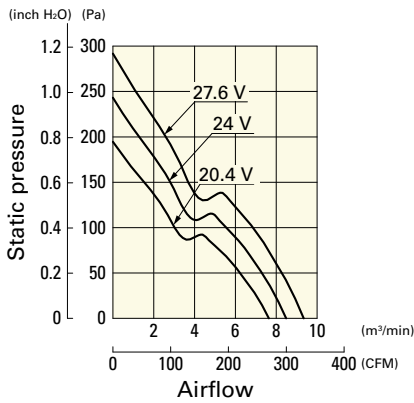


109E5724H501 With pulse sensor

Operating voltage range

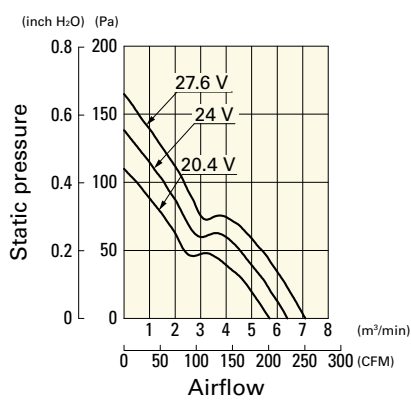


109E5724F501 With pulse sensor

Operating voltage range

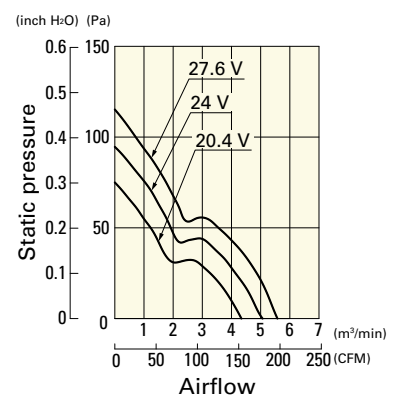


109E5724M501 With pulse sensor

Operating voltage range

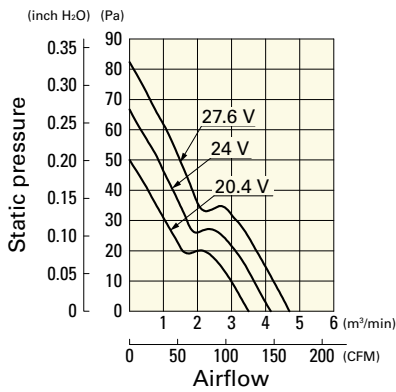


109E5748C501 With pulse sensor

Operating voltage range

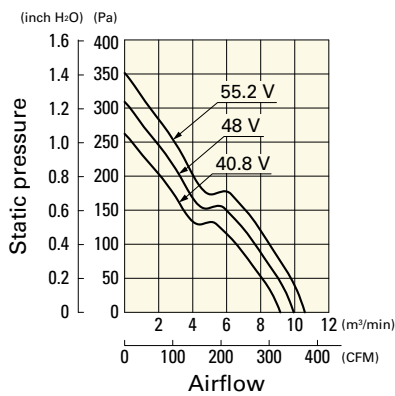


109E5748K501 With pulse sensor

Operating voltage range

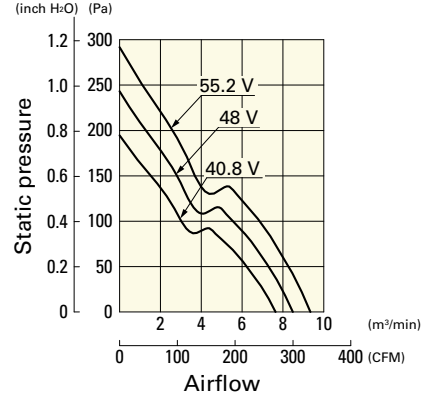


109E5748H501 With pulse sensor

Operating voltage range

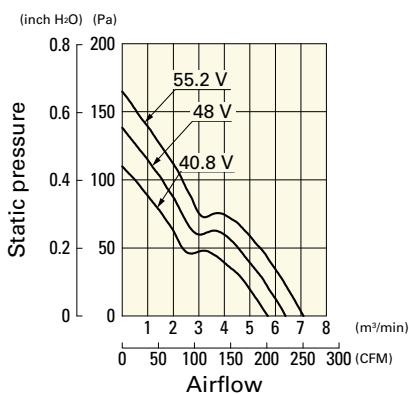


109E5748F501 With pulse sensor

Operating voltage range

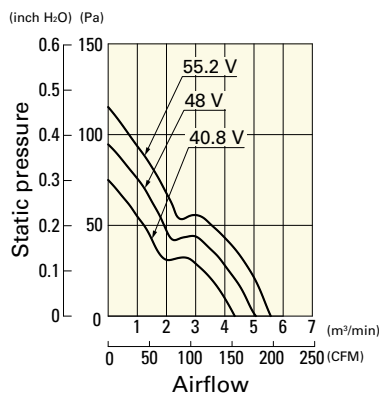

109E5748M501 With pulse sensor


Operating voltage range

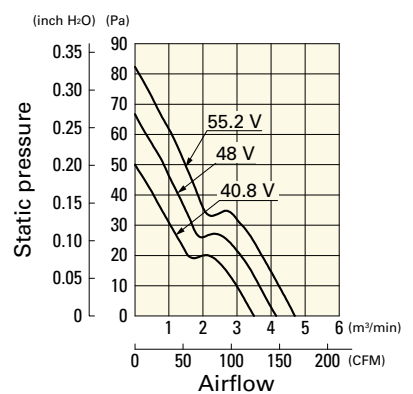


DC

DC Fan ø172 mm

■ Dimensions (unit: mm)

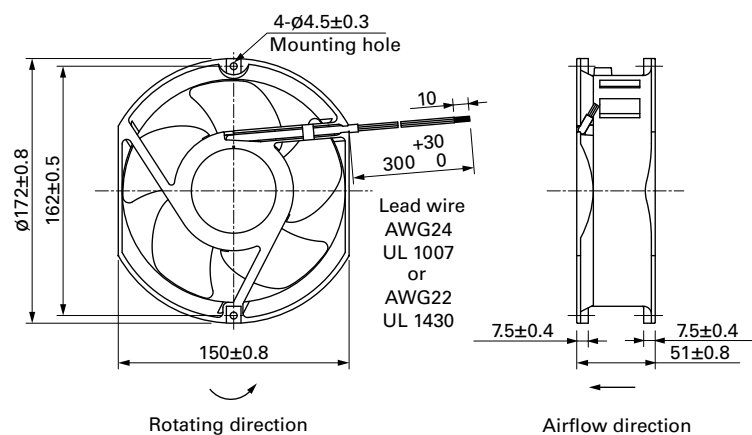

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

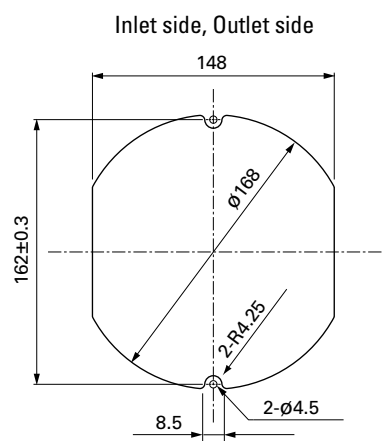

■ Options

Finger guards

page: p. 515

Model no.: 109-319E, 109-319H, 109-320

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[109E5712F501](#) [109E5712F502](#) [109E5712H501](#) [109E5712H502](#) [109E5712K501](#) [109E5712K502](#) [109E5712M501](#)
[109E5712M502](#) [109E5712M5D01](#) [109E5712Y501](#) [109E5712Y502](#) [109E5724C501](#) [109E5724C502](#)
[109E5724C5D01](#) [109E5724F501](#) [109E5724F502](#) [109E5724H501](#) [109E5724H502](#) [109E5724H5D01](#) [109E5724K501](#)
[109E5724K502](#) [109E5724K5D01](#) [109E5724M501](#) [109E5724M502](#) [109E5748C501](#) [109E5748C502](#)
[109E5748F501](#) [109E5748F502](#) [109E5748H501](#) [109E5748H502](#) [109E5748H5D01](#) [109E5748K501](#) [109E5748K502](#)
[109E5748M501](#) [109E5748M502](#) [109E5712P5K04](#) [109E5724M5D01](#) [9EH5724P5C01](#)