
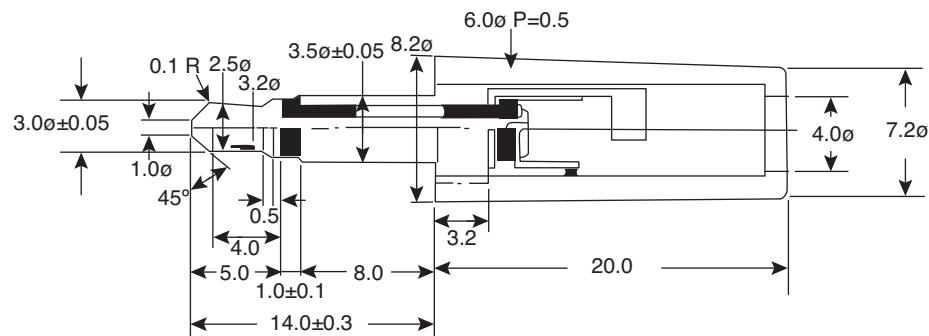



Plug

171-3500-E

KOBI CONN

Plug

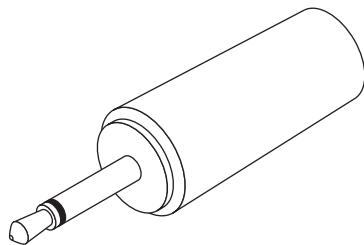

Dimensions: mm

SPECIFICATIONS

Type:	unshielded mono phone w/metal thread
Dielectric Strength:	500VAC for 1 minute
Insulation resistance:	100MΩ @ 500VDC
Contact resistance:	50mΩ max.
Body & cap:	ABS resin
Terminal & contact:	nickel plated brass
Pin:	Nickel plated steel
RoHS Compliant	

Date Last Revised: 11-24-10

171-3500-E

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300887

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[171-3500-E](#)