


1. MATERIAL AND FINISH
HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-O RATED,
COLOR: BLACK
CLAMP: BRASS, NICKEL PLATED.
TERMINAL: BRASS, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
2. END-TO-END STACKABLE WITHOUT LOSS OF CENTERLINE SPACING.
3. WIRE SIZE RANGE: 16-30 AWG, SOLID OR STRANDED.
4. TAPE AND REEL PACKAGED.
5. 24mm KAPTON DOT APPLIED TO PART

DRAWING IS RESTRICTED TO UTEC

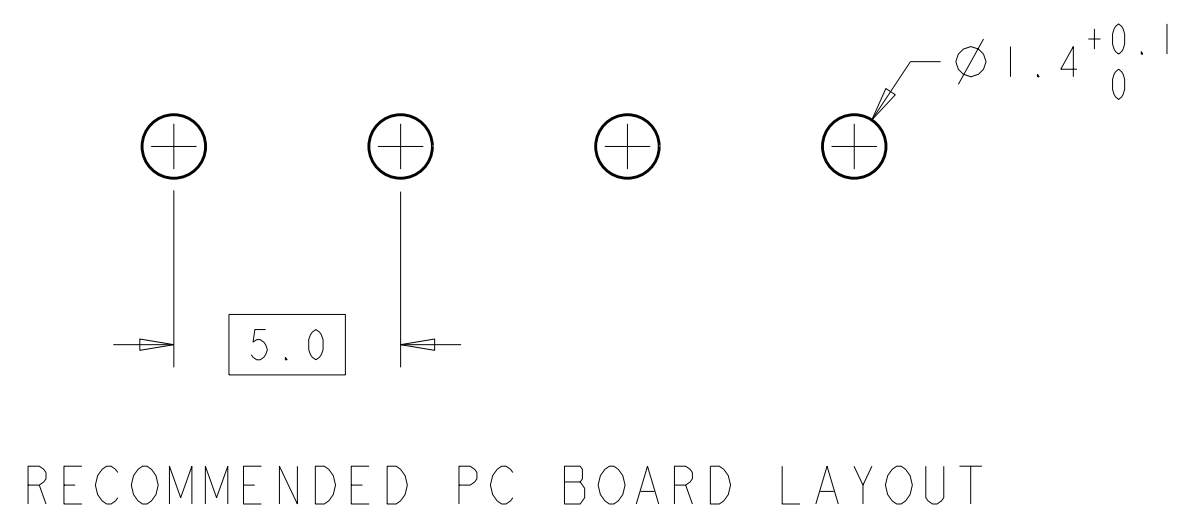

PRELIMINARY	PLASTIC	40.0	8	2-1776895-8
5	CORUGATED PAPER	40.0	8	1-1776895-8
	CORUGATED PAPER	40.0	8	1776895-8
	CORUGATED PAPER	35.0	7	19776895-7
	CORUGATED PAPER	20.0	4	1776895-4
	CORUGATED PAPER	15.0	3	1776895-3
	REEL MATERIAL	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 06OCT2006	STE TE Connectivity	
DIMENSIONS:		CHK C. RICHARD 06OCT2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. RICHARD 06OCT2006	NAME	
0 PLC ±.2		PRODUCT SPEC		
1 PLC ±.15		APPLICATION SPEC	SIZE	
2 PLC ±0.000		WEIGHT		
3 PLC ±0.000		CUSTOMER DRAWING	A200779C-1776895	
4 PLC ±0.000				
ANGLES ±2°			RESTRICTED TO	
FINISH				
			SCALE 5:1	
			SHEET 1 OF 1	
			REV B4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776895-3](#)