


DATE	REVISIONS	REV
3-6-95	CHG'D HOLDER TO 4 FEET, UPDATED SPECS./	A
9-23-96	E.C.N. #10244./	B

DRAWING NUMBER	REV
SSF-LXH340YGYD	B

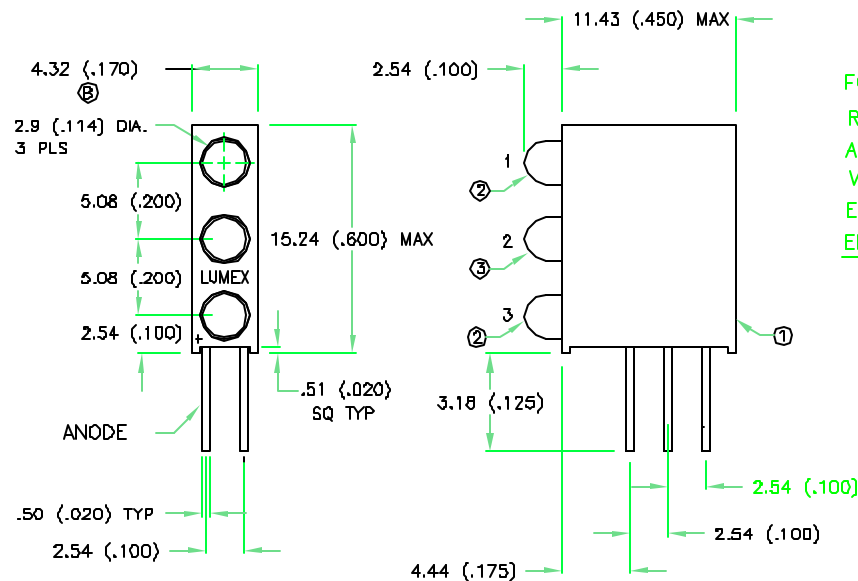

ELECTRO-OPTICAL CHARACTERISTICS TA=25 °C If=20mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	POS. 1	585 (YELLOW)		nm	
	POS. 2	585 (GREEN)			
	POS. 3	585 (YELLOW)			
FORWARD VOLTAGE		2.1	2.8	V _f	
REVERSE VOLTAGE	5.0			V _r	I _r =100uA
AXIAL INTENSITY		15		md	I _f =20mA
VIEWING ANGLE		80		2x theta	
EMITTED COLOR:	POS. 1-YELLOW	POS. 2-GREEN	POS. 3-YELLOW		
EPOXY LENS FINISH:	YELLOW & GREEN DIFFUSED				

(A) LIMITS OF SAFE OPERATION AT 25 DEG. C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT(Y/G)*	150	mA
STEADY CURRENT(Y/G)	30/25	mA
POWER DISSIPATION(Y/G)	105	mW
DERATE FROM 25 °C	-1.6	mW/ °C
OPERATING, STORAGE TEMP.	-40 TO +85	°C
LEAD SOLDERING TEMP.	+260	°C
2.0mm FROM BODY	3 SEC. MAX	

* t<10uS

BILL OF MATERIALS:

- SSH-LXH340 HOLDER. MATERIAL: BLACK NYLON 94V-D.
- SSL-LX3044YD LED.(2 PCS.)
- SSL-LX3044GD LED.

RELIABILITY NOTE:

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

		290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 (847) 359-2790	
		CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.	
DATE: 10-12-94	DWN:	CHK'D:	APPD:
SCALE: N/A			
T-3mm LED, RIGHT ANGLE FAULT INDICATOR, YELLOW/GREEN/YELLOW DIFFUSED			
PAGE 1 OF 1	DRAWING NUMBER SSF-LXH340YGYD		REV B

MS/DK

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

[SSF-LXH340YGYD](#)