

Features

- Resistance range: 100 ohms to 1 megohm
- SIP and DIP packages
- Surface mount and through-hole available
- RoHS compliant* (see How to Order "Termination" option)

For information on R/2R Thick Film Networks, download Bourns' R/2R Application Note.

R/2R Series Thick Film Networks

Product Characteristics

See applicable model data sheet for complete list of product characteristics.

Environmental Characteristics

See applicable model data sheet for complete list of environmental characteristics.

Physical Characteristics

See applicable model data sheet for complete list of physical characteristics.

How To Order

Model
(See "Available Models")

Electrical Configuration
R2R = Standard R/2R**
121 = Reversed R/2R***

Resistance Code (for value of R)

• First 2 digits are significant; third digit represents the

third digit represents the number of zeros to follow.

• 2R is double the value of R in circuit.

Terminations

LF = Tin-coated (RoHS compliant version) (Model 4416P is ONLY available in the RoHS compliant version.)


Blank = Tin/Lead

(Model 4416P is not available with tin/lead terminations.)

For Standard Values Used in Capacitors, Inductors, and Resistors, click here.

Typical Part Marking


Represents total content. Layout may vary.




Product Dimensions

See applicable model data sheet for complete product dimensions.

Resistor Schematic

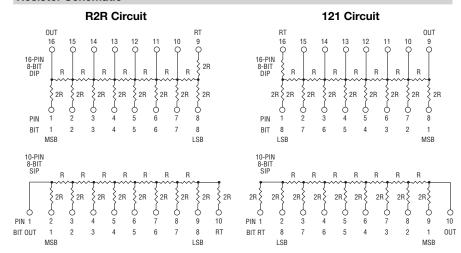

Power Derating Curve

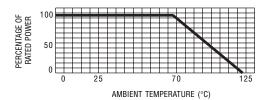

Power Rating per Resistor

	Power per Resistor
Model	(Watts)
4100R, 4300R, 4400P, 4600X***, 4800P	0.125
4300M, 4600M***	0.170
4300H	0.200

^{**}Standard R2R Electrical Configuration not available for Model 4600H Series.

^{***}Reversed R/2R Electrical Configuration not available for Model 4600H, 4600M or 4600X Series.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

4608X-R2R-105LF 4606X-R2R-103LF