




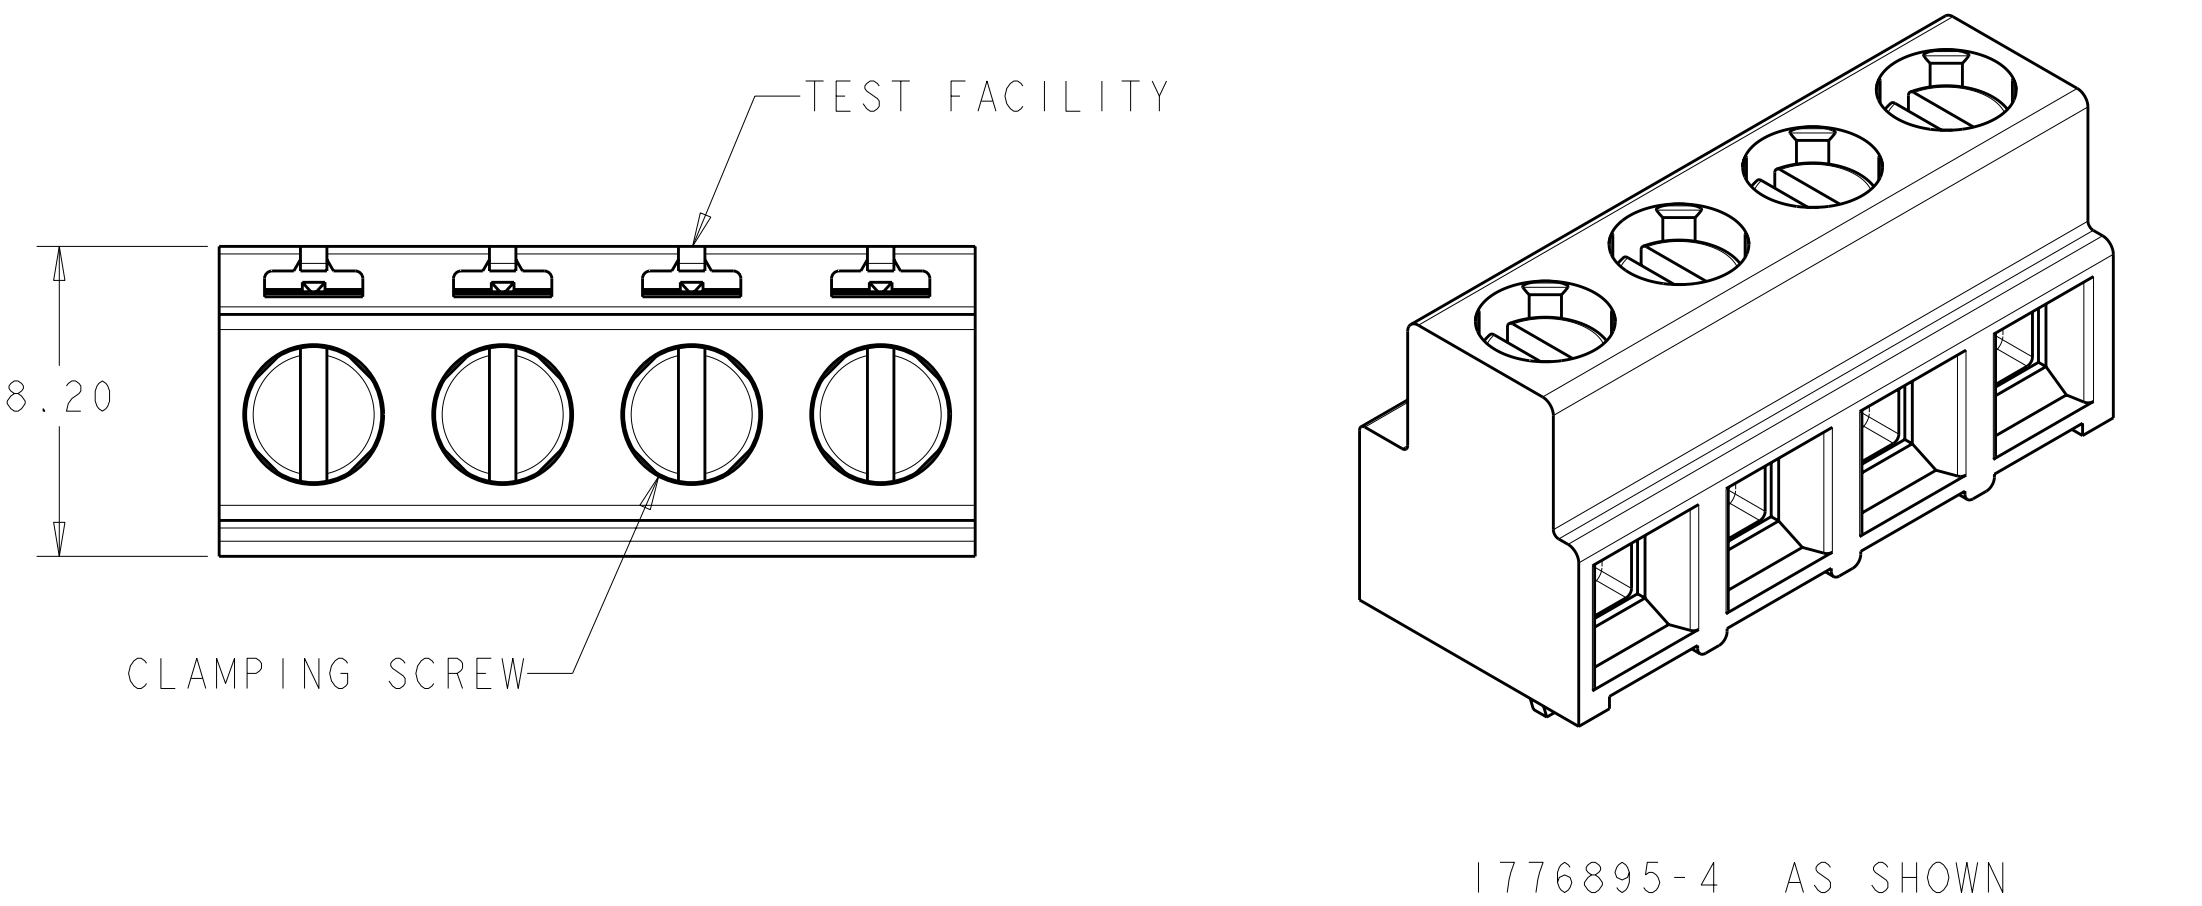

1. MATERIAL AND FINISH
HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-O RATED,
COLOR: BLACK
CLAMP: BRASS, NICKEL PLATED.
TERMINAL: BRASS, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
2. END-TO-END STACKABLE WITHOUT LOSS OF CENTERLINE SPACING.
3. WIRE SIZE RANGE: 16-30 AWG, SOLID OR STRANDED.
4. TAPE AND REEL PACKAGED.
5. 24mm KAPTON DOT APPLIED TO PART

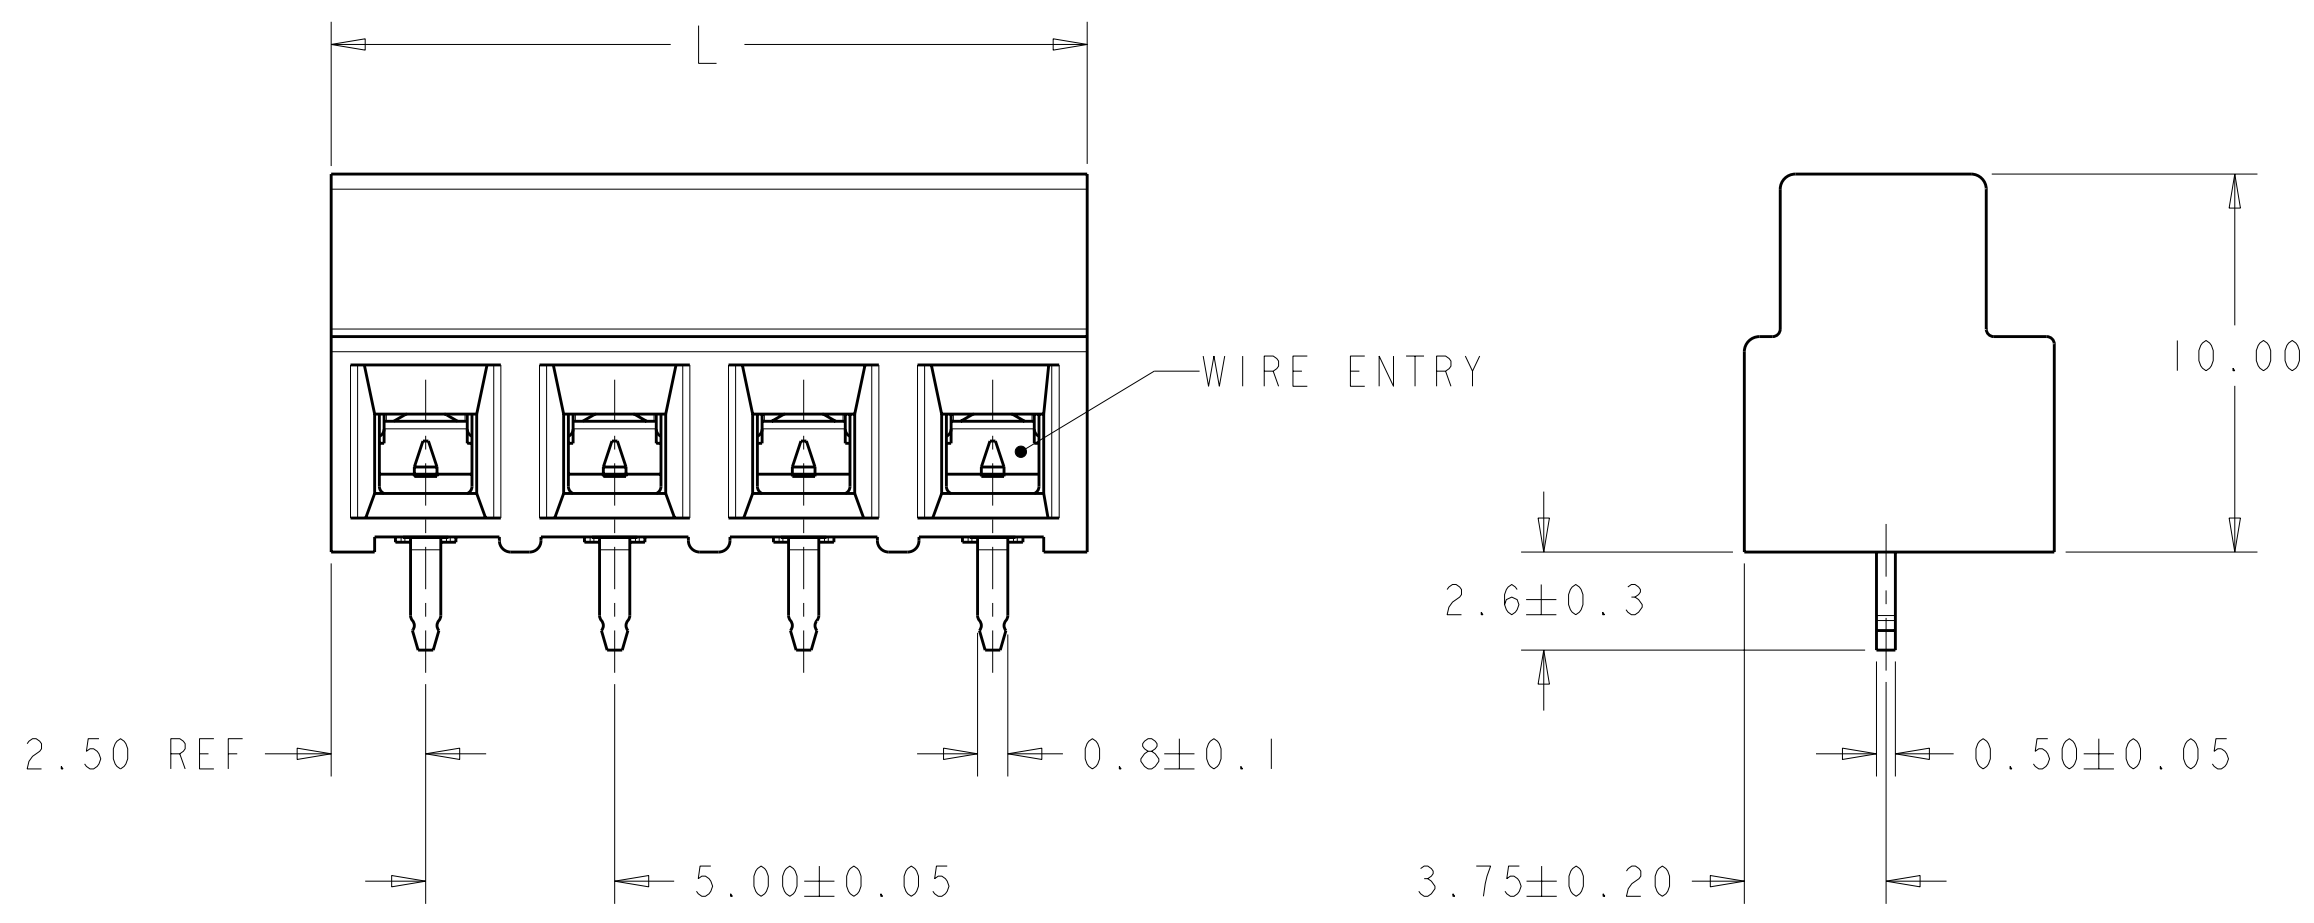

DRAWING IS RESTRICTED TO UTEC

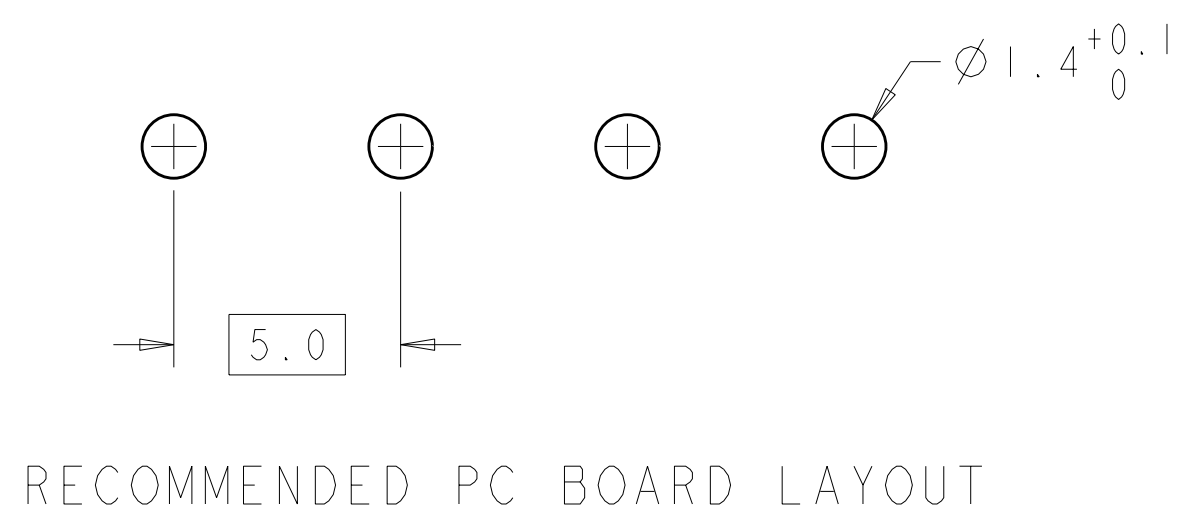

PRELIMINARY	PLASTIC	40.0	8	2-1776895-8
5	CORUGATED PAPER	40.0	8	1-1776895-8
	CORUGATED PAPER	40.0	8	1776895-8
	CORUGATED PAPER	35.0	7	19776895-7
	CORUGATED PAPER	20.0	4	1776895-4
	CORUGATED PAPER	15.0	3	1776895-3
	REEL MATERIAL	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 06OCT2006	TE Connectivity	
DIMENSIONS:		CHK C. RICHARD 06OCT2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. RICHARD 06OCT2006	NAME TERMINAL BLOCK ASSEMBLY, PCB MOUNT, STACKING, SIDE WIRE ENTRY, WITH INTERLOCK, 5.00mm PITCH	
mm		PRODUCT SPEC		
0 PLC ±.2		APPLICATION SPEC	SIZE	
1 PLC ±.15			CAGE CODE	
2 PLC ±.15			DRAWING NO	
3 PLC ±0.000			RESTRICTED TO	
4 PLC ±0.000			A200779C-1776895	
ANGLES ±2°		WEIGHT	SCALE	
FINISH		-	5.1	
-		CUSTOMER DRAWING	SHEET	
			OF	
			REV	
			B4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776895-8](#)