

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0462071208](#)

Status: **Active**

Overview: [Mini-Fit Jr. Power Connectors](#)

Description: 4.20mm Pitch, Mini-Fit Jr. Reflow Solder Capable, Tray Header, Dual Row, Vertical, 8 Circuits, 3.18mm PCB Thickness, without PCB Pegs, LCP Housing, with Tin (Sn) Over Nickel (Ni) Plating, Glow-Wire Capable, Tray

Documents:

3D Model	Product Specification PS-5556-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-46207-001-000 (PDF)
Product Specification PS-45750-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	46207
Application	Board-to-Board, Power, Wire-to-Board
Comments	Current for wire-to-wire applications = 13.0A max. per circuit. Current for wire-to-board applications = 9.0A max. per circuit
Overview	Mini-Fit Jr. Power Connectors
Product Name	Mini-Fit Jr.
UPC	883906251680

Physical

Breakaway	No
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.978/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	5.26mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	3.18mm
Packaging Type	Tray
Pitch - Mating Interface	4.20mm
Pitch - Termination Interface	4.20mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes

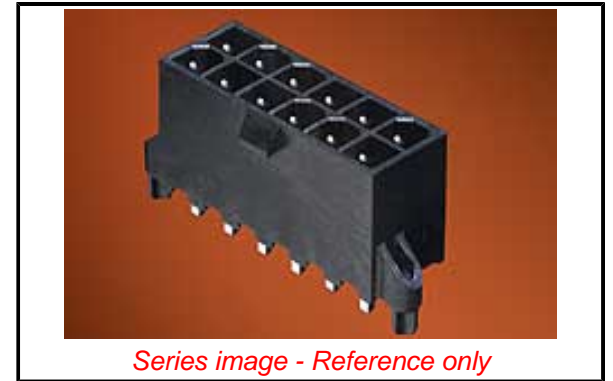

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[46207](#) Series

Mates With

[5557](#) Mini Fit Jr. Receptacle

Temperature Range - Operating -40° to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 13.0A
Voltage - Maximum 600V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds) 030
Lead-freeProcess Capability SMC&WAVE
Max. Cycles at Max. Process Temperature 003
Process Temperature max. C 265

Material Info

Reference - Drawing Numbers

Packaging Specification PK-46207-001-000
Product Specification PS-45750-001-001, PS-5556-001-001
Sales Drawing SD-46207-002-000

This document was generated on 10/19/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[46207-1208](#)