
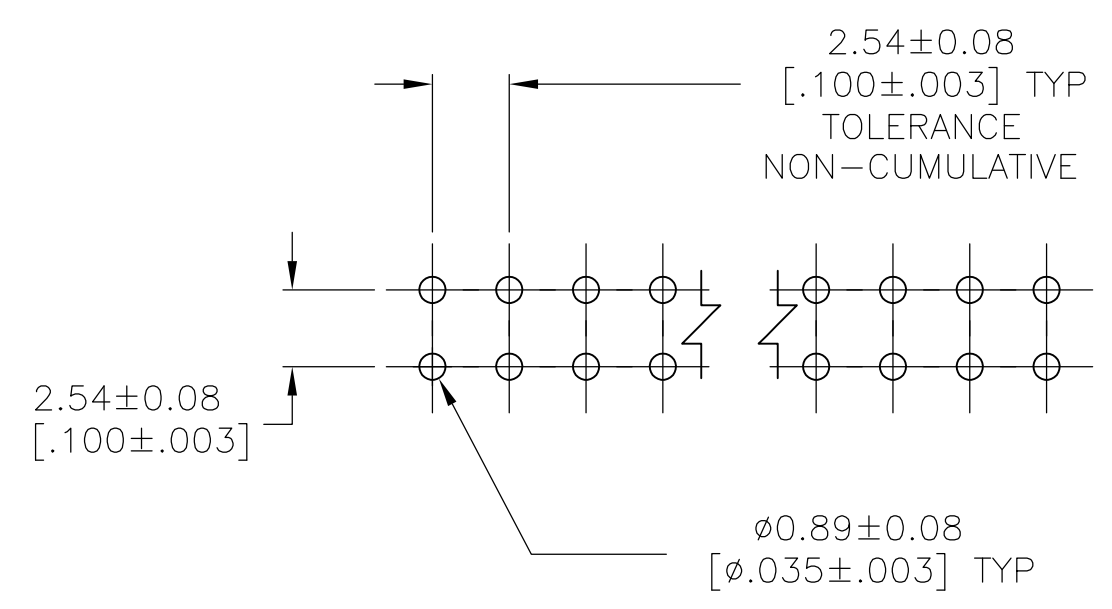
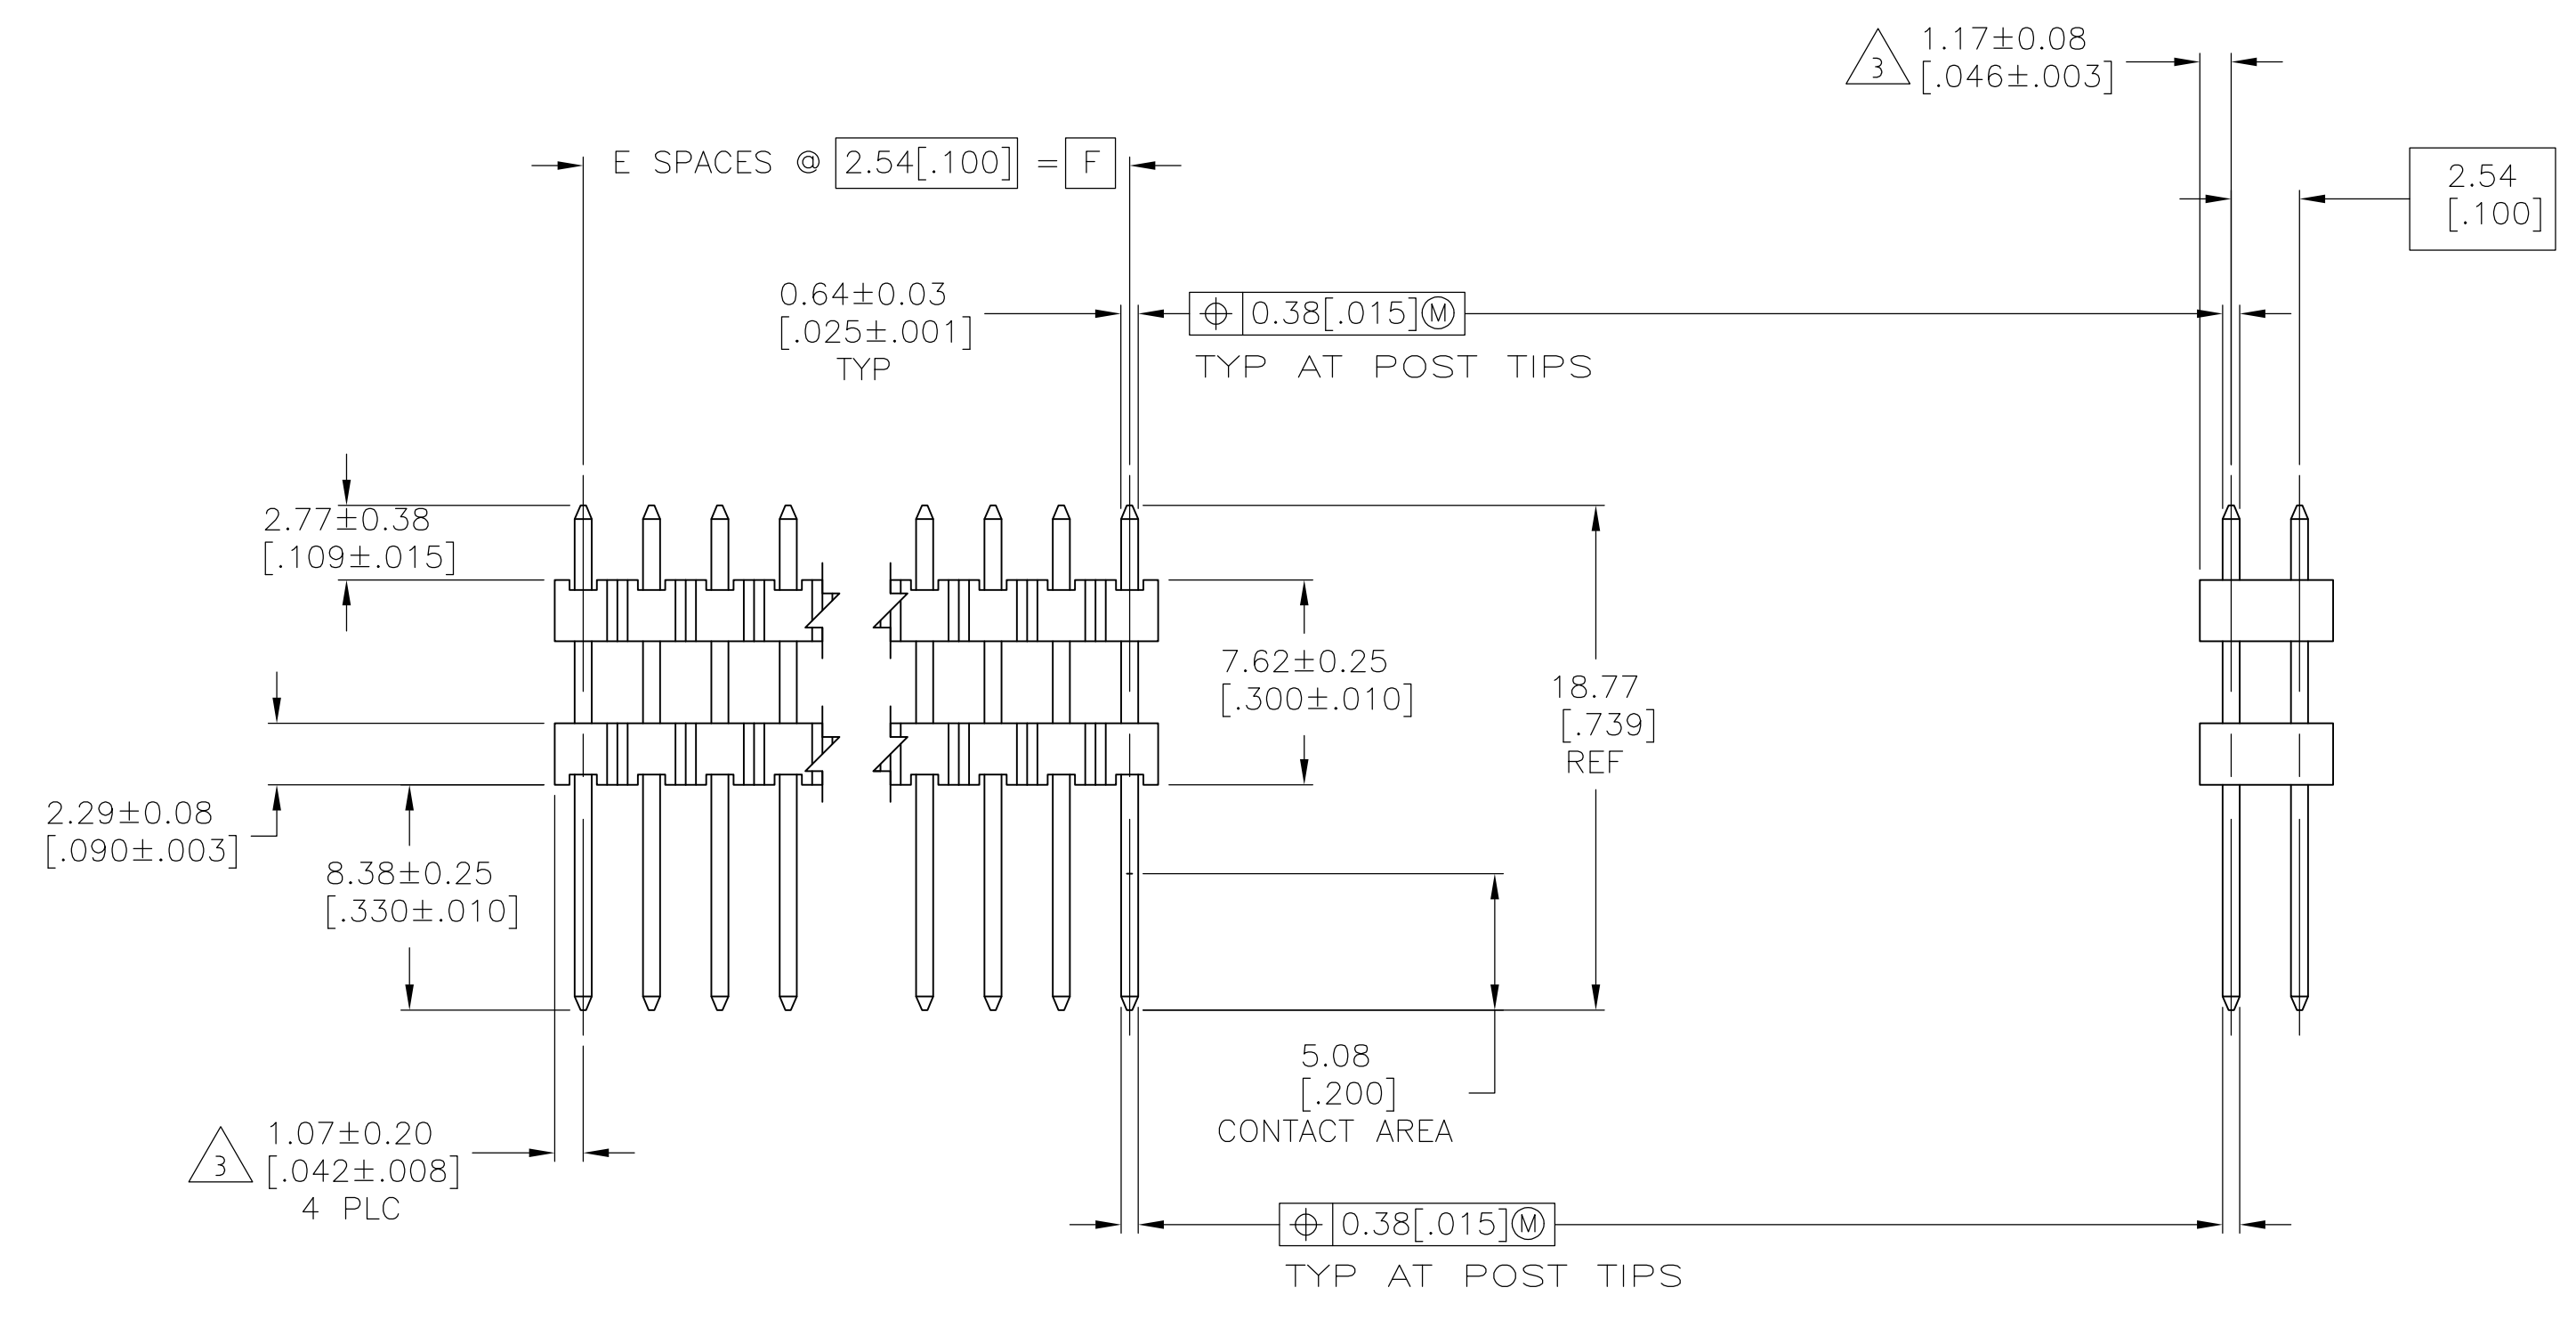


D

C

B

A

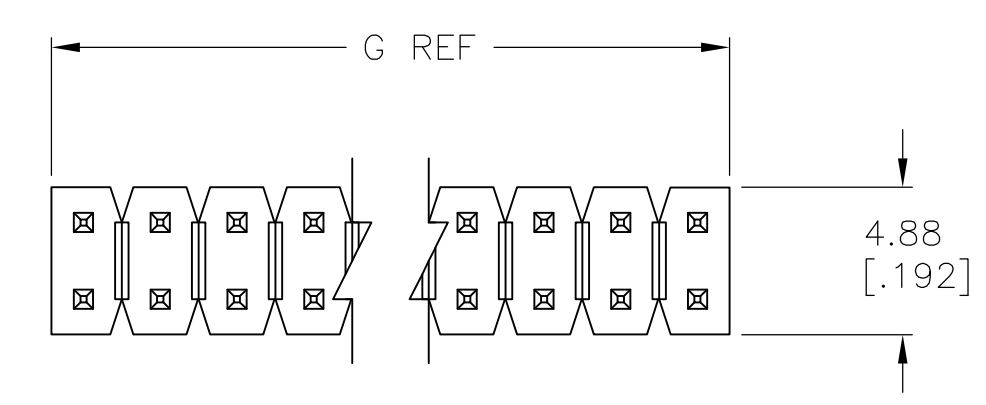

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK. CONTACT: COPPER ALLOY
- 5 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.
- 6 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

R. BROWN

19OCT2006

CHK

J. GESFORD

19OCT2006

APPD

J. GESFORD

19OCT2006

NAME

HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

DIMENSIONS:

mm [INCHES]

0 PLC

± -

1 PLC

± 0.5[.02]

2 PLC

± 0.13[.005]

3 PLC

± -

4 PLC

± -

ANGLES

± -

FINISH

SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

± -

± 0.5[.02]

± 0.13[.005]

± -

± -

± -

SEE TABLE

MATERIAL

4

SIZE

A1

CAGE CODE

00779

DRAWING NO

146490

RESTRICTED TO

-

CUSTOMER DRAWING

SCALE

4:1

SHEET

1

OF

2

REV

B

TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[146490-6](#)