


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F1	REV PER ECR 09-016980	03AUG09	JR	TM
	F2	REVISED PER ECO-17-014333	11OCT2017	RS	DR

AMP WIRE RANGE
2/0 AWG STRANDED

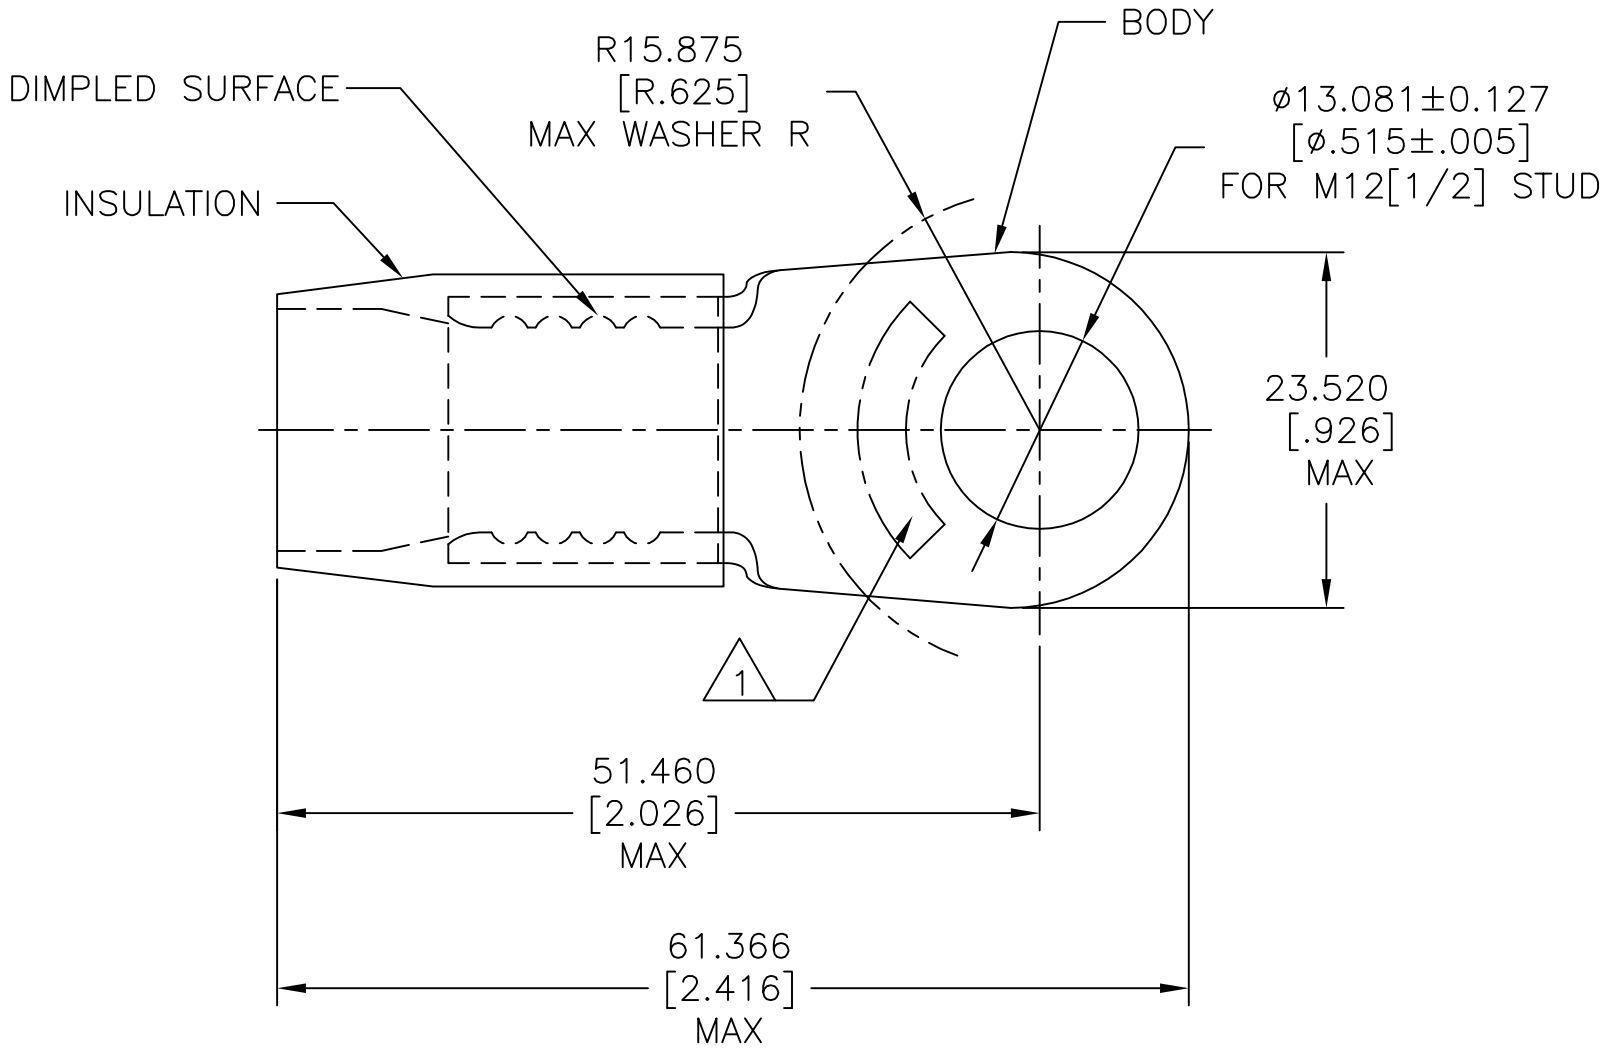

- 1 STAMP AMP 2/0 W*, LOCATE APPROX AS SHOWN.
- 2 BODY MATERIAL THK 2.032±0.051 [.080±.002]
- 3 WIRE INSULATION 15.494 [0.610] MAX.
- 4 BODY: COPPER PER ASTM B-152
INSULATION: NYLON ASTM D4066 TYPE I.
- 5 BODY: TIN PLATED PER ASTM B-545
INSULATION: COLOR-YELLOW.

MS25036-137 CLASS 2	50	LOOSE PC	324085
MILITARY P/N AND CLASS	QTY	PACKAGE TYPE	PART NO

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C[221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.S. GOULDEN 9-28-93	TE Connectivity			
VOLTAGE RATING: —	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK R. HERSEY 9-28-93				
CIRCULAR MIL AREA: 60.6-76.3mm² [119,500-150,500] STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± - FINISH	APVD M ELLIS 9-28-93	NAME TERMINAL, RING TONGUE, PLASTI-GRIP, WIRE SIZE: 2/0 AWG			
	MATERIAL 4		PRODUCT SPEC SAE AS7928	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			APPLICATION SPEC —	—	—	—	—
			WEIGHT —	A3	00779	C=324085	—
			CUSTOMER DRAWING	SCALE NTS	SHEET 1 OF 1	REV F2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[324085](#)