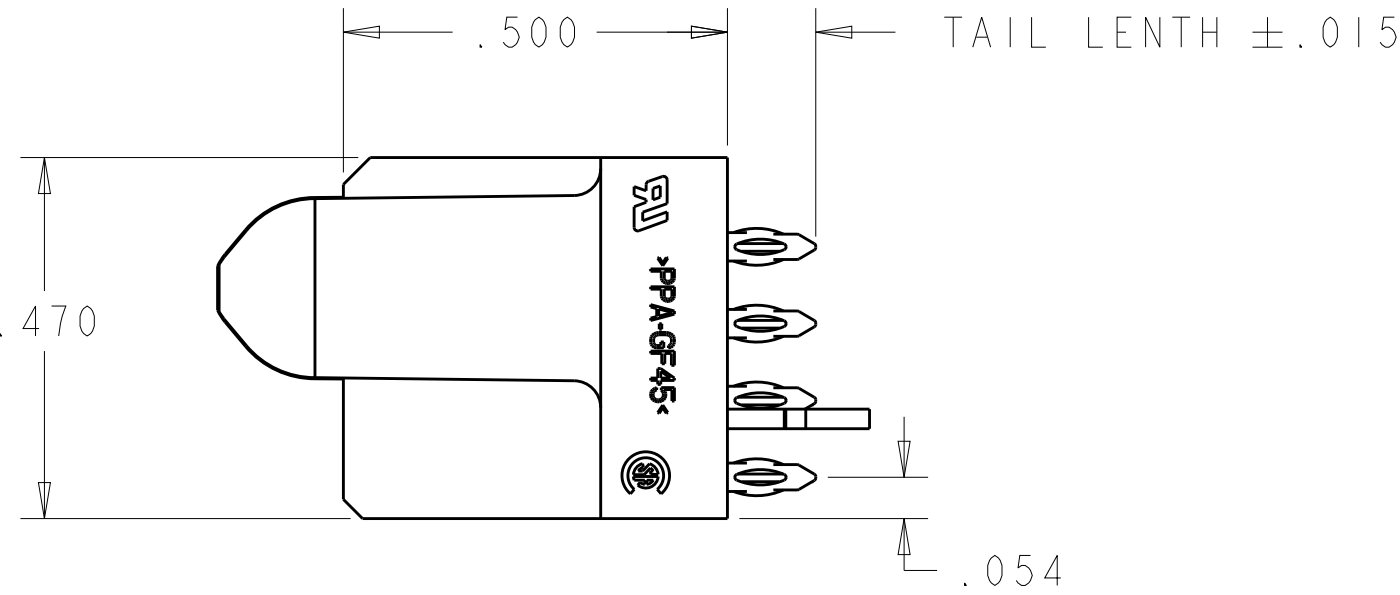
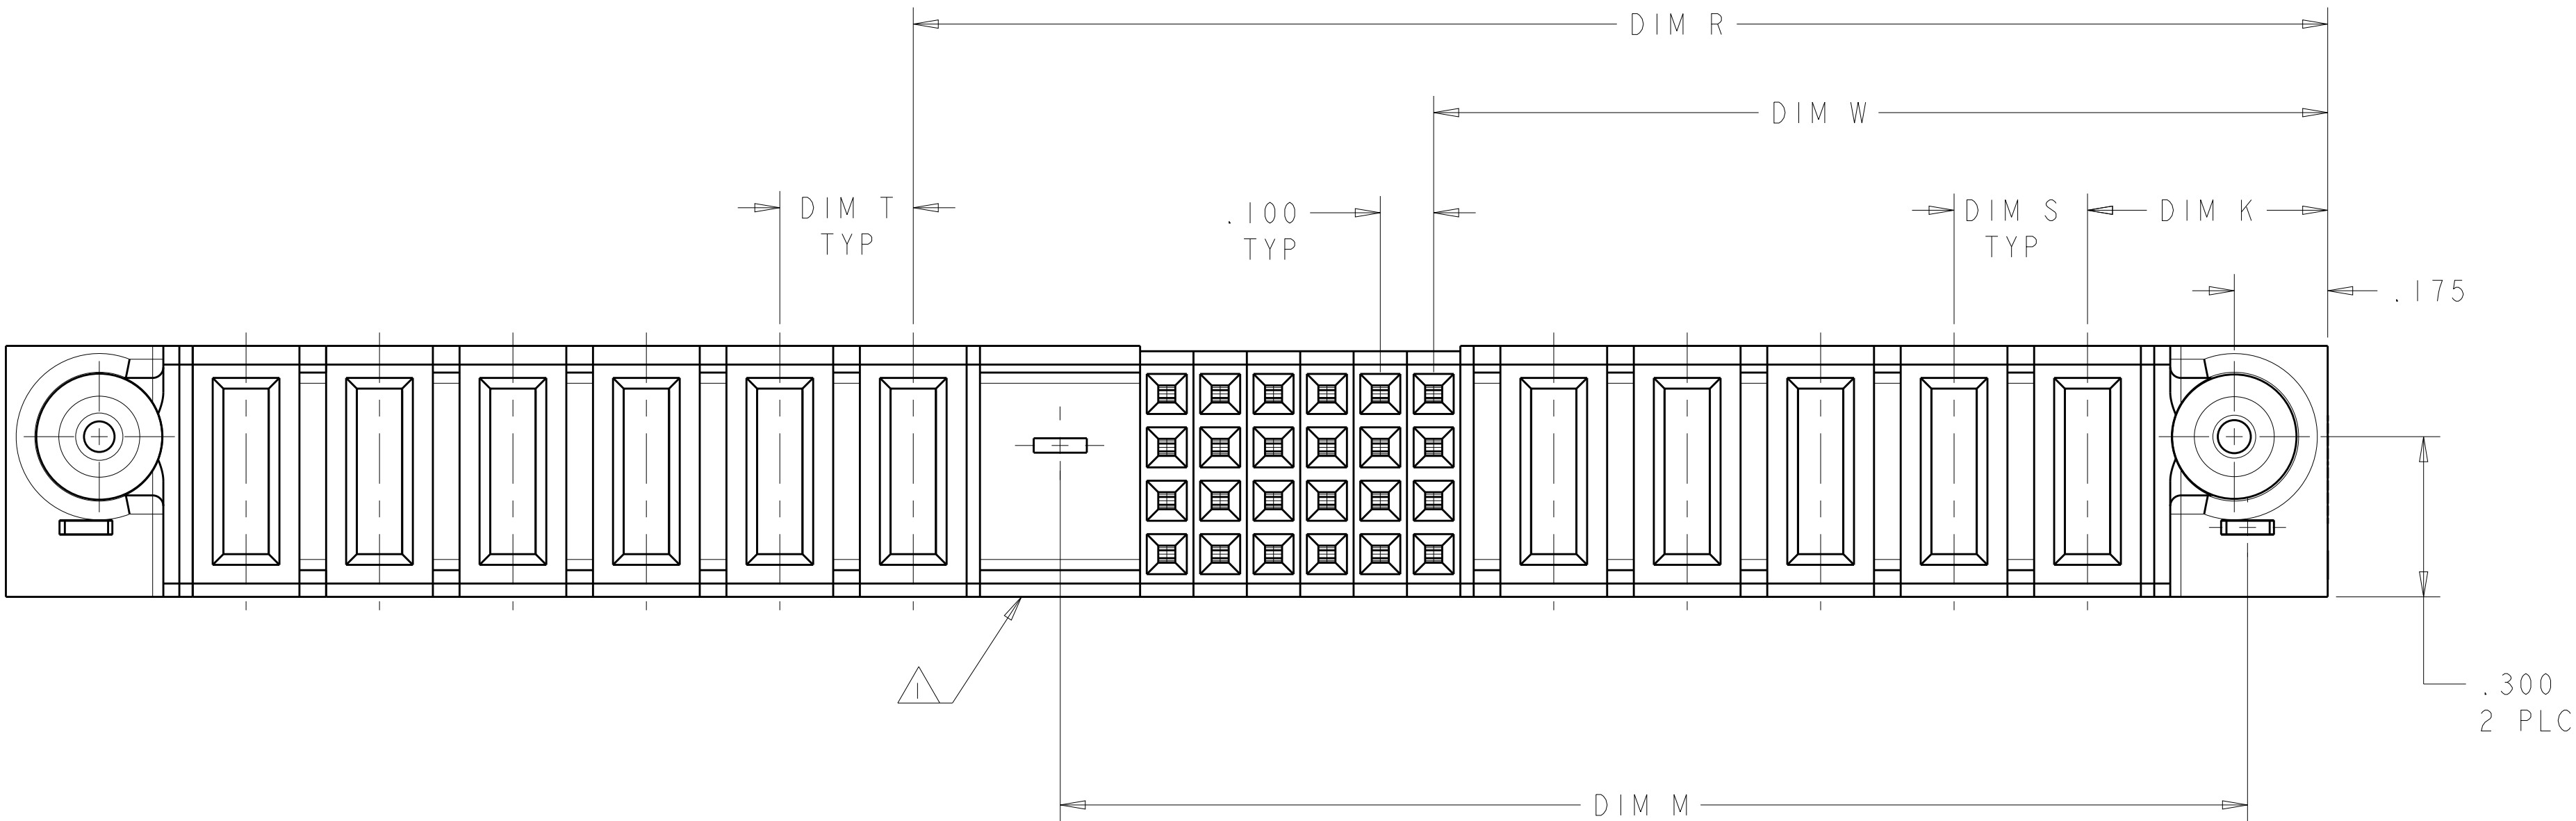
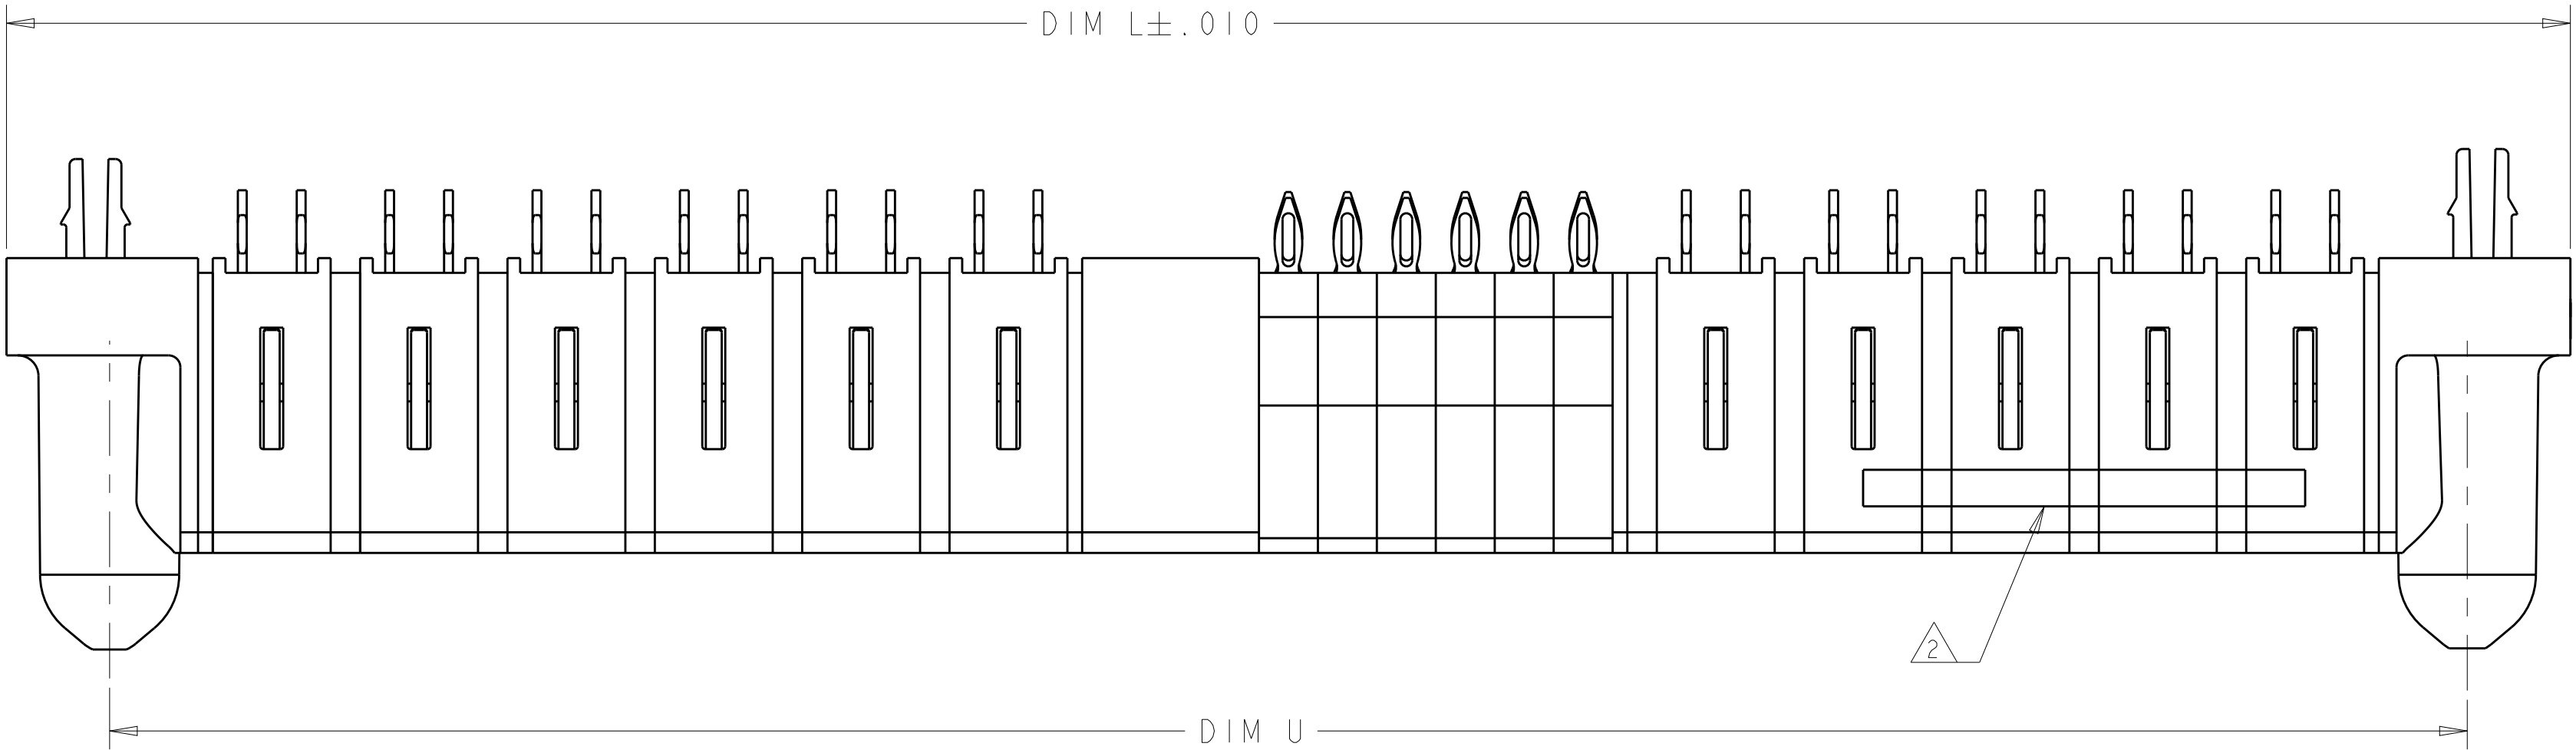
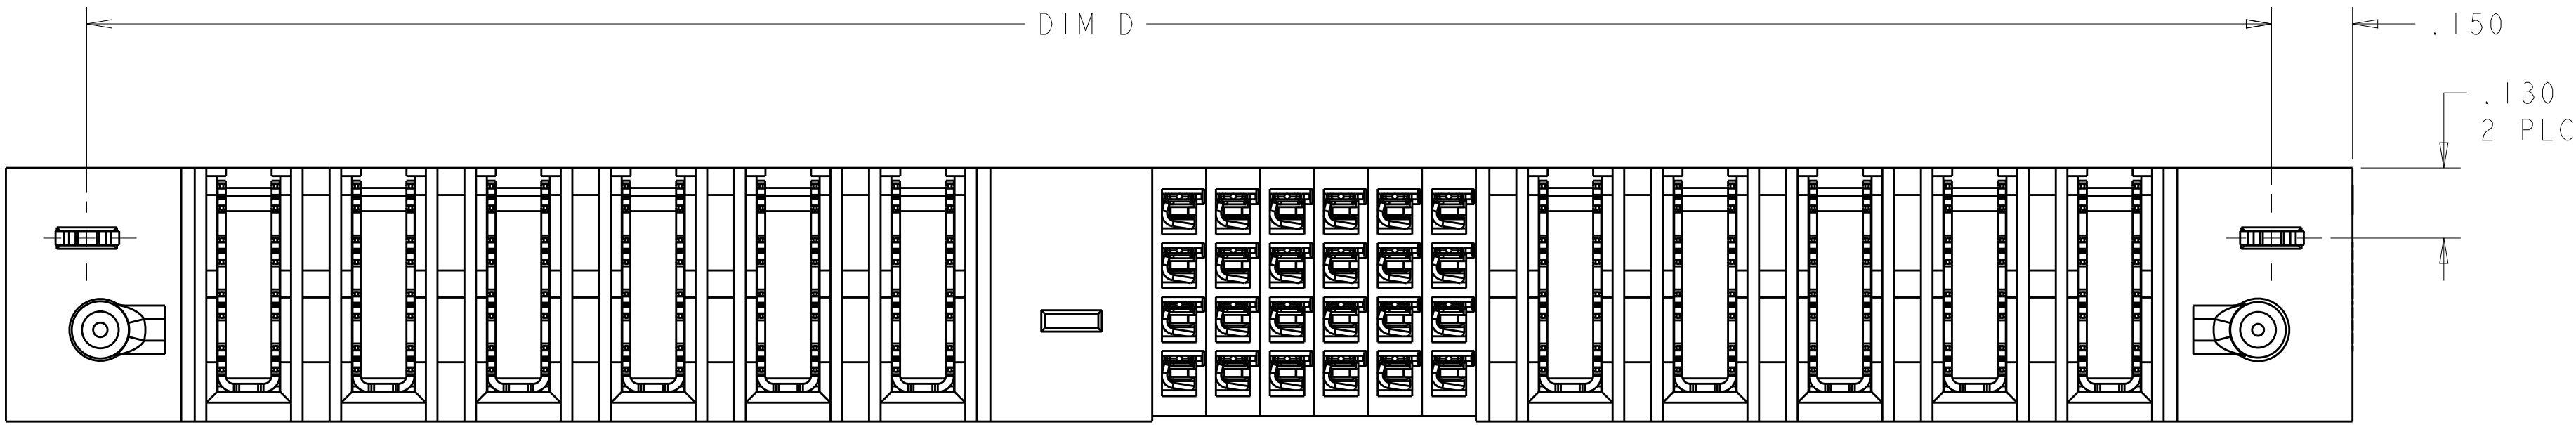


LOC		DIST		REVISIONS				
ES	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		K9		REV PER ECR-12-018831	30OCT2012	AY	SZ	



- 1
- OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2
- "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3
- MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4
- CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER CONTACTS AND SIGNAL CONTACTS.
- 5
- MECHANICAL CONNECTOR KEEP OUT ZONE
- 6
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8
- PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 9
- VARAIBLE DIMENSION SHOWN VIEW (SHEET 6)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity					
		CHK M. PERCHERKE 29APR05							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL				
INCHES									
	0 PLC	±		PRODUCT SPEC		APPLICATION SPEC			
	1 PLC	±							
	2 PLC	±	.01						
	3 PLC	±	.005						
	4 PLC	±	.0020						
ANGLES		±°		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL	FINISH	WEIGHT		A1		00779	G=6450540	-	
				CUSTOMER DRAWING		SCALE	2:1	SHEET 1 OF 19	REV K9

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

K9	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-6
	2.550	2.500	.250	.250	1.650	1.375	-	2.85	.450	4P + 8S + 4P	6-6450540-5
	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-2
	-	3.300	.200	.200	2.200	1.625	-	3.650	.450	6P + 20S + 6P	6-6450540-1
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	6-6450540-0
	2.050	2.000	.250	.250	1.650	.925	-	2.350	.450	2P + 24S + 2P	5-6450540-9
	2.050	2.000	.250	.250	1.400	1.125	-	2.350	.450	3P + 8S + 3P	5-6450540-5
	2.500	2.450	.250	.250	1.850	1.375	-	2.800	.450	4P + 16S + 3P	5-6450540-4
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	5-6450540-3
	1.350	1.300	-	-	1.200	.675	-	1.650	.450	1P + 16S + 1P	5-6450540-2
	1.750	1.700	.250	.250	1.350	.875	-	2.050	.450	2P + 16S + 2P	5-6450540-1
	5.950	5.900	.250	.250	3.550	2.8750	-	6.250	.450	10P + 24S + 10P	5-6450540-0
	5.150	5.100	.250	.250	3.250	2.375	-	5.450	.450	8P + 32S + 8P	4-6450540-9
	1.250	1.200	-	-	1.100	.625	-	1.550	.450	1P + 16S + 1P	4-6450540-8
	2.150	2.100	.250	.250	1.500	1.175	-	2.450	.450	3P + 8S + 3P	4-6450540-7
	1.150	1.100	-	-	1.000	.675	-	1.450	.450	1P + 8S + 1P	4-6450540-6
	-	-	-	.200	-	-	-	2.820	.450	12HDP	4-6450540-5
	-	-	.200	.200	2.600	1.625	-	3.970	.450	6HDP + 36S + 7HDP	4-6450540-4
	2.65	2.60	.250	.250	2.250	1.625	-	2.950	.450	5P + 20S + 2P	(E)4-6450540-3
	-	-	-	.200	-	-	-	2.620	.450	11HDP	(E)4-6450540-2
	-	-	.200	.200	2.600	1.625	-	3.770	.450	6P + 36S + 6P	4-6450540-1
	-	-	.200	.200	4.500	3.425	-	7.470	.450	15P + 40S + 15P	4-6450540-0
	-	-	.200	.200	-	-	-	7.470	-	15P + 40S + 15P	(D)3-6450540-9
	4.650	4.600	.250	.250	3.250	1.875	-	4.950	.450	6P + 52S + 6P	(D)2-6450540-7
	1.950	1.900	-	-	1.550	.875	-	2.250	.450	2P + 24S + 2P	(D)2-6450540-5
	2.450	2.400	.250	.250	1.800	1.125	-	2.750	.450	3P + 24S + 3P	(D)2-6450540-0
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	(E)1-6450540-8
	-	5.450			3.075	2.425	-	5.800	.425	10P + 24S + 12P	1-6450540-4
	3.250	3.200	.200	.200	2.125	1.575	-	3.550	.425	6P + 20S + 6P	1-6450540-2
	-	2.850	.250	.250	2.000	1.125	-	3.200	.450	3P + 32S + 4P	1-6450540-1
	1.950	1.900	.250	.250	1.550	.875	-	2.250	.450	2P + 24S + 2P	1-6450540-0
	-	1.400	.250	.250	1.300	.625	-	1.750	.450	1P + 24S + 1P	6450540-7
	-	2.400	.250	.250	2.050	1.375	-	2.750	.450	4P + 24S + 2P	6450540-6
	-	3.100	.250	.250	2.000	1.625	-	3.450	.450	5P + 12S + 5P	6450540-5
	-	3.400	.250	.250	2.050	1.375	-	3.750	.450	4P + 24S + 6P	6450540-4
	-	7.400	.250	.250	5.050	2.875	-	7.750	.450	10P + 84S + 10P	6450540-3
	-	4.000	.250	.250	2.650	1.675	2.225	4.350	.450	5P+24S+1M+6P	6450540-2
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	6450540-1
	D	U	T	S	R	W	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES



MATERIAL

0 PLC ±.1
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

0 PLC ±.1
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

29APR05
29APR05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450540

RESTRICTED TO
-

SCALE
2:1



SHEET
2


OF
19

REV
K9


ITE Connectivity

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
ES	00	-	-	SEE SHEET 1	-


PART NUMBER	ROWS		POWER	SIGNAL							POWER		
			P2	6	5	4	3	2	1	PI			
6450540-1	D C B A		GP	AP	AP	AP	AP	AP	AP	AP	GP		
				AP	AP	AP	AP	AP	AP	AP			
				AP	AP	AP	AP	AP	AP	AP			
				AP	AP	AP	AP	AP	AP	AP			
IP + 24S + IP													

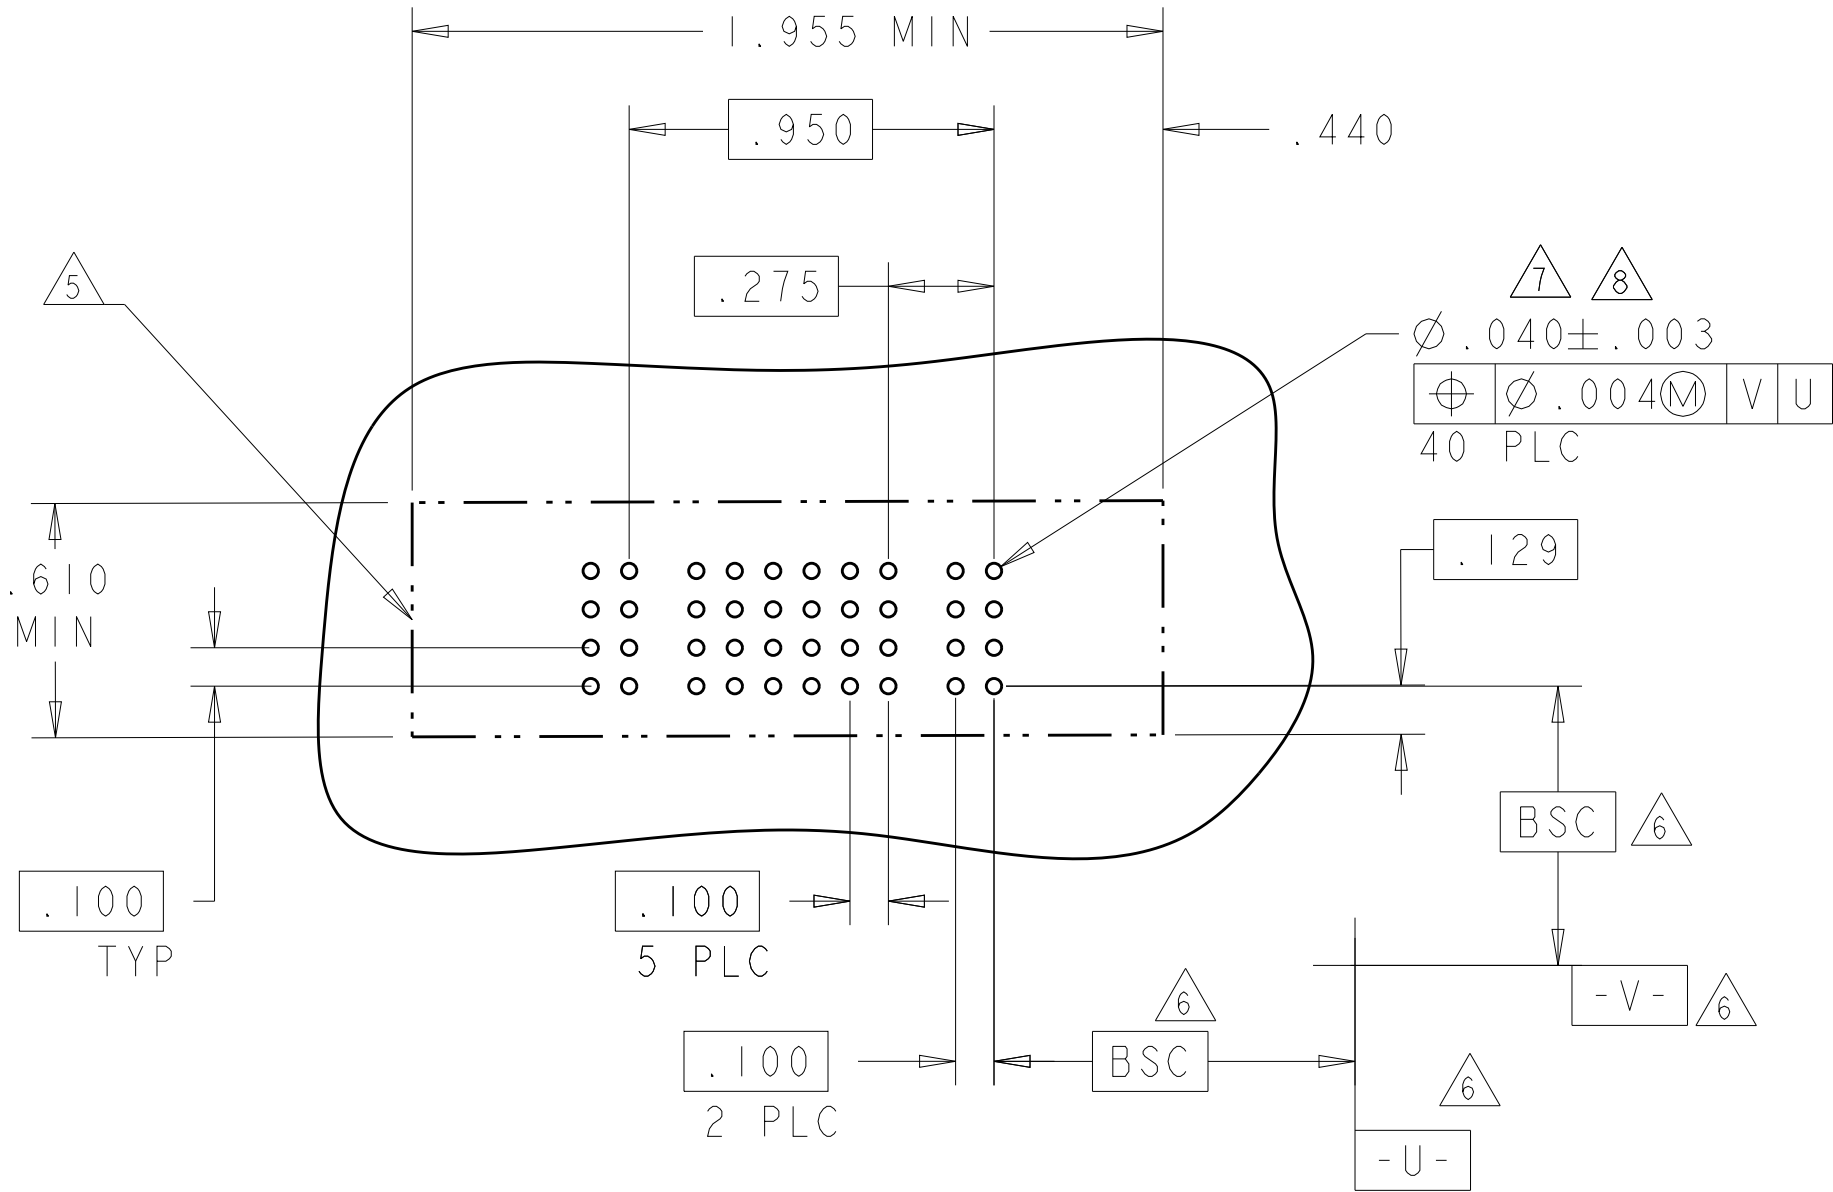

PART NUMBER	ROWS		POWER							SIGNAL						POWER					
			P11	P10	P9	P8	P7	P6		M1	6	5	4	3	2	1	P5	P4	P3	P2	
6450540-2	D C B A									AP	AP	AP	AP	AP	AP						
										AP	AP	AP	AP	AP	AP						
										AP	AP	AP	AP	AP	AP						
										AP	AP	AP	AP	AP	AP						
5P + 24S + 1M + 6P																					

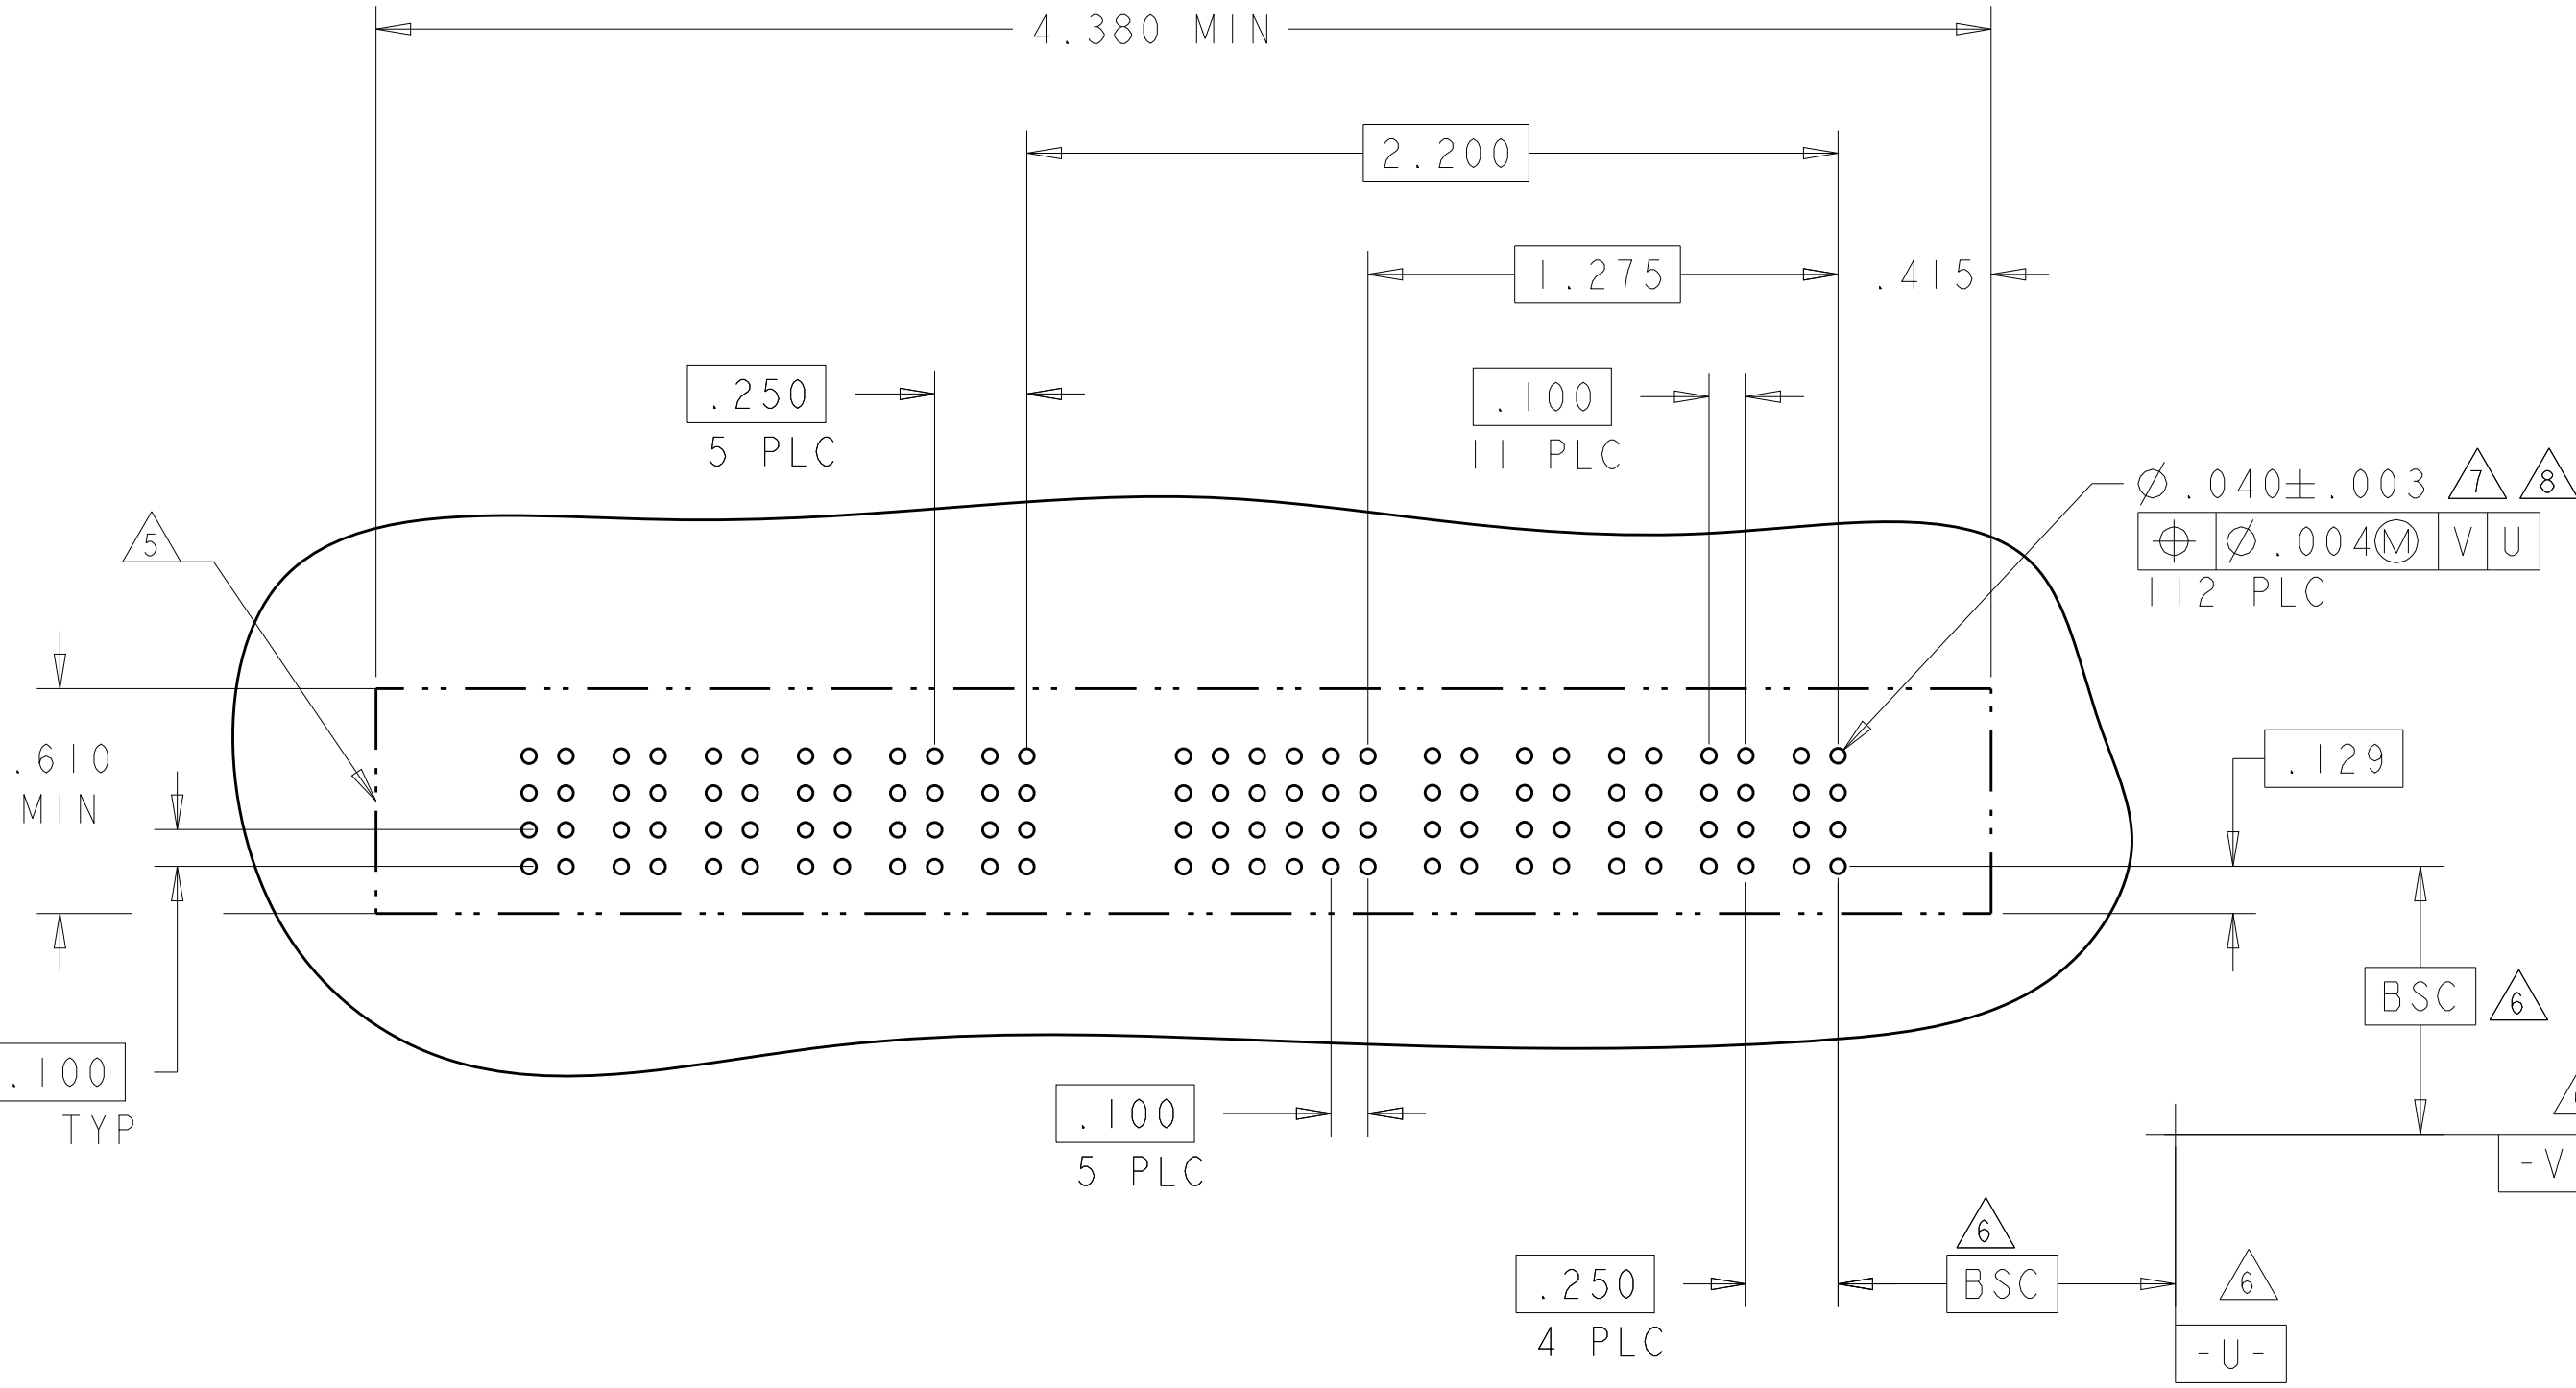

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P4	P3	6	5	4	3	2	1	P2	P1	
2-6450540-5	D C B A	HD			AP	AP	AP	AP	AP	AP			HD
					AP	AP	AP	AP	AP	AP			
					AP	AP	AP	AP	AP	AP			
					AP	AP	AP	AP	AP	AP			
2P + 24S + 2P													

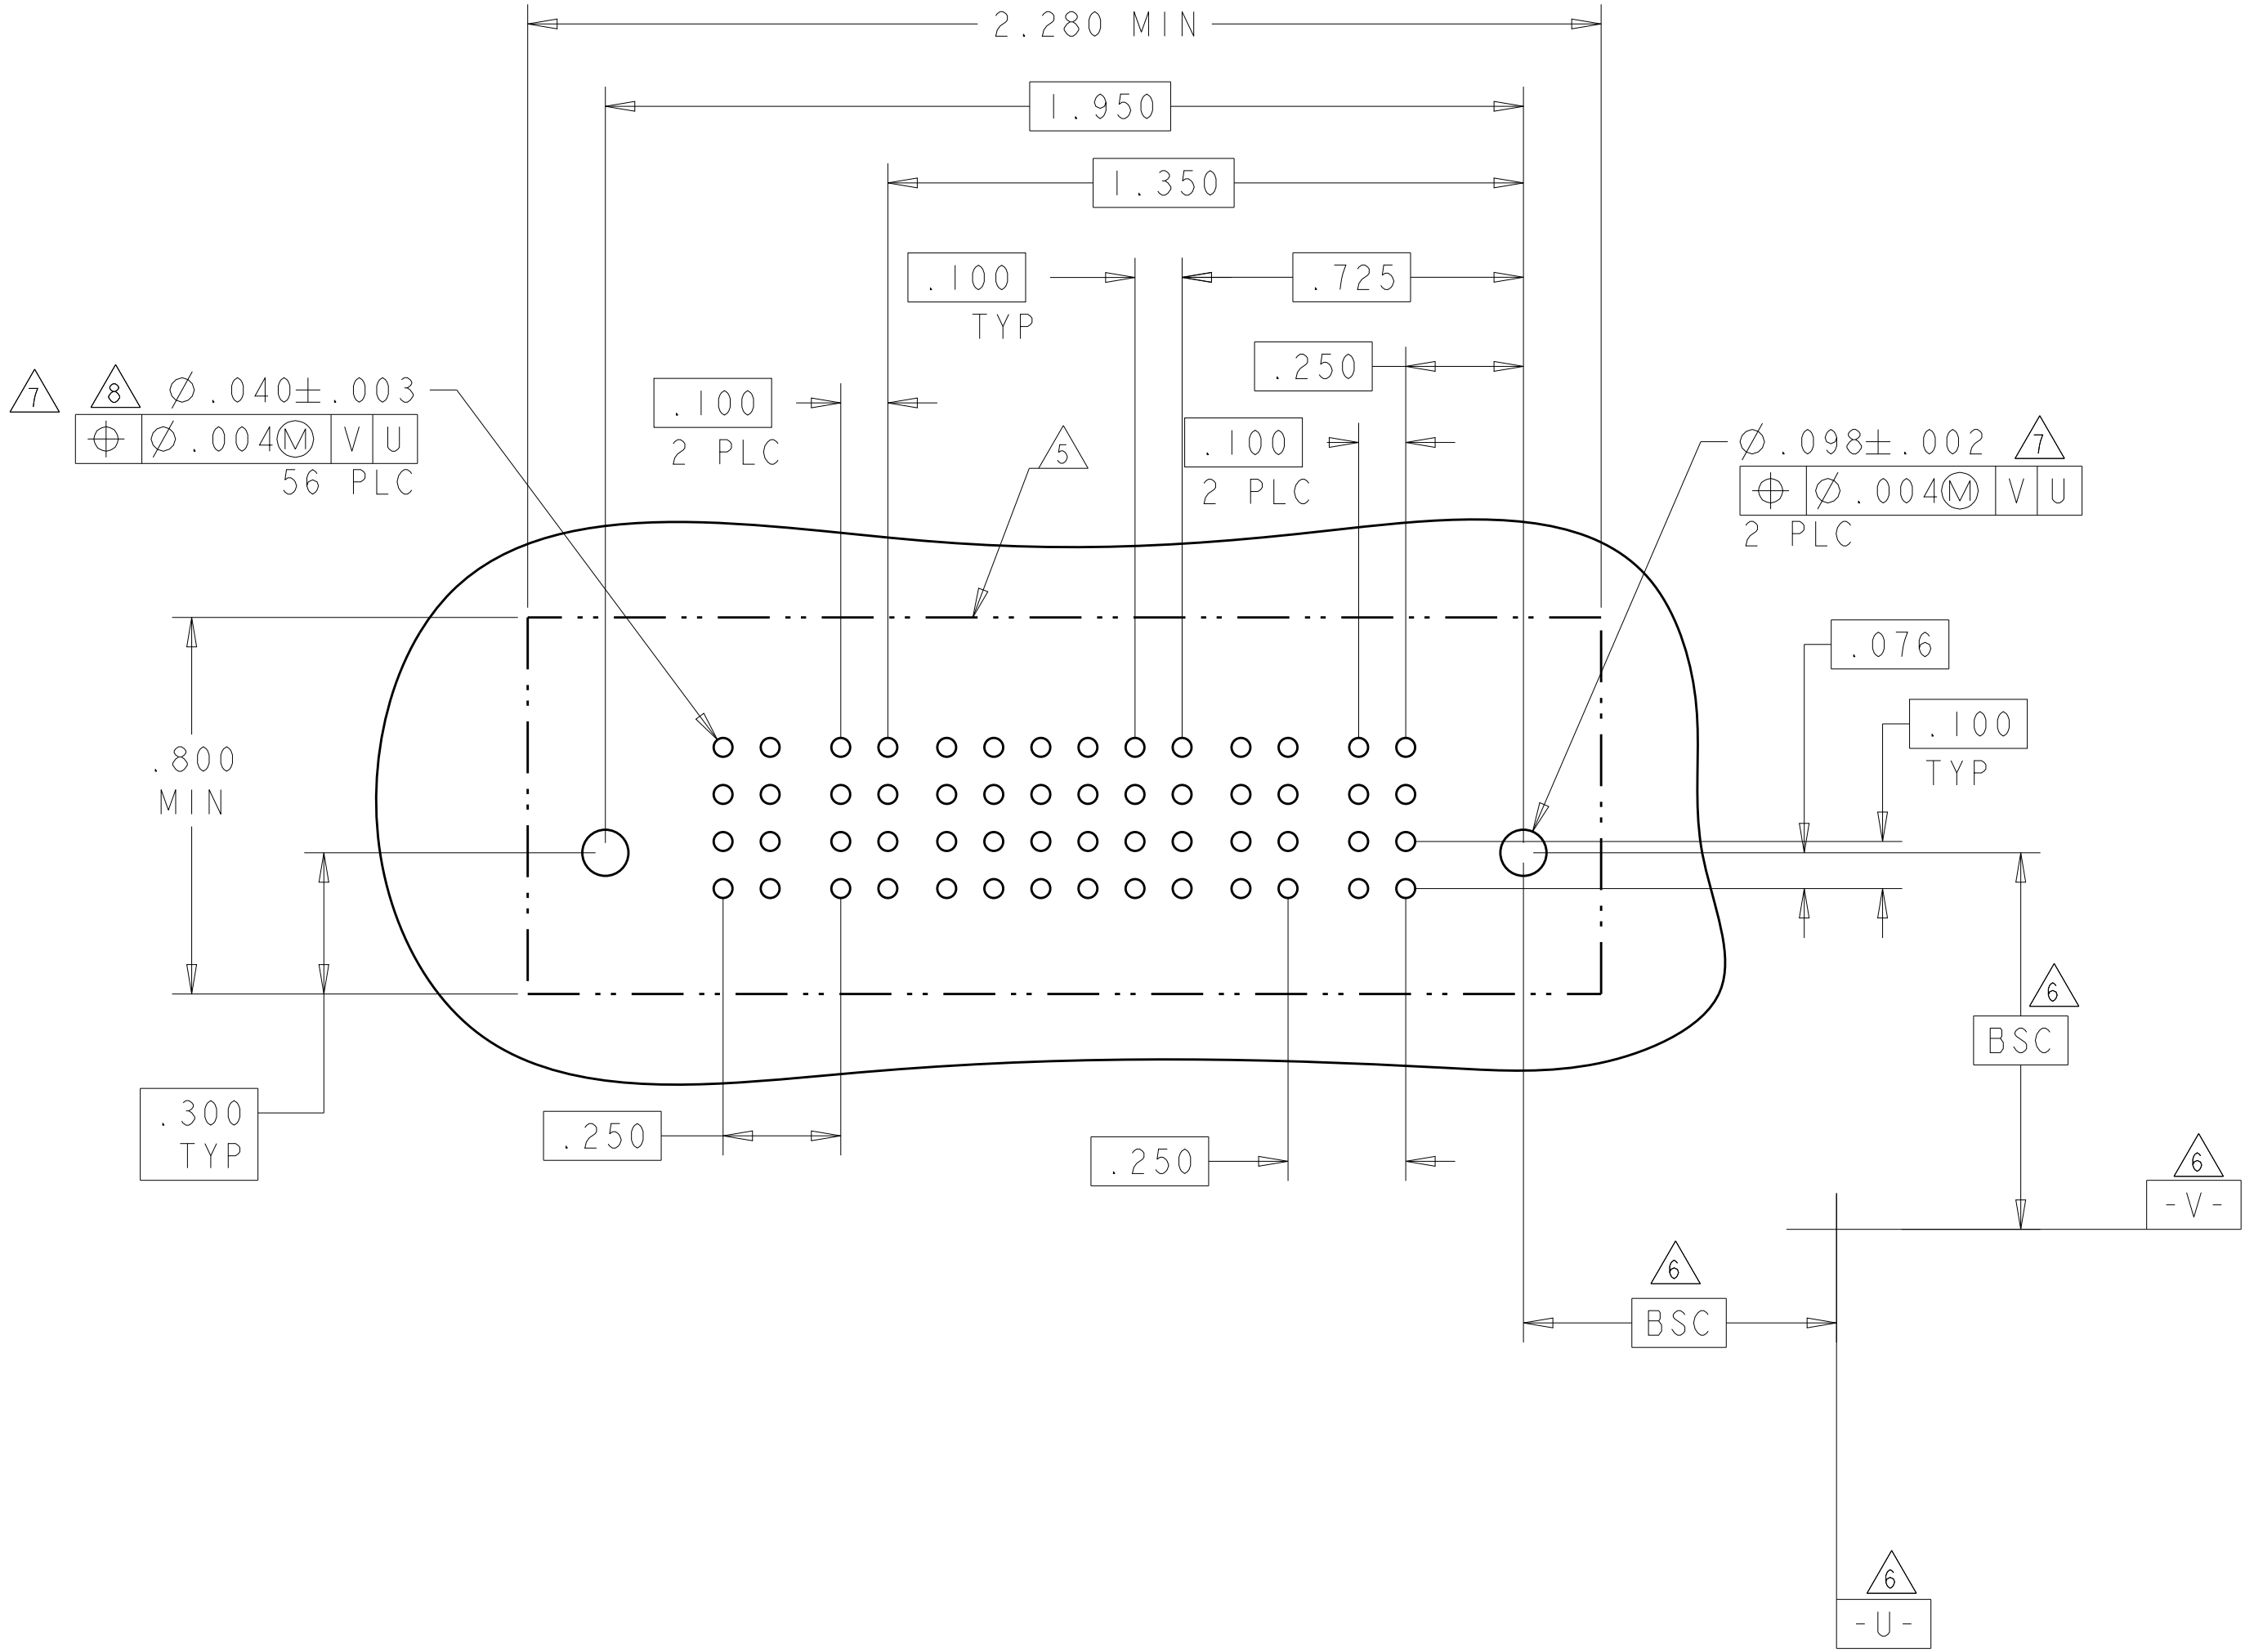

VS	STD POWER PRESSFIT CONTACT .115 LG
VP	MFBL POWER PRESSFIT CONTACT .115 LG
GS	STD POWER PRESSFIT CONTACT .135 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
P	SIGNAL PRESSFIT CONTACT .115 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH

CONTACT TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.GRZYBOWSKI 29APR05
CHK M.PERCHEKKE 29APR05
APVD M.PERCHEKKE

DIMENSIONS:
INCHES

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±2°
FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE CAGE CODE DRAWING NO
A100779C=6450540

RESTRICTED TO
-
REV K9

TE Connectivity

SCALE 2:1 SHEET 3 OF 19

Technical drawing of a mechanical part, showing a top view and a cross-section view.

Top View Dimensions and Features:






- Overall width: 7.780 MIN
- Overall height: .610 MIN
- Central hole pattern: 244 PLC (20 rows by 12 columns)
- Hole diameter: $\varnothing .040 \pm .003$ (7, 8)
- Internal hole diameter: $\varnothing .004 M$ (V, U)
- Feature 5: .100 TYP
- Feature 9: .250 9 PLC
- Feature 20: .100 20 PLC
- Feature 20: .100 20 PLC
- Feature 244: .040 ± .003 244 PLC










Cross-section View Dimensions and Features:



- Feature 6: .129
- Feature 6: BSC (Basic)
- Feature 6: -V- (6)
- Feature 6: -U- (6)
- Feature 9: .250 9 PLC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05 CHN M. PERCHERKE 29APR05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A 100779	
MATERIAL FINISH		WEIGHT -		DRAWING NO C-6450540	
CUSTOMER DRAWING				SCALE 2:1 SHEET 4 of 19 REV K9	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

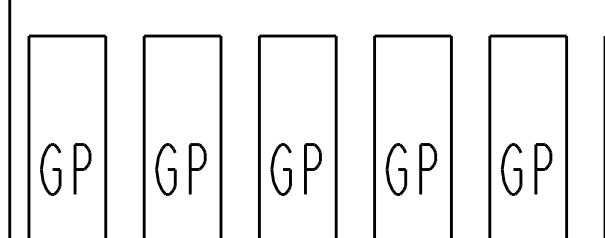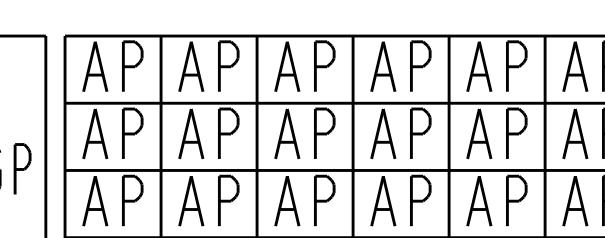PART NUMBER	ROWS		POWER						SIGNAL						POWER				
			P10	P9	P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
6450540-4	D C B A																		
4P + 24S + 6P																			

PART NUMBER	ROWS		POWER					SIGNAL			POWER					
			P10	P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1	
6450540-5	D C B A															
5P + 12S + 5P																

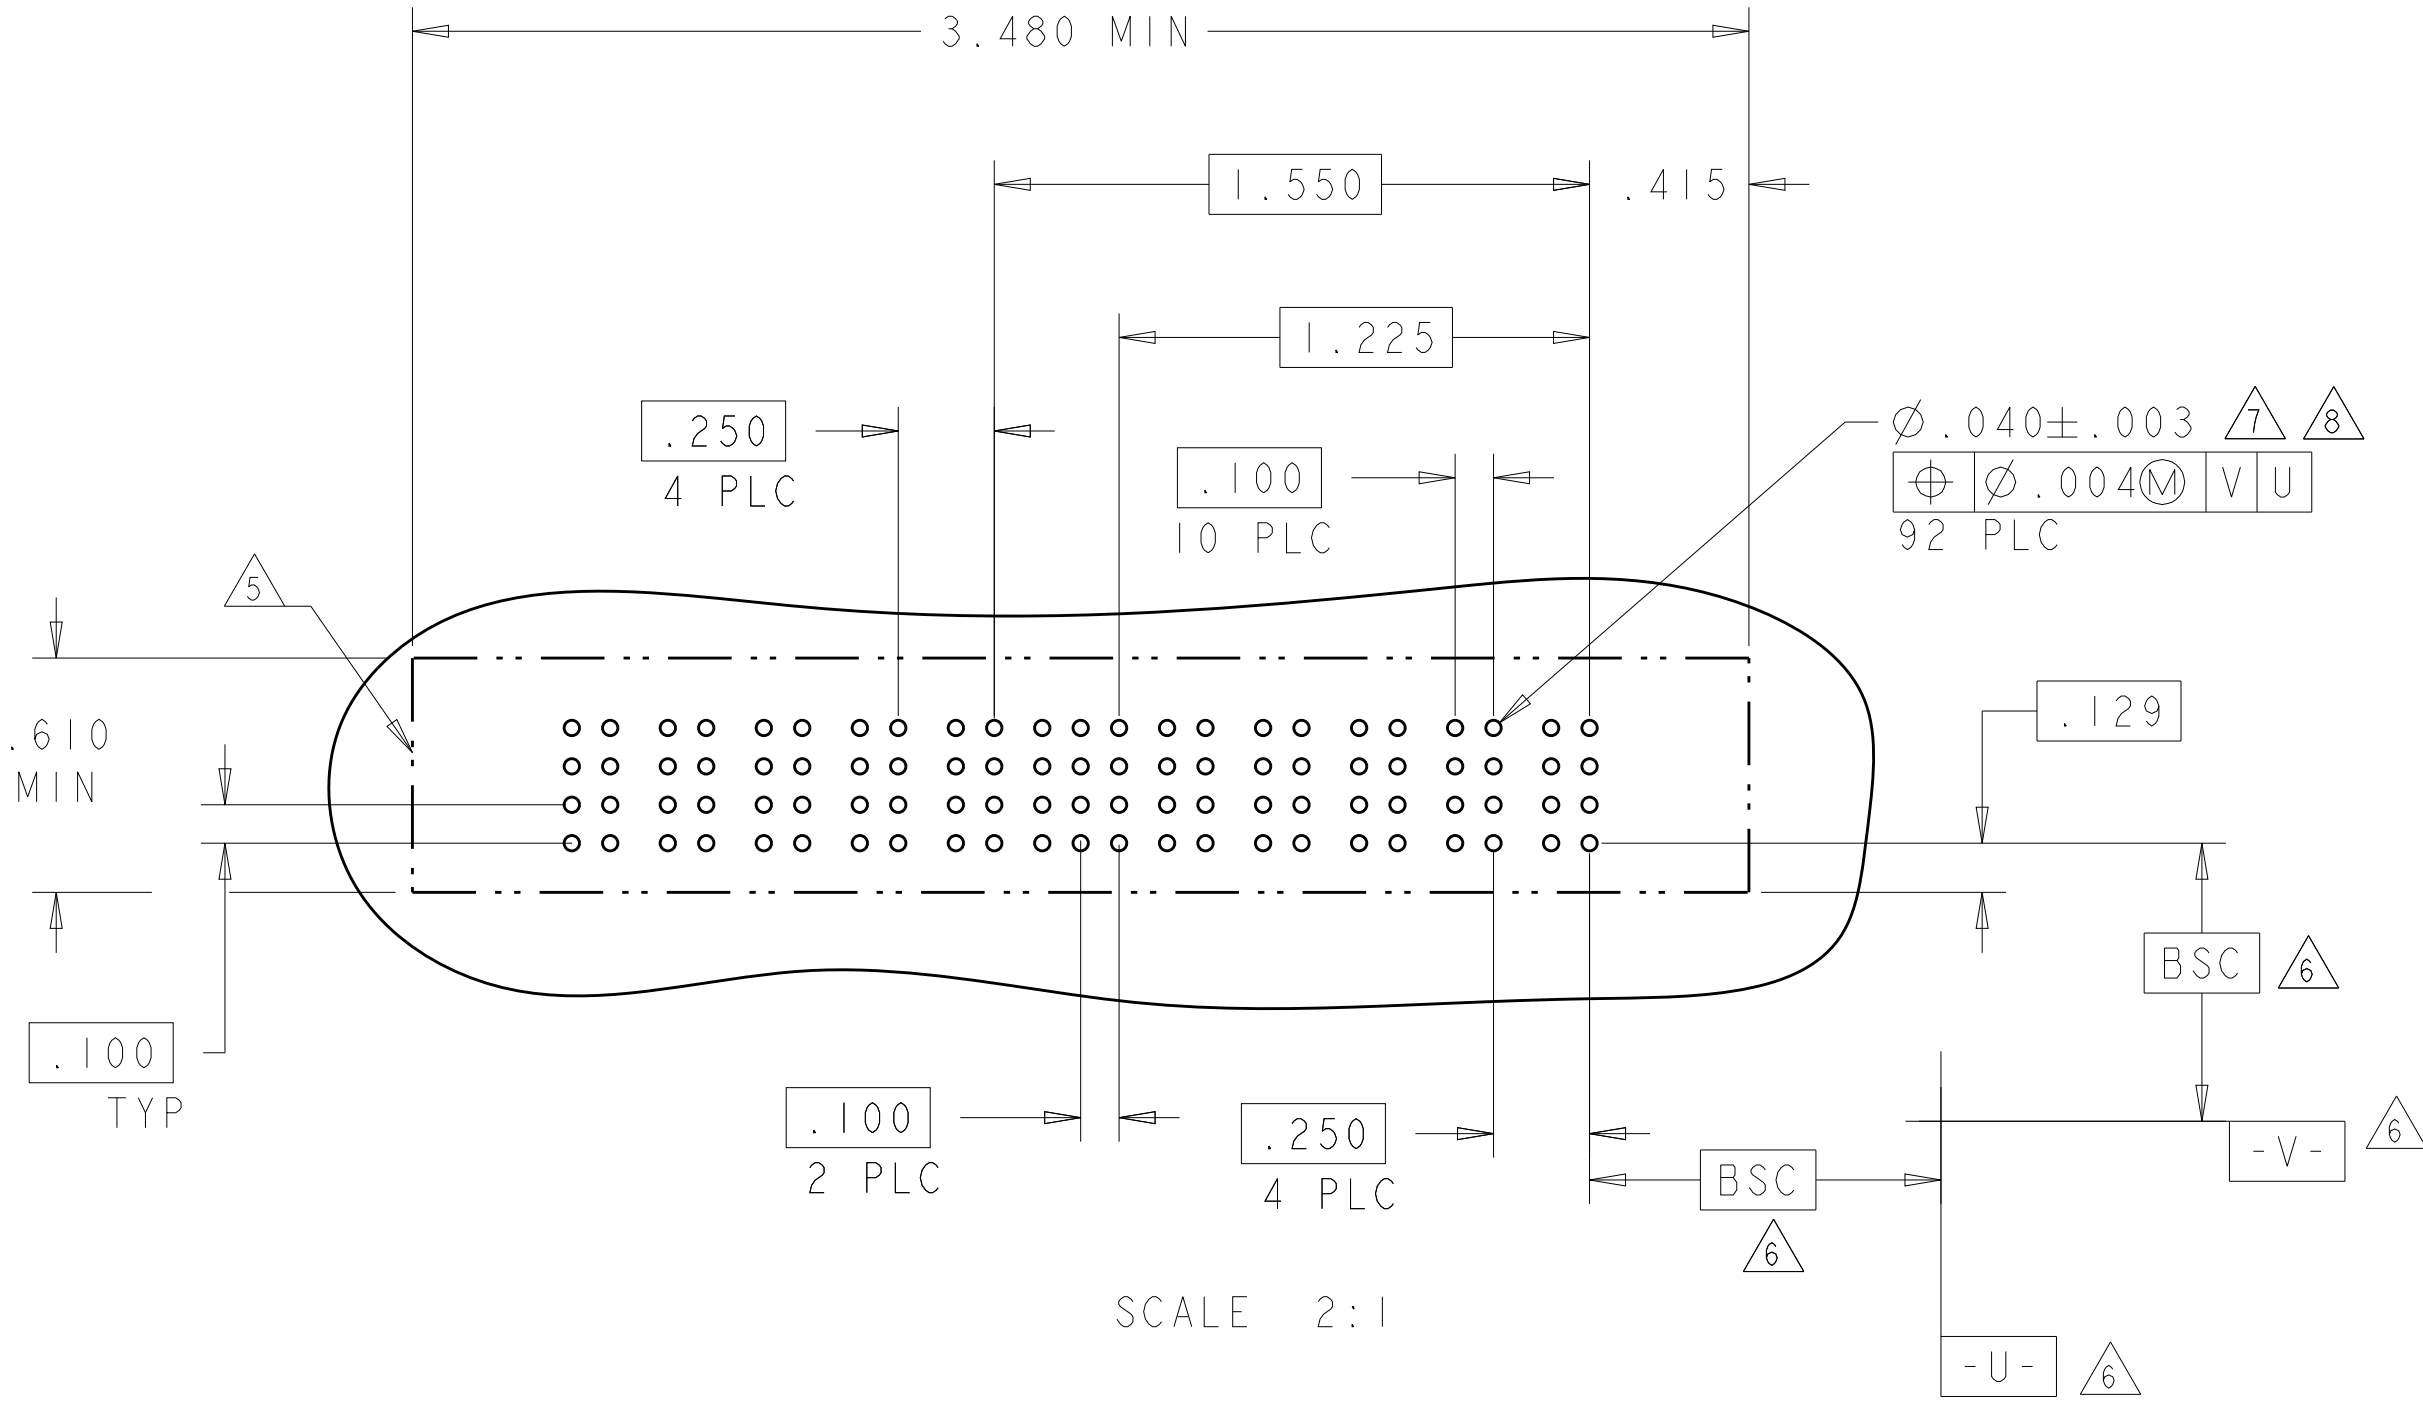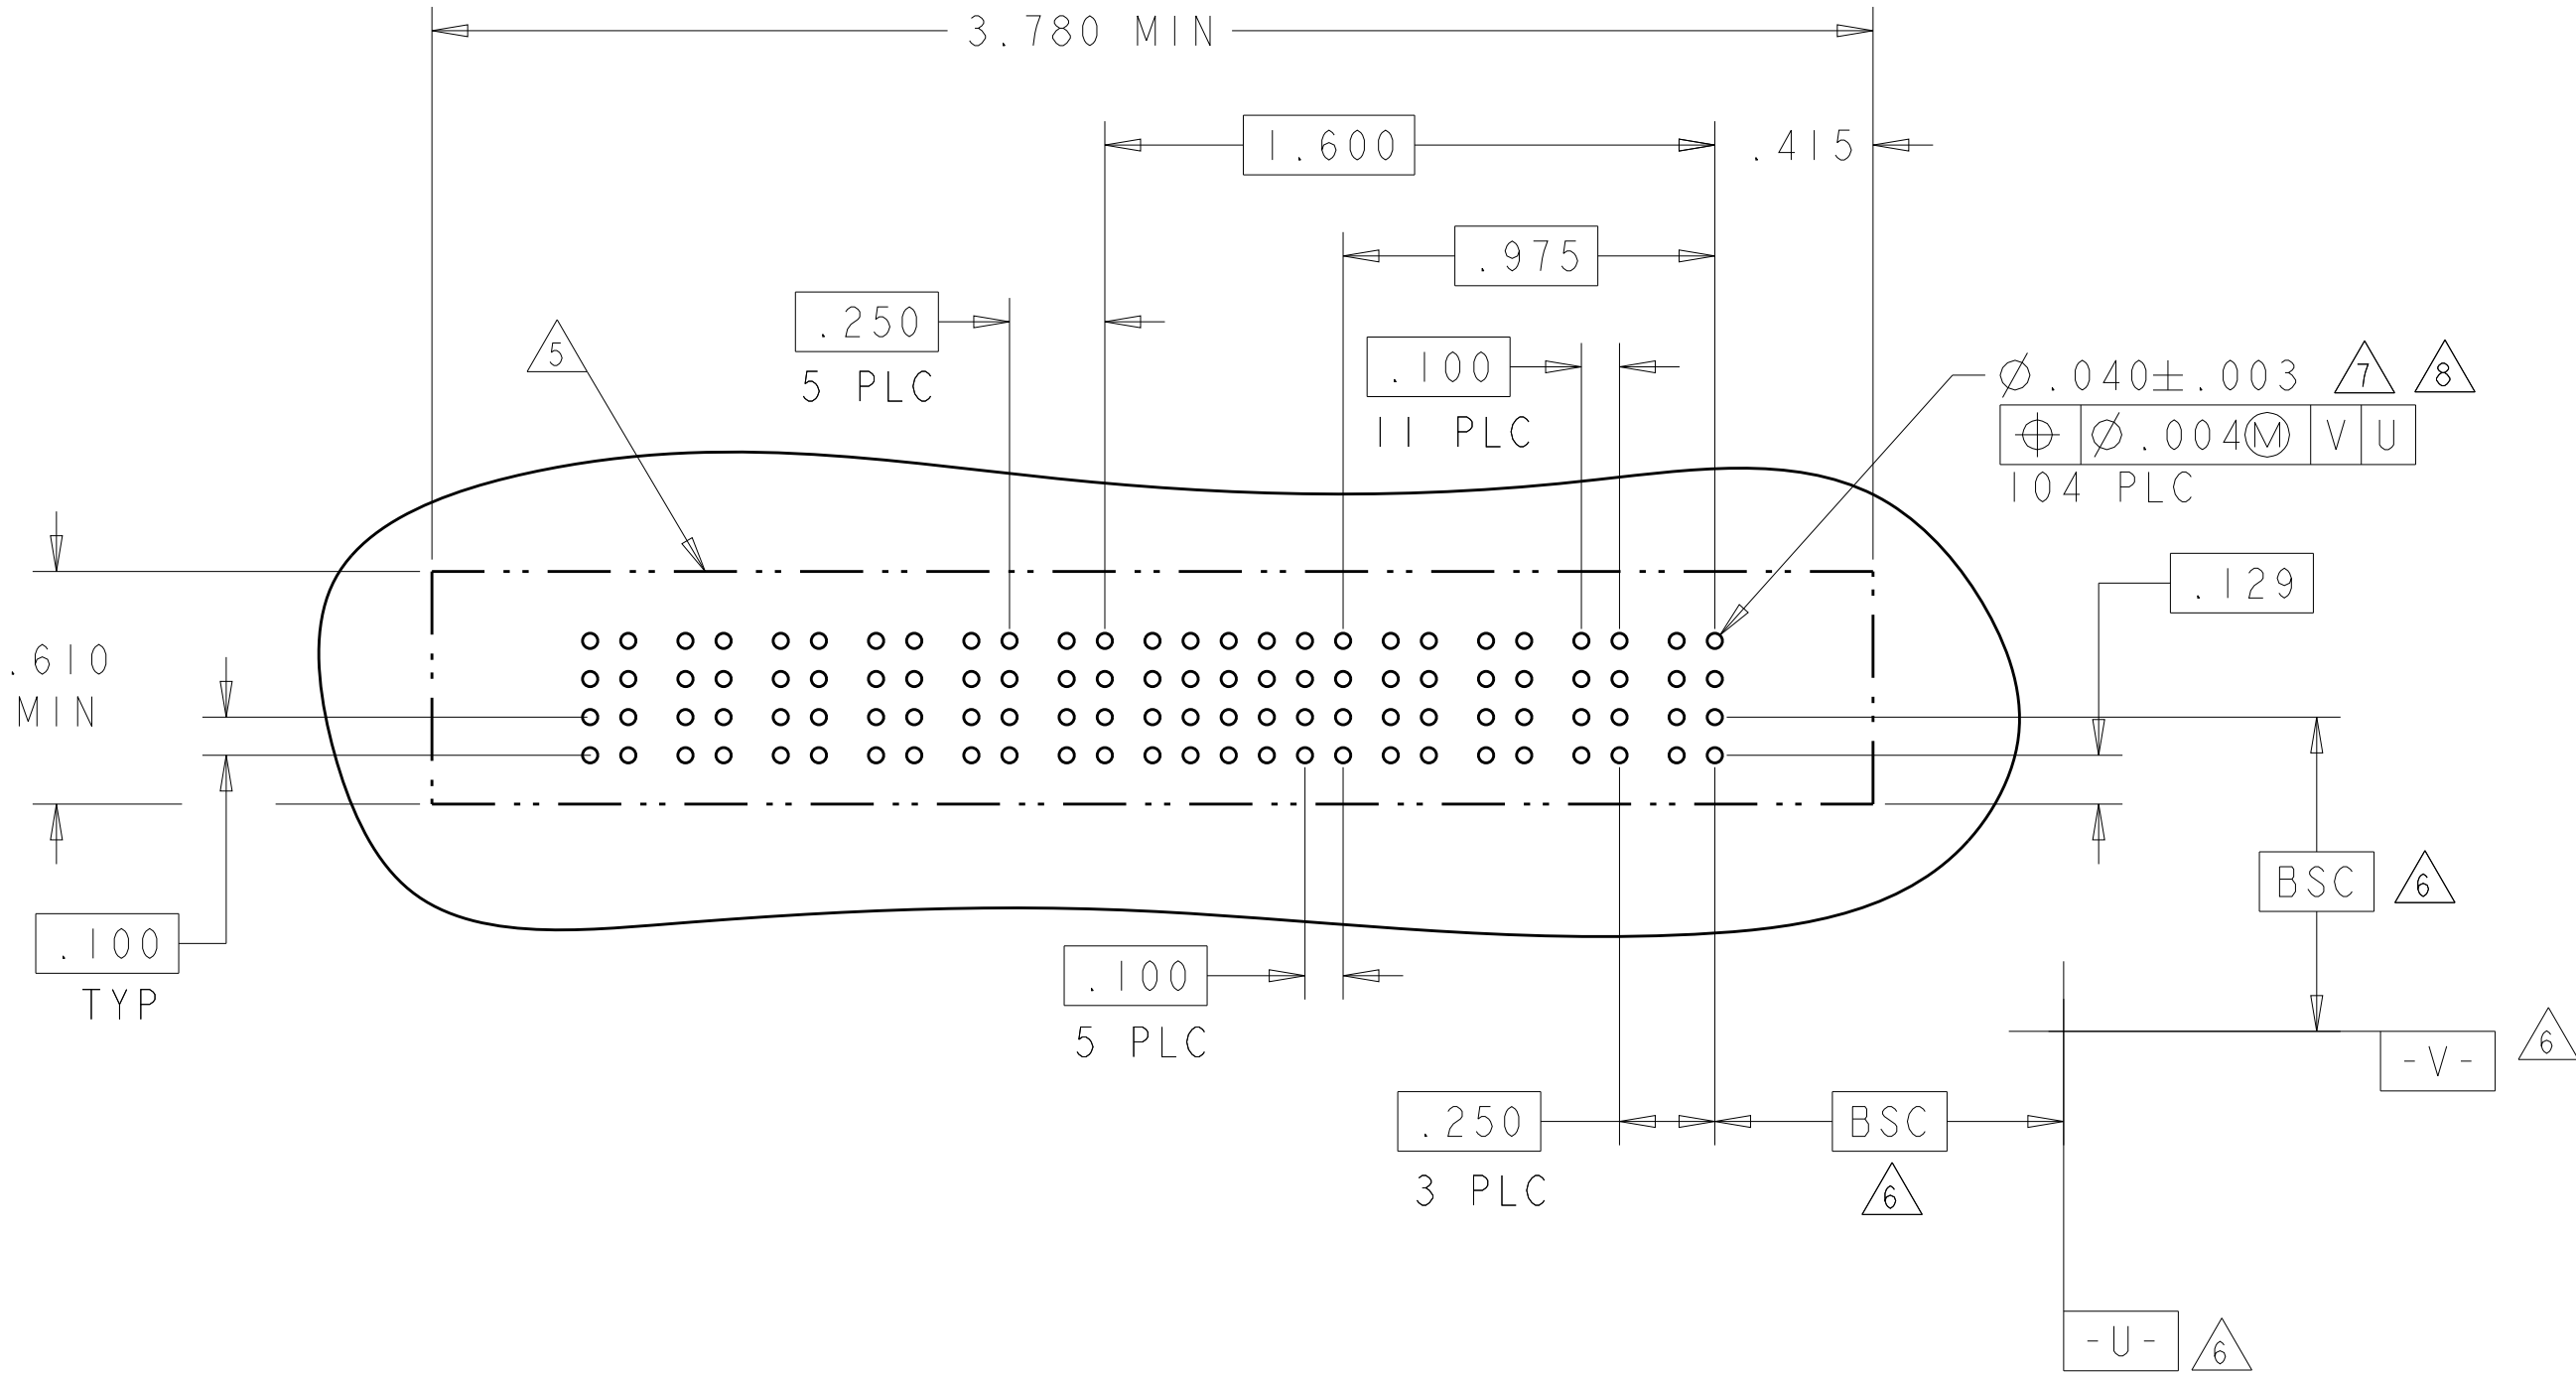


GP	MFBL POWER PRESSFIT CONTACT .135 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH
CONTACT TABLE	


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	29APR05 29APR05 -
DIMENSIONS: INCHES		PRODUCT SPEC	NAME
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE
0 PLC ±.01		114-13038	CAGE CODE
1 PLC ±.01		WEIGHT	DRAWING NO
2 PLC ±.01		CUSTOMER DRAWING	RESTRICTED TO
3 PLC ±.005		SCALE	SHEET
4 PLC ±.0020		2:1	5 OF 19
ANGLES ±.0020		REV	K9
FINISH			

TE TE Connectivity

VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL


A100779C=6450540

PART NUMBER	ROWS		POWER	SIGNAL							POWER	
			P2	6	5	4	3	2	1	P1		
6450540-7	D C B A			AP	AP	AP	AP	AP	AP	AP		
			IP + 24S + IP									

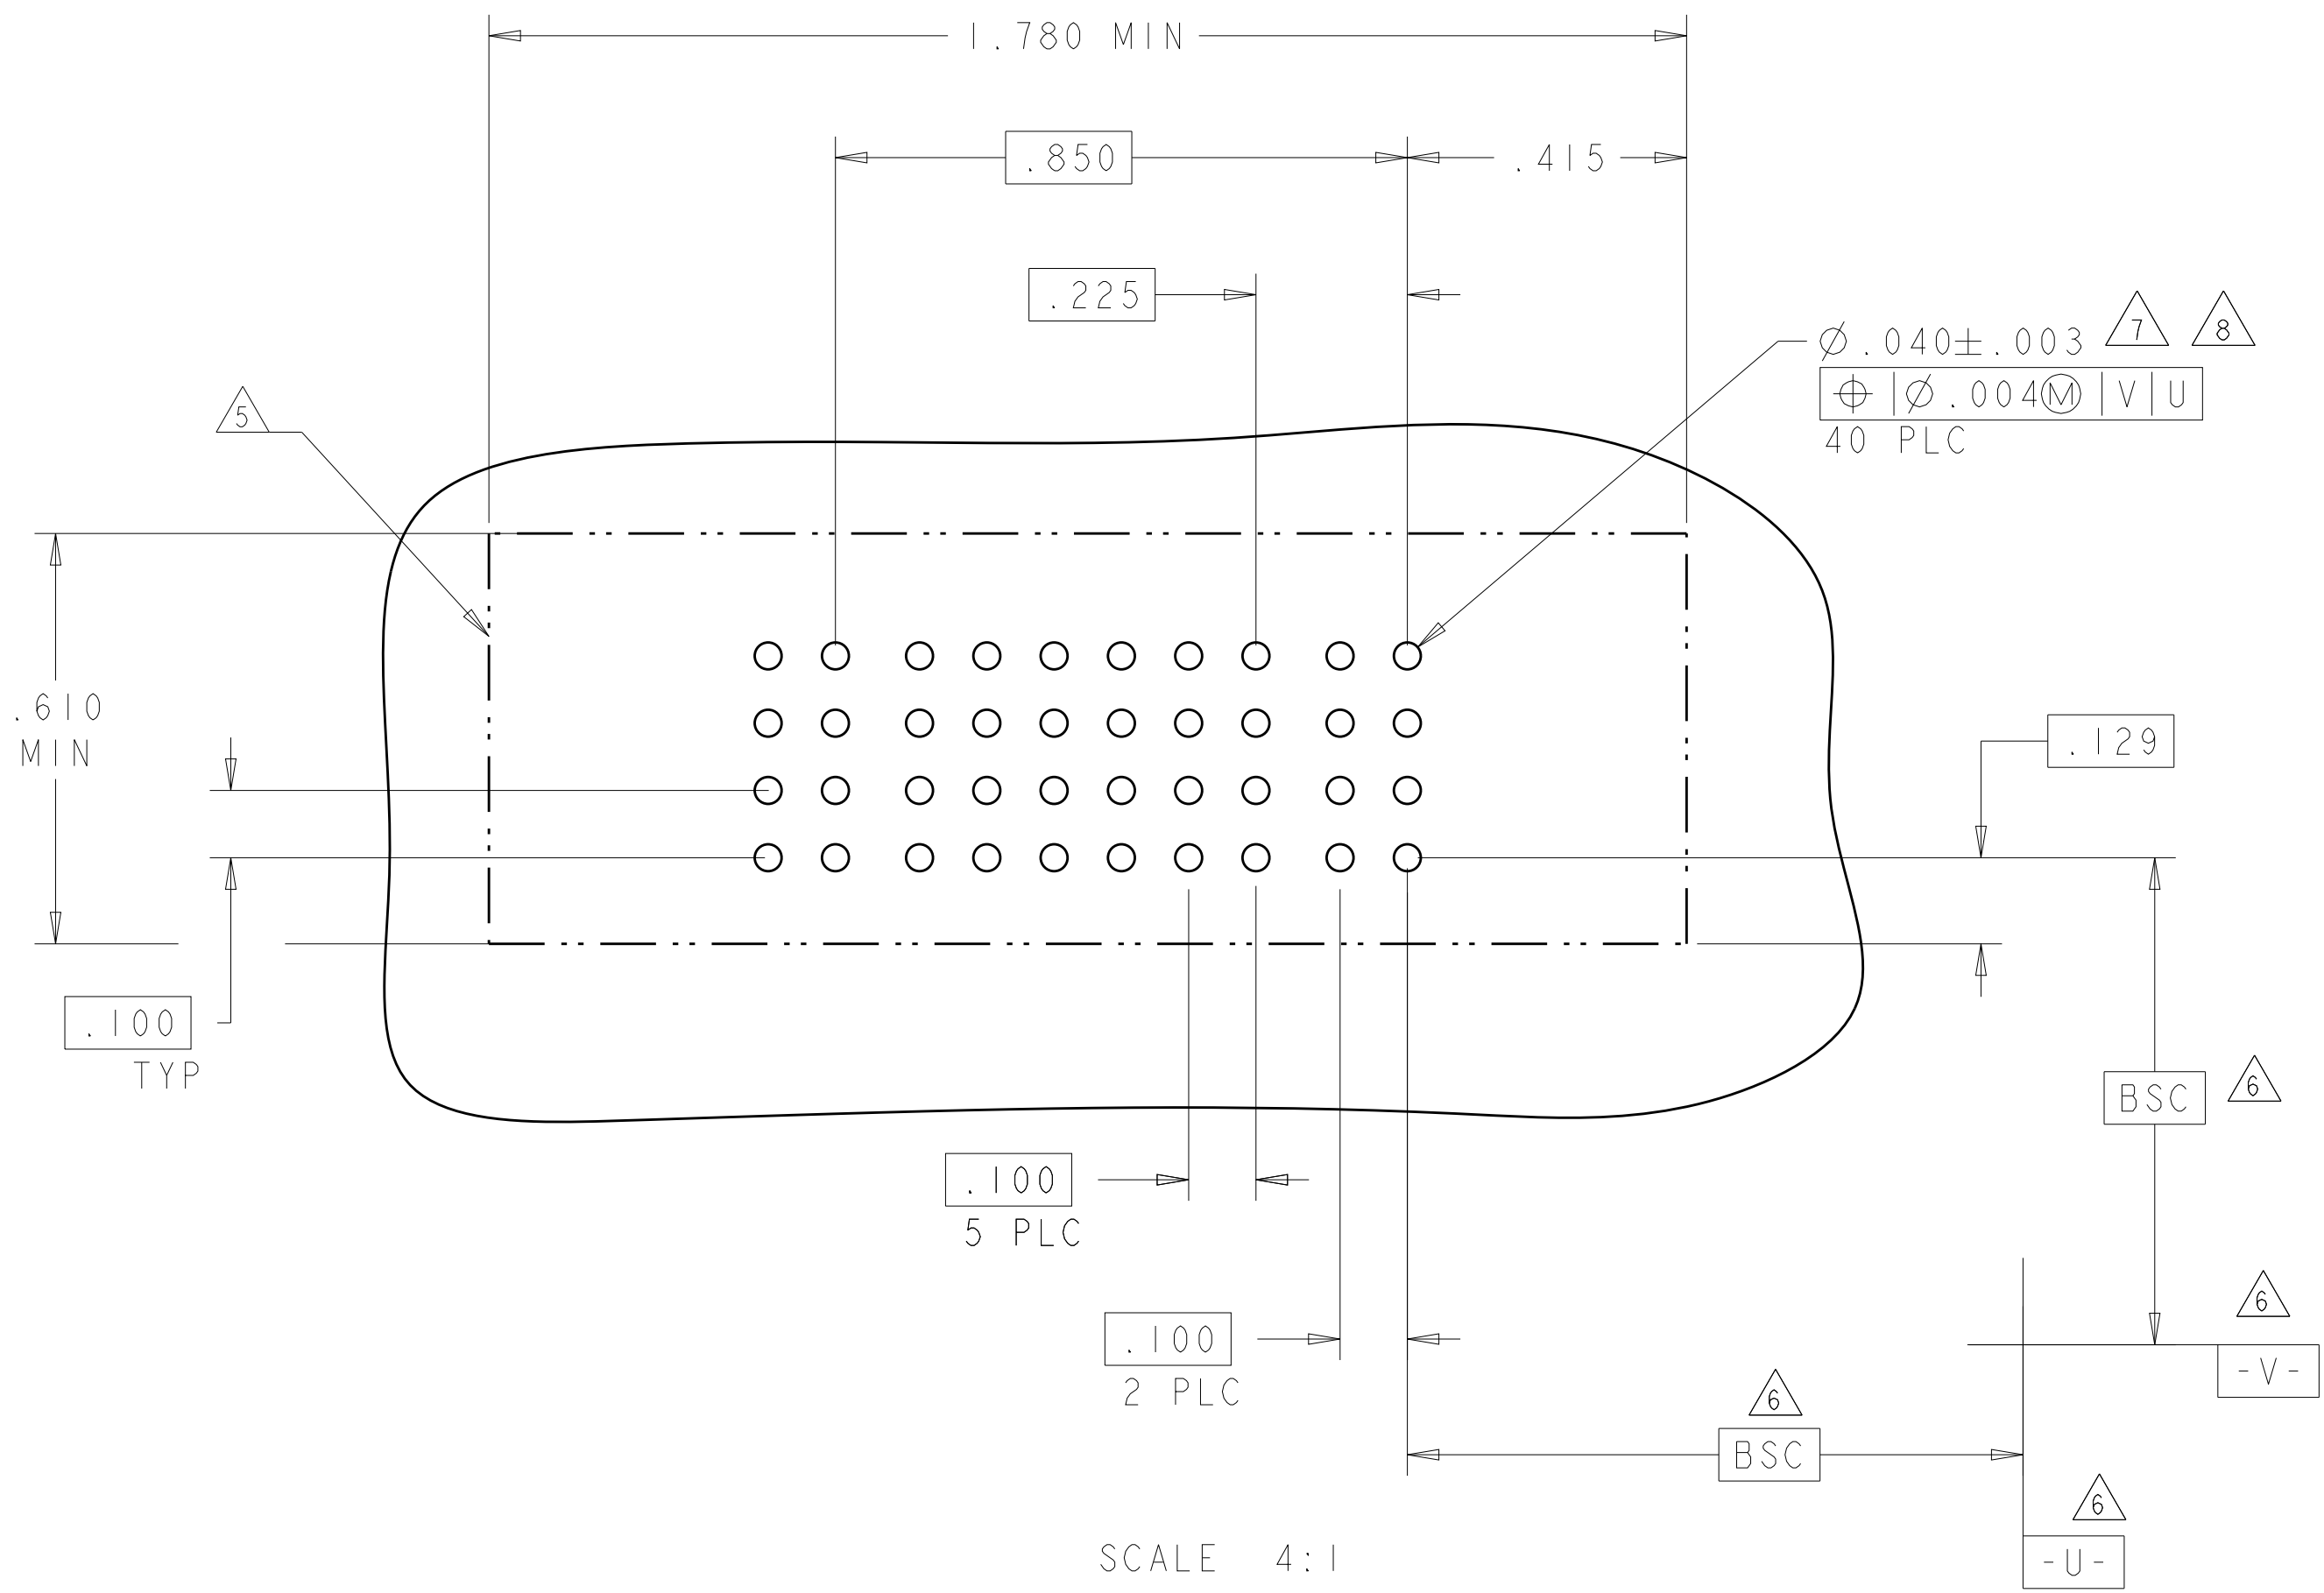
4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER						SIGNAL					POWER						
			PI2	PI1	PI0	P9	P8	P7	5	4	3	2	1	P6	P5	P4	P3	P2	PI	
1-6450540-2	D C B A	HD	GP GP GP GP GP GP	AP AP AP AP AP AP	AP AP AP AP AP AP	AP AP AP AP AP AP	AP AP AP AP AP AP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP			

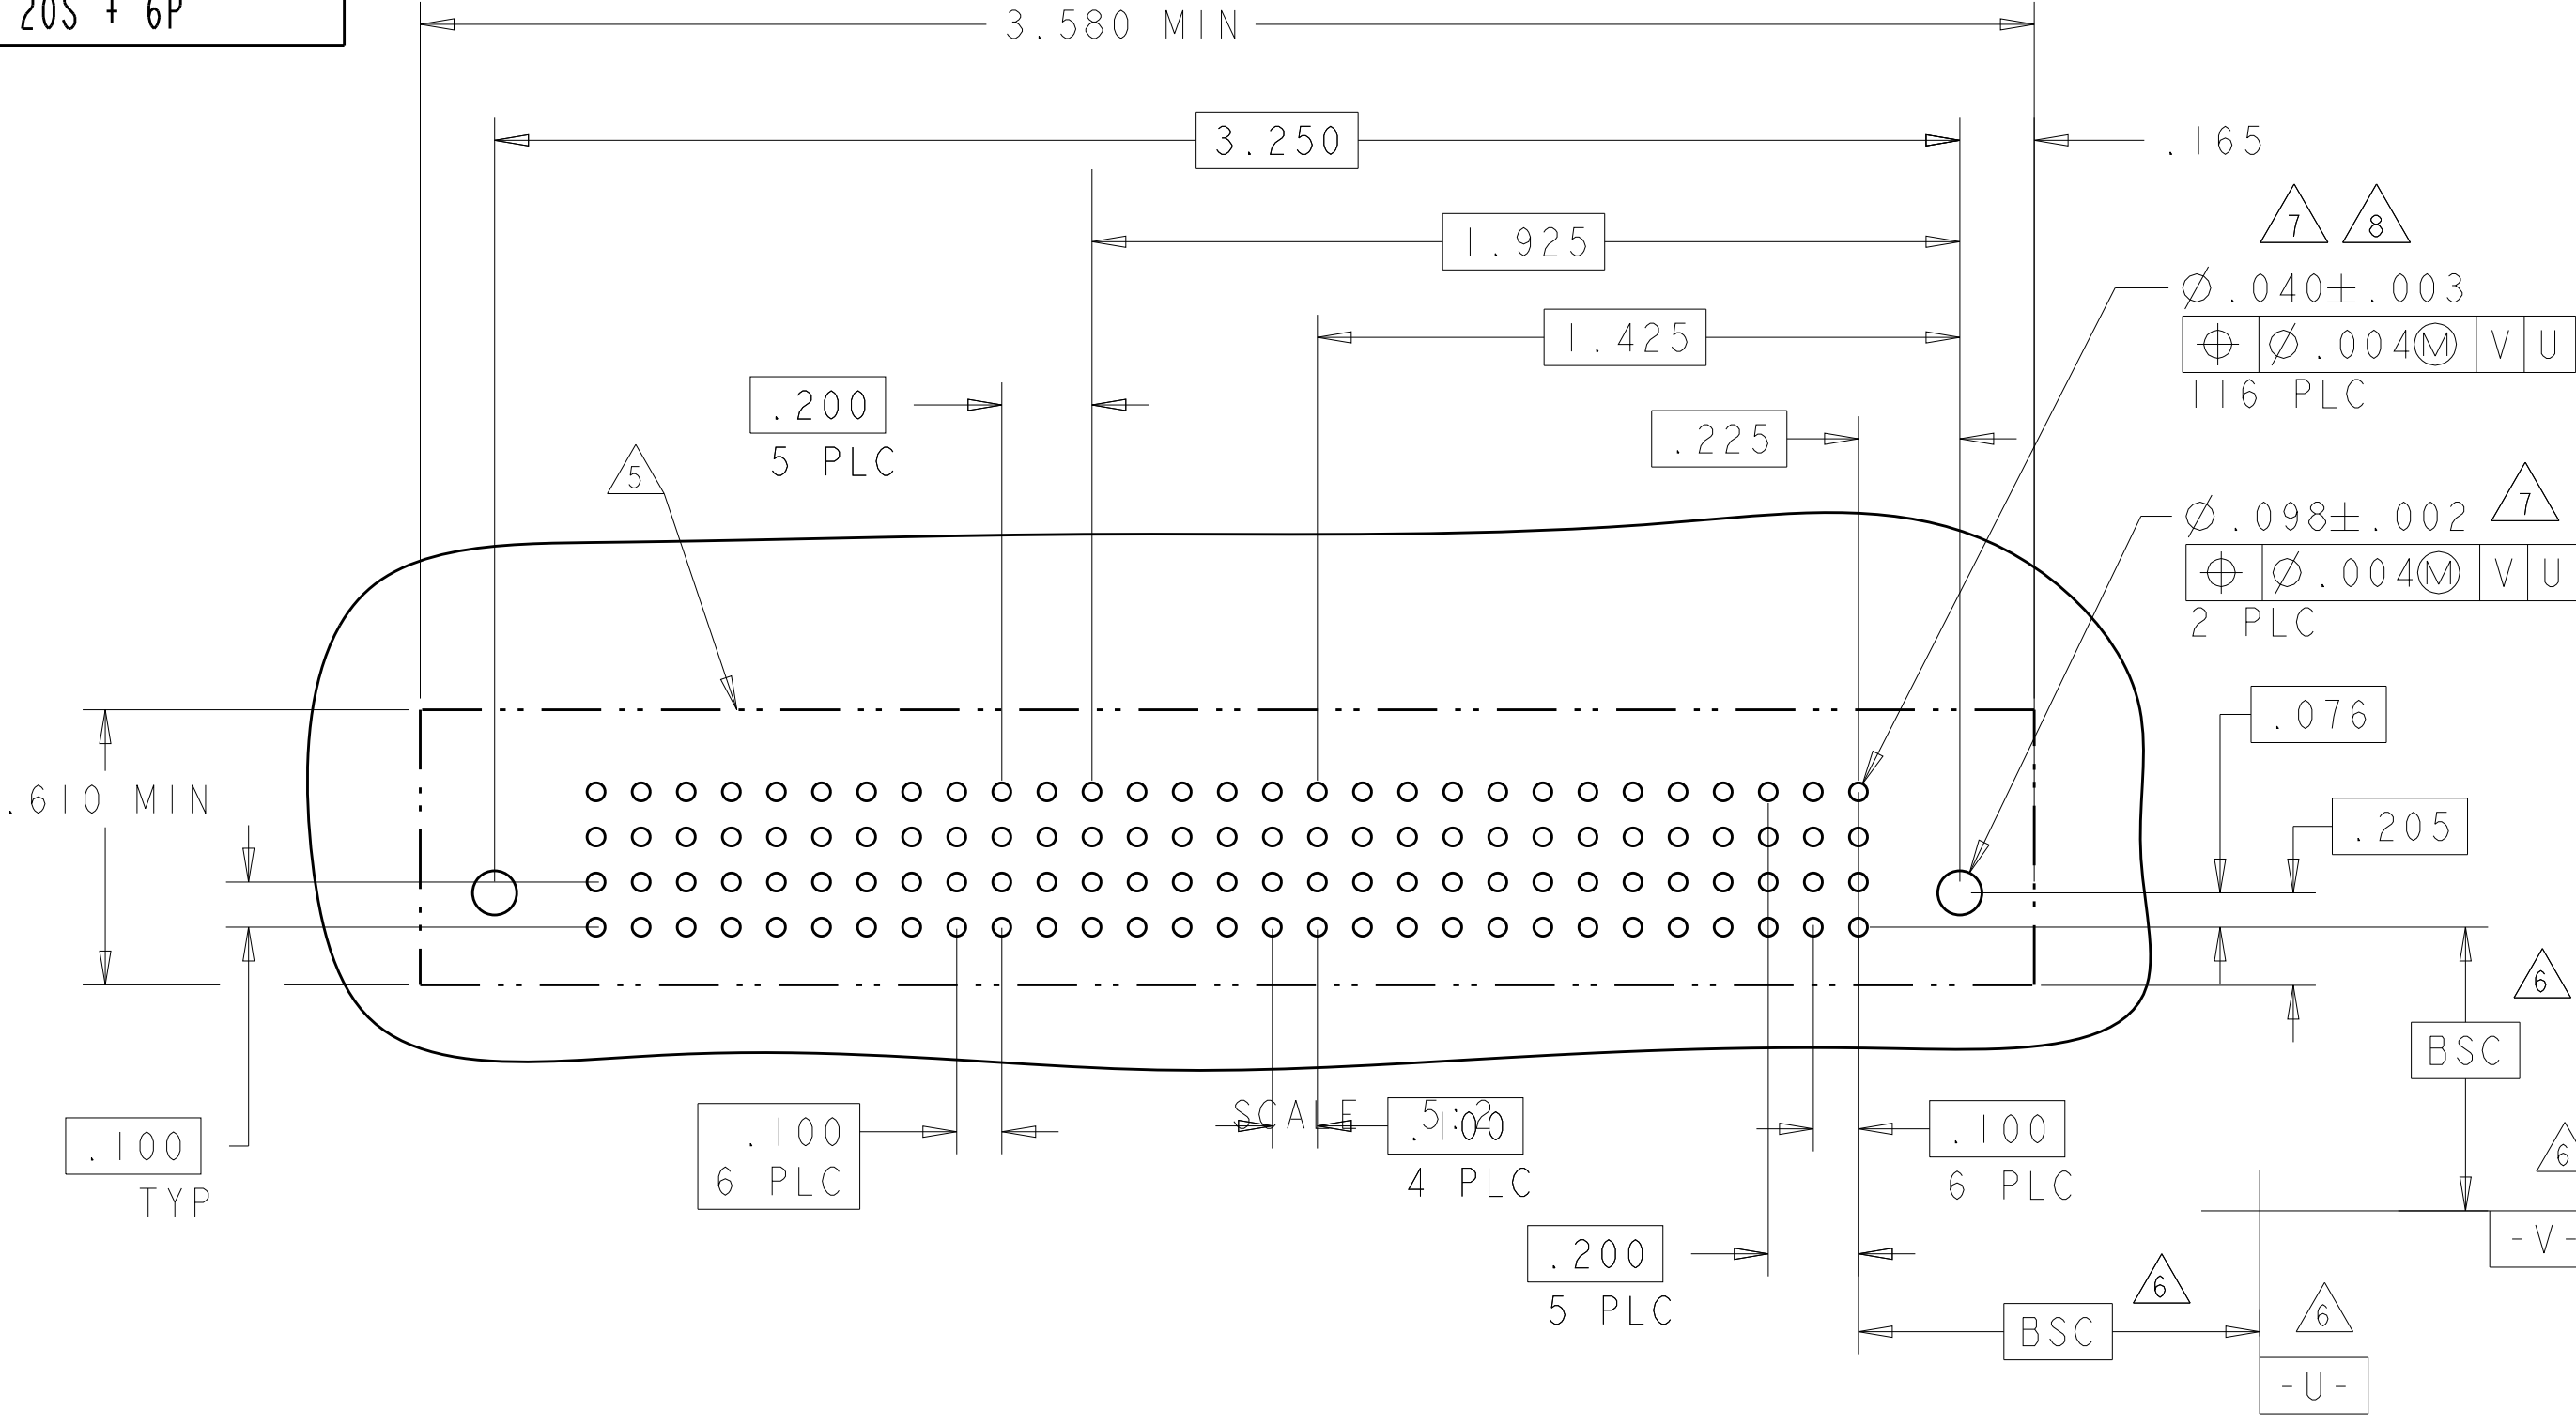

PART NUMBER	ROWS		POWER											SIGNAL						POWER										
			P22	P21	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2	
1-6450540-4	D C B A		GP GP GP GP GP GP GP GP GP GP GP GP GP AP AP AP AP AP AP GP GP GP GP GP GP GP GP GP GP GP	AP AP AP AP AP AP	GP GP GP GP GP GP GP GP GP																									
				AP AP AP AP AP AP																										
				AP AP AP AP AP AP																										
				AP AP AP AP AP AP																										

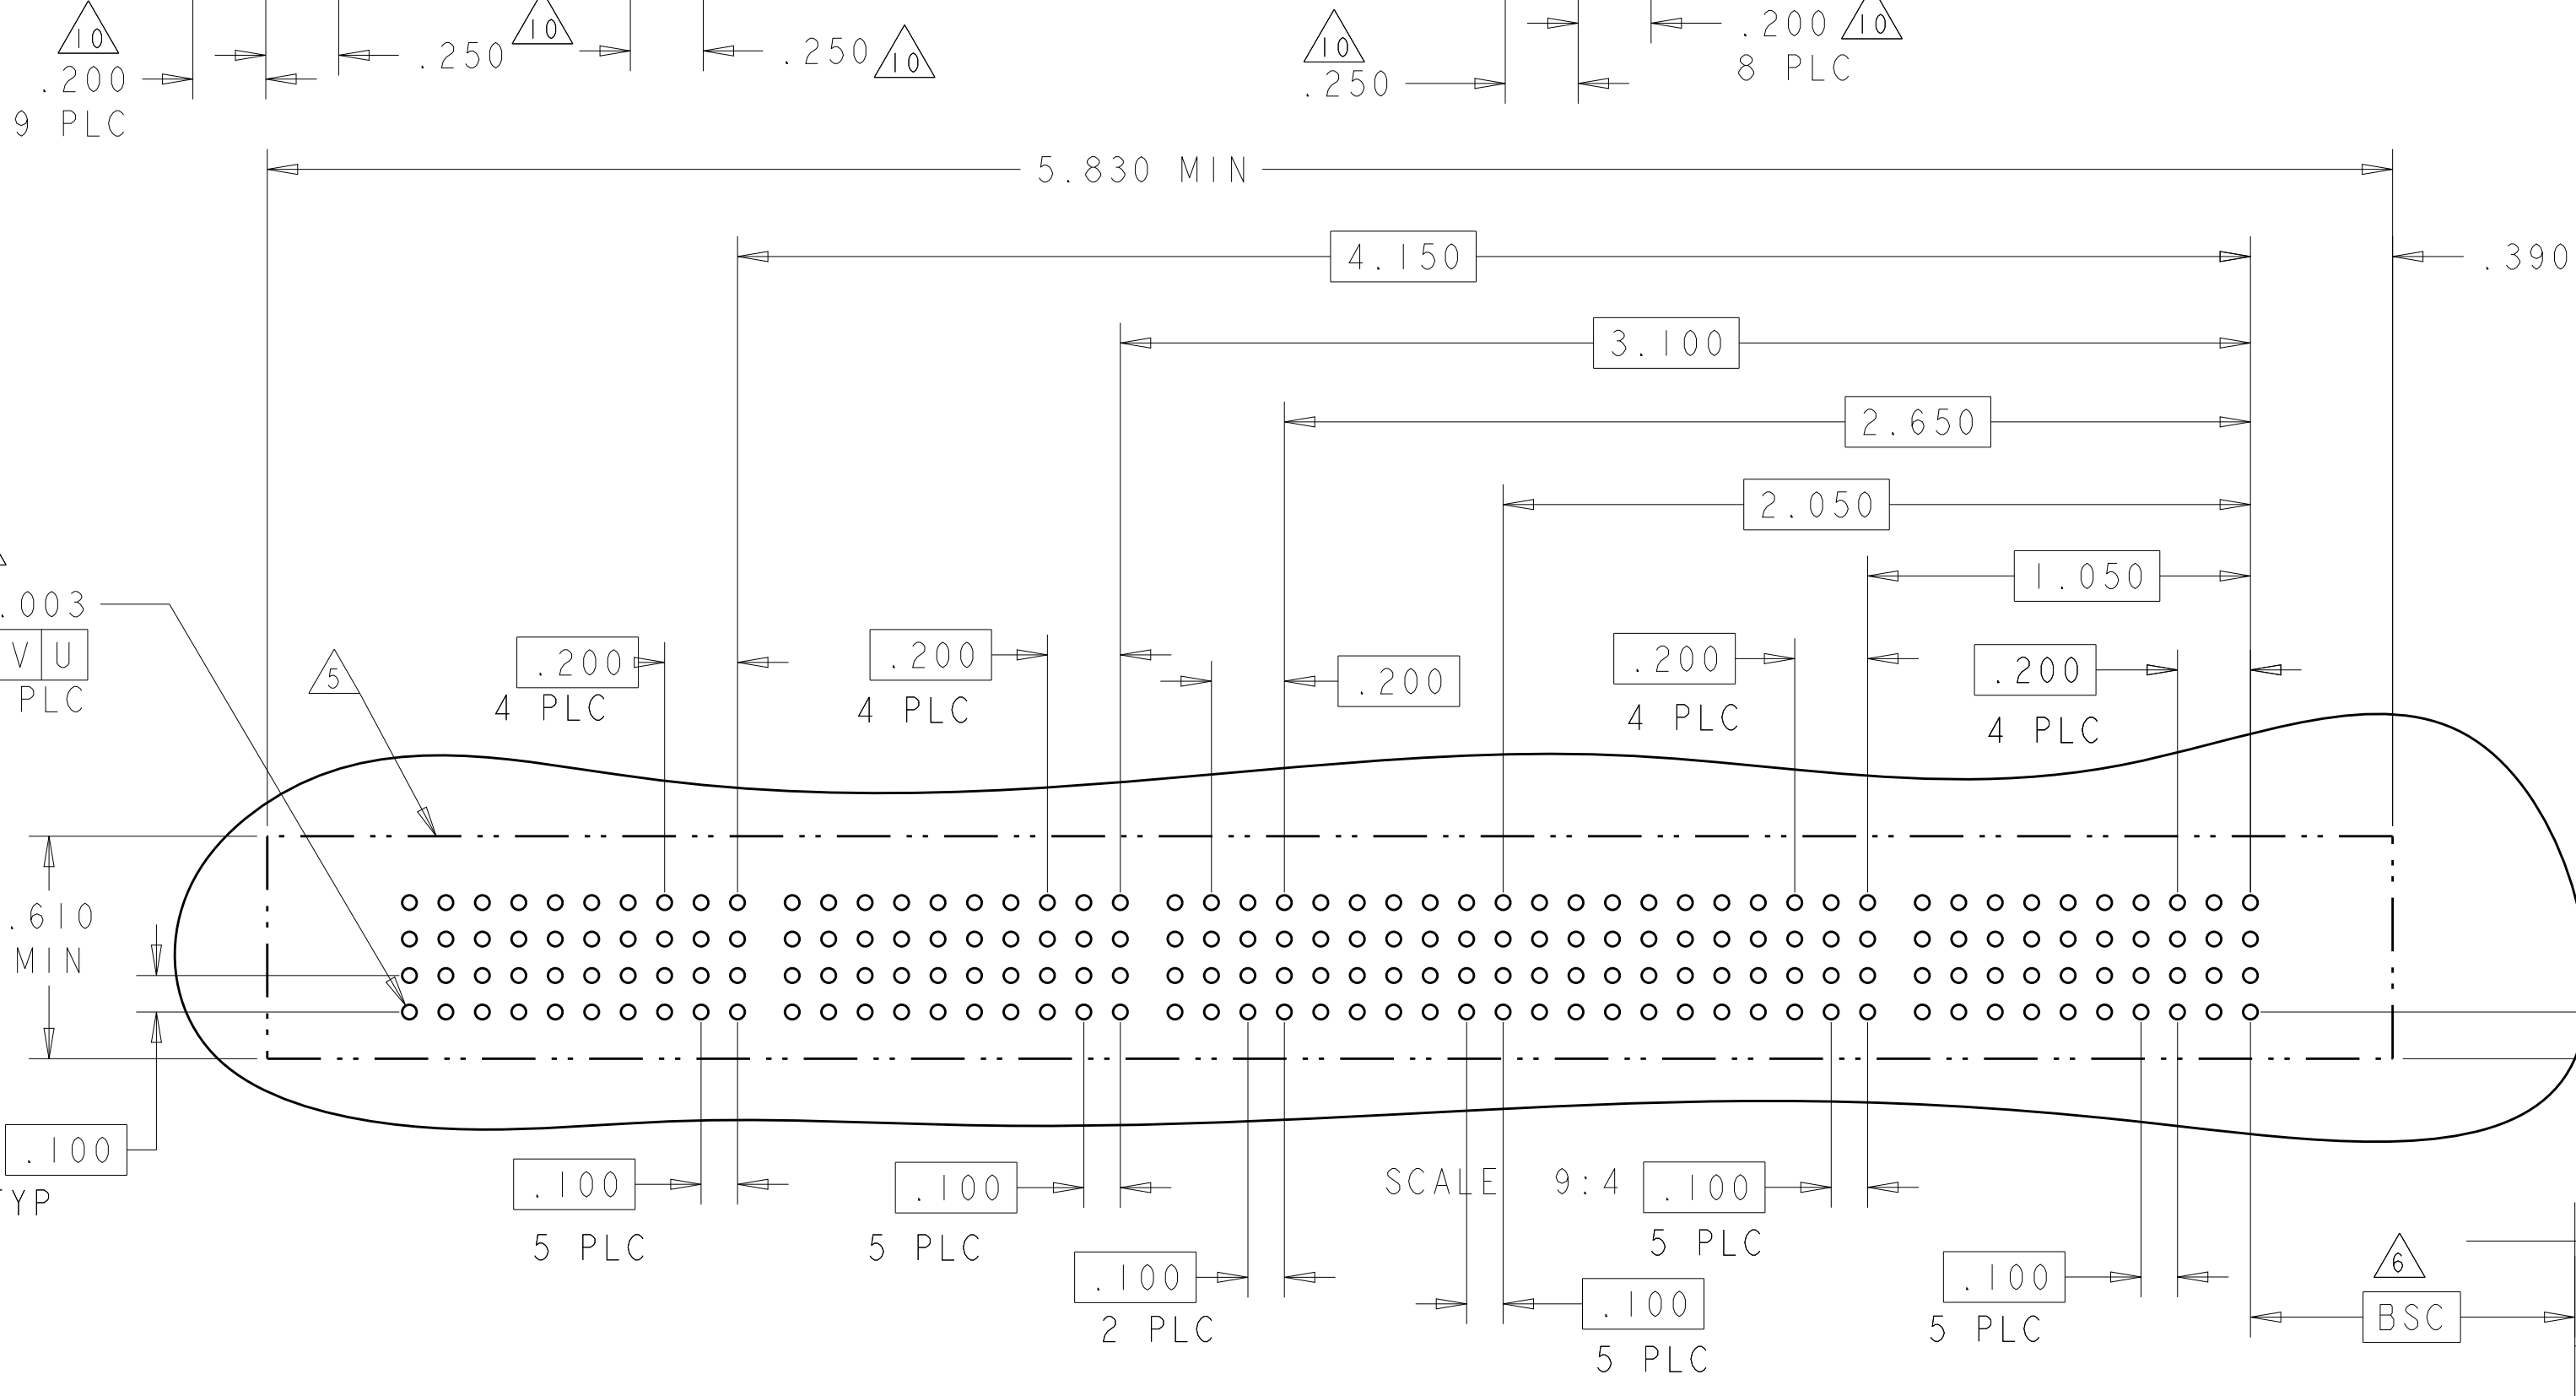

PART NUMBER	ROWS		POWER			SIGNAL						POWER																																																																																																																																																																																										
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1																																																																																																																																																																																								
2-6450540-0	D C B A																																																																																																																																																																																																					

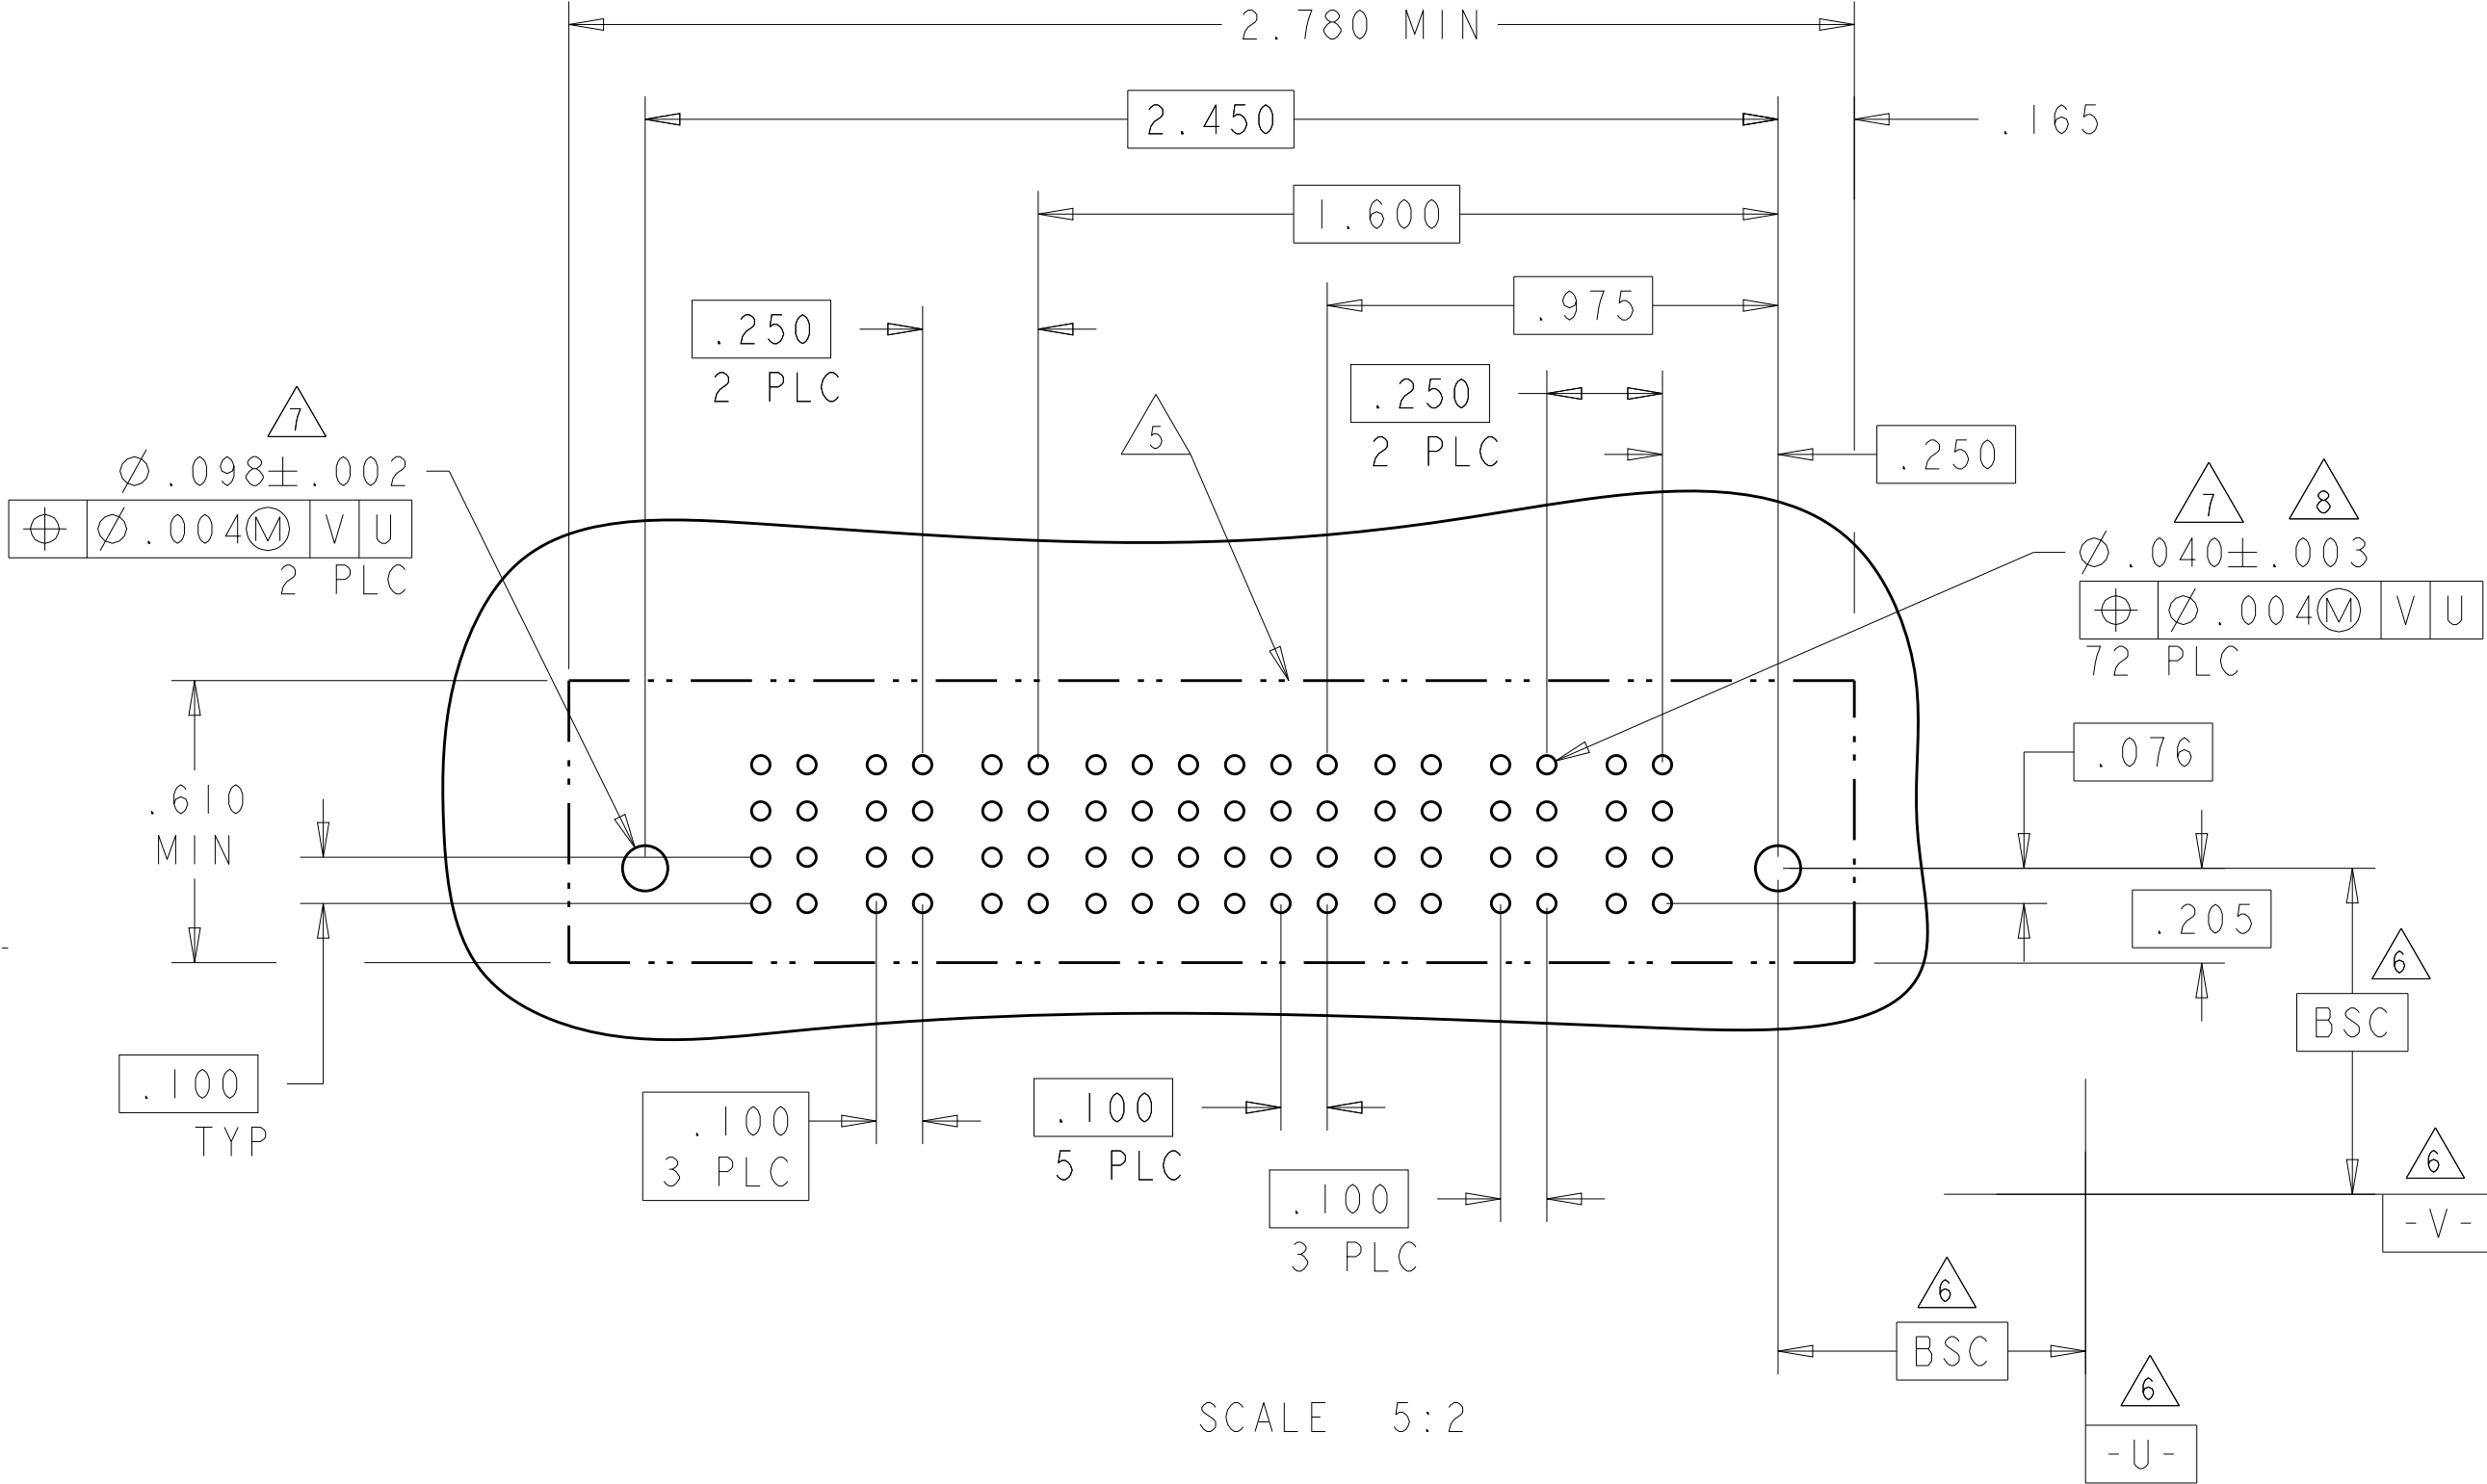

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN R. GRZYBOWSKI 29APR05
CHK M. PERCHERKE 29APR05
APVD M. PERCHERKE

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±2°
FINISH

MATERIAL

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT

CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450540



RESTRICTED TO


SCALE
2:1

SHEET
7

OF
19

REV
K9

PART NUMBER	ROWS		POWER		SIGNAL					POWER								
			P7	P6	5	4	3	2	1	P5	P4	P3	P2	P1				
4-6450540-3	D C B A				AP	AP	AP	AP	AP	AP								
5P + 20S + 2P																		

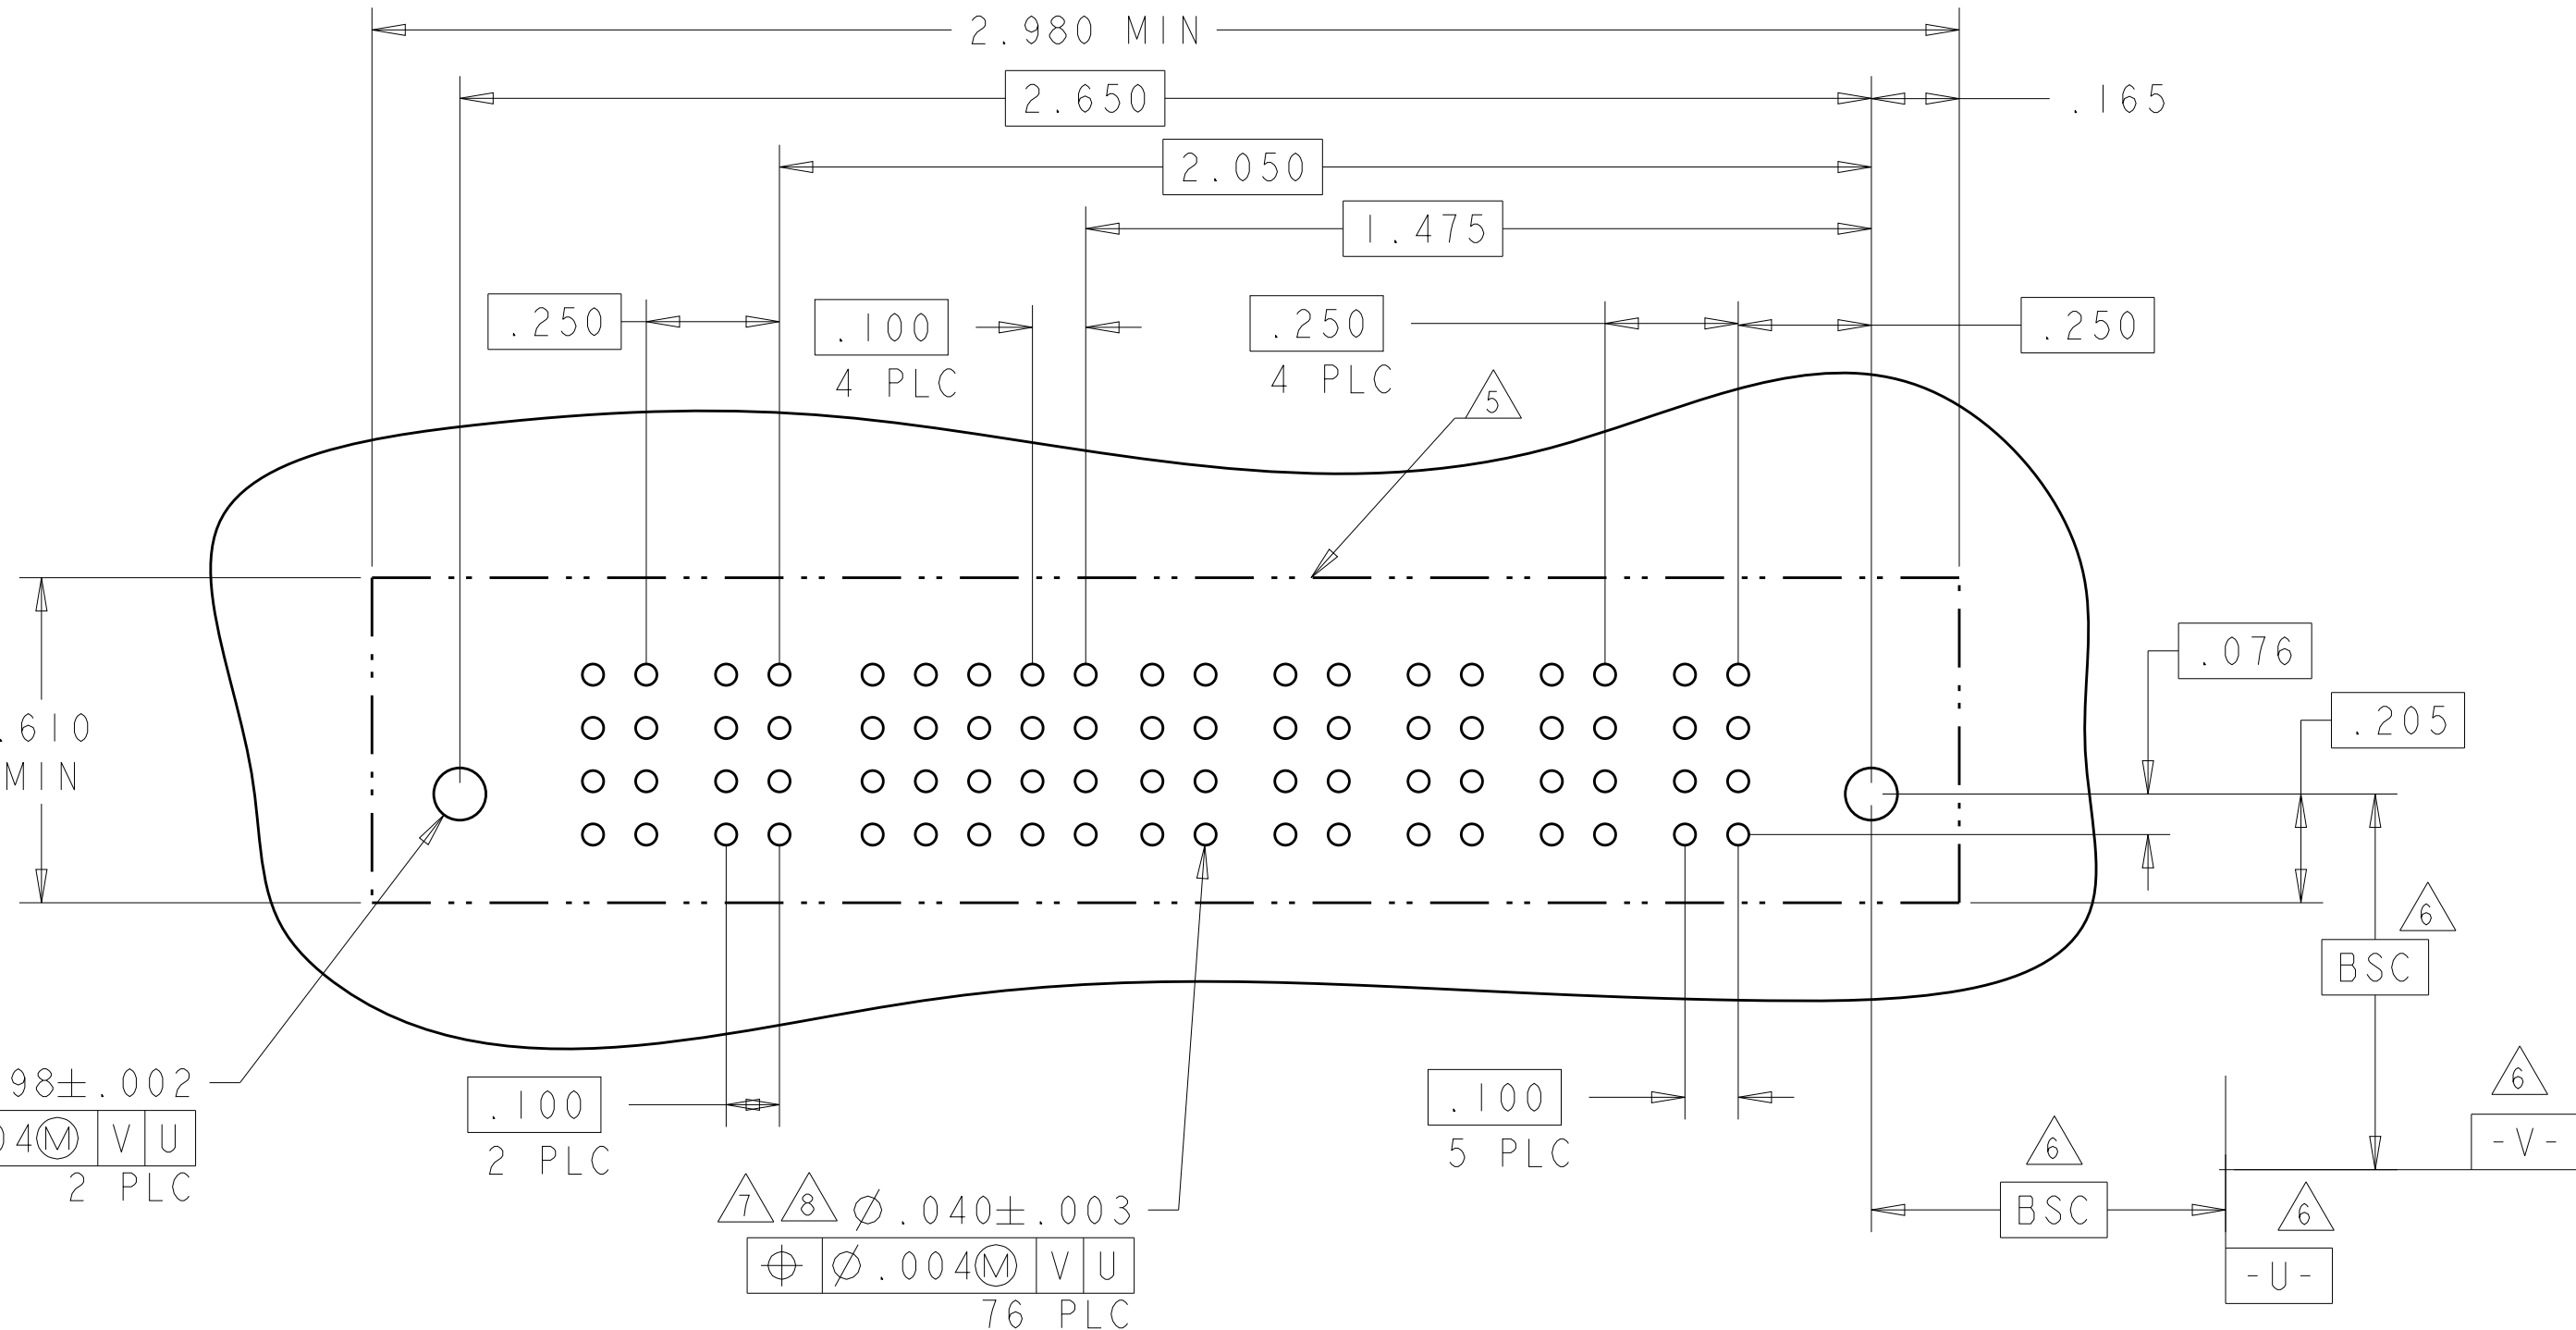


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG R. GRZYBOWSKI 29APR05		 TE Connectivity	
		CHK M. PERCHERKE 29APR05			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 2 PLC ±.01 4 PLC ±.005 4 PLC ±.0020 ANGLES ±°		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC		SIZE	
		108-1973		CASE CODE	
		APPLICATION SPEC		DRAWING NO	
MATERIAL		114-13038		RESTRICTED TO	
FINISH		WEIGHT		-	
		CUSTOMER DRAWING		A1 100779 © 6450540	
				SCALE 2:1 SHEET 8 OF 19 REV KS	

Technical drawing of a mechanical part, likely a filter or screen, showing dimensions and tolerances. The part is a rectangular plate with rounded ends, featuring a central area with a grid of small holes. Key dimensions and features include:


- Overall Length:** 7.500 MIN.
- Top Surface Tolerances:**
 - Left end: $\triangle 6$ $\varnothing .098 \pm .003$ (Feature Control Frame: $\varnothing .004$ M, V, U)
 - Right end: $\varnothing .040 \pm .003$ $\triangle 6$ (Feature Control Frame: $\varnothing .004$ M, V, U), 280PLC
- Bottom Surface Tolerances:**
 - Left end: .610 MIN.
 - Right end: BSD $\triangle 5$, -V- $\triangle 5$, -U- $\triangle 5$
- Internal Features and Dimensions:**
 - Top edge: .100 TYP. (Feature Control Frame: $\triangle 4$)
 - Right edge: .135 REF
 - Internal horizontal dimensions: 4.050, 3.025
 - Internal vertical dimensions: .205, .077
 - Internal horizontal segments: .250, .100 (29PLC), .100 (9PLC), .100 (29PLC)
 - Internal vertical segments: .100 (29PLC), .100 (9PLC), .100 (29PLC)



[illegible]4805 (3/11)


PART NUMBER	ROWS	POWER										
		P11	P10	P9	P8	P7	P6	P5	P3	P2	P1	
4-6450540-2	D C B A	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	
11HDP												

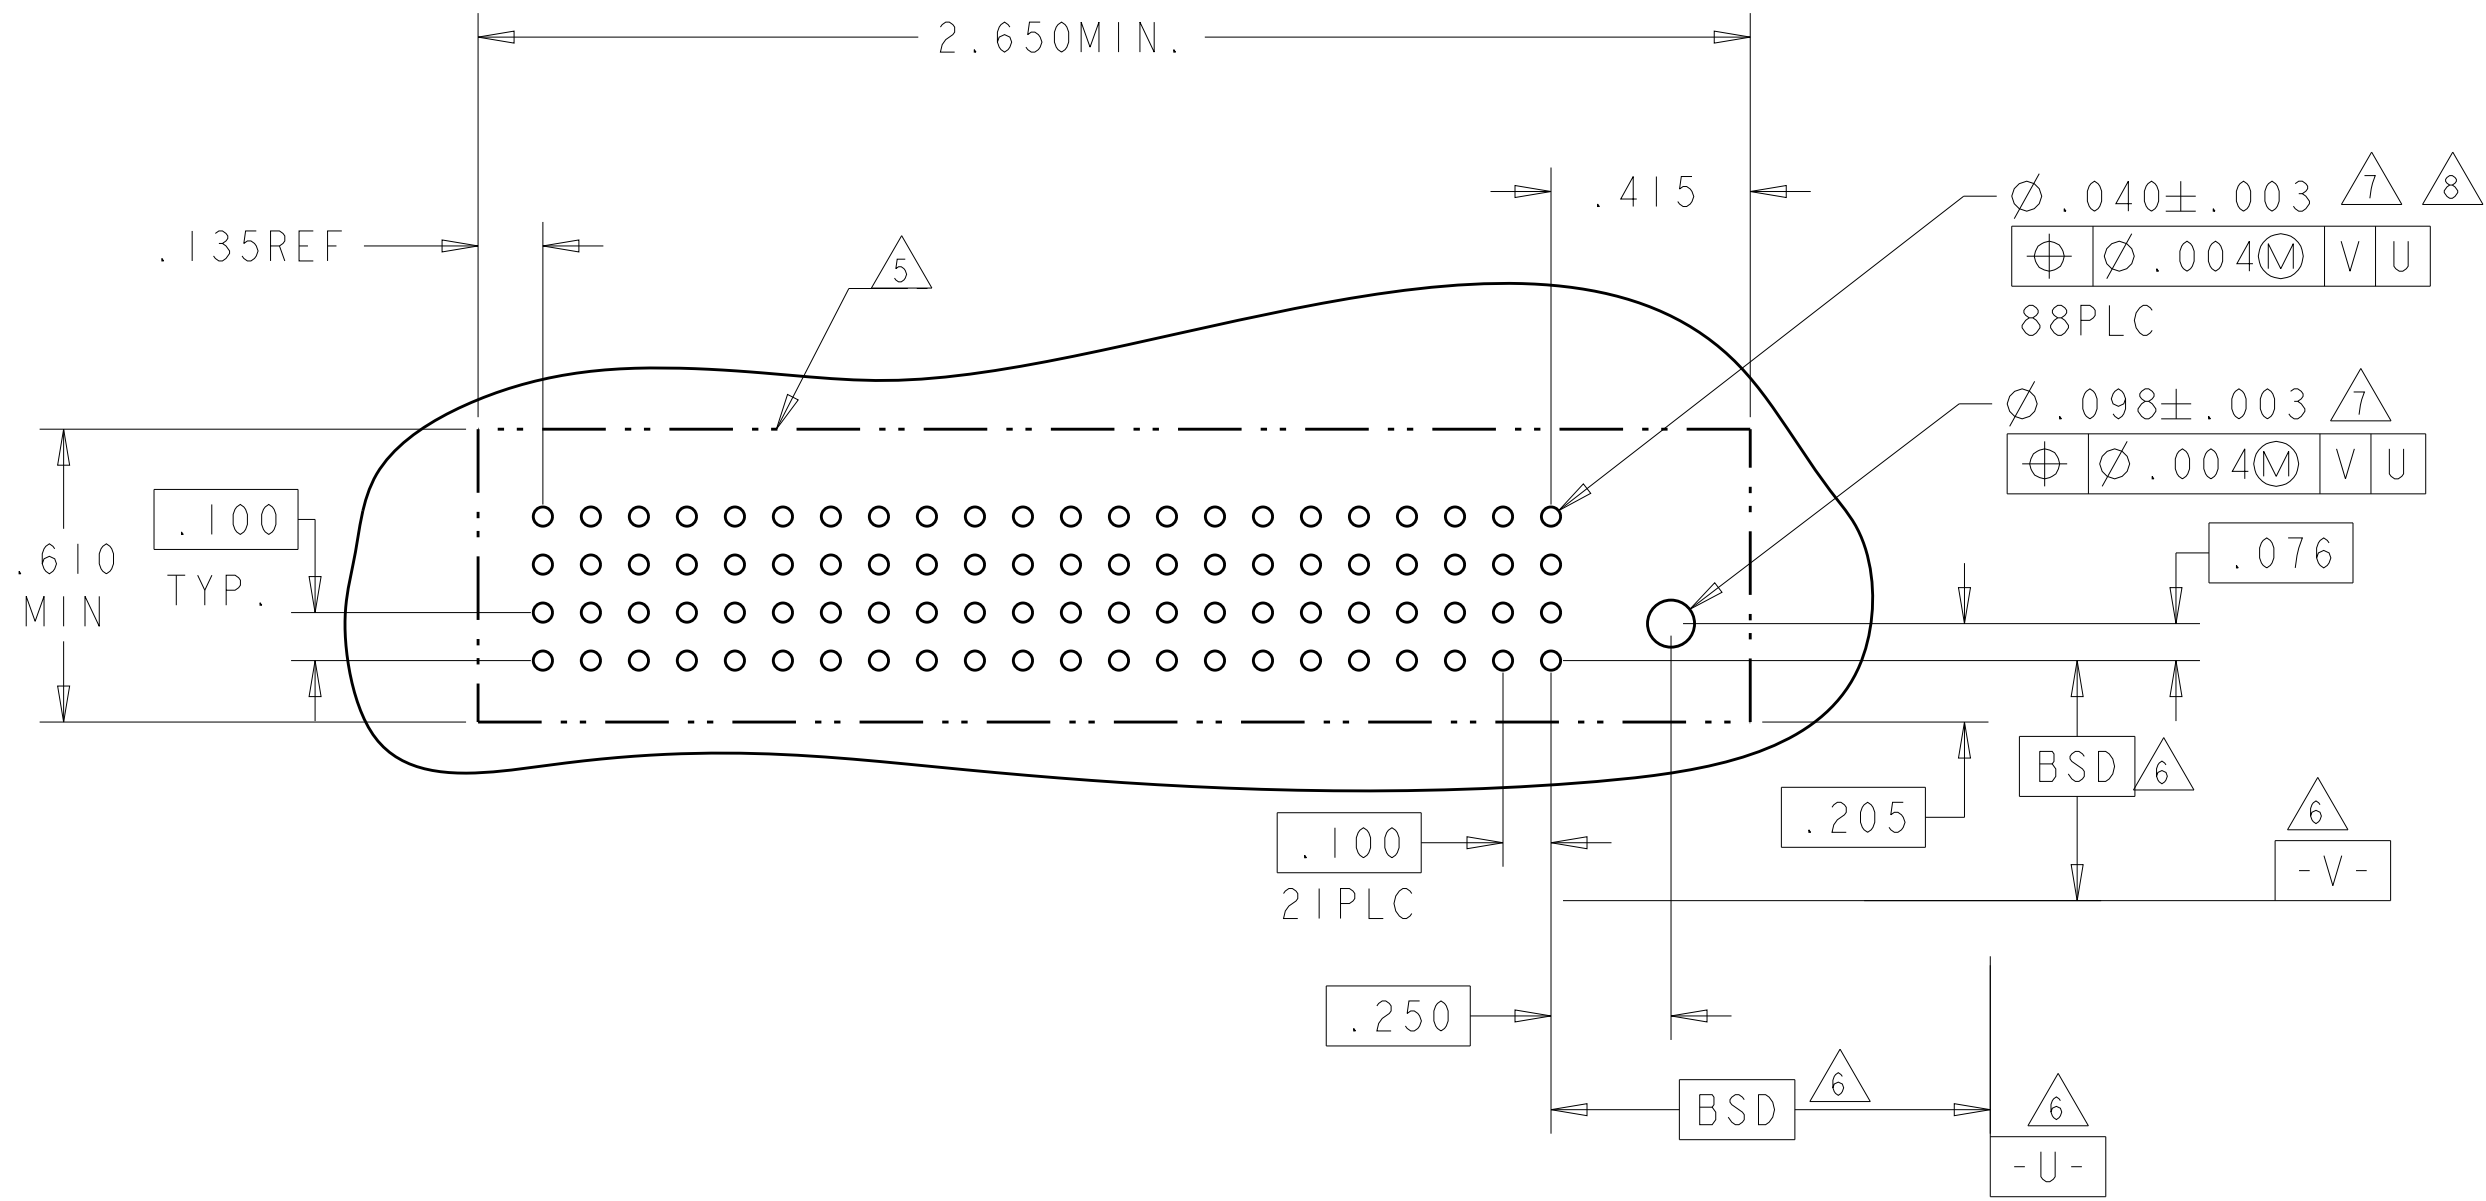4805 (3/11)


PART NUMBER	ROWS	POWER											
		P12	P11	P10	P9	P8	P7	P6	P5	P3	P2		P1
4-6450540-5	DC CB A	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	HD
12HDP													

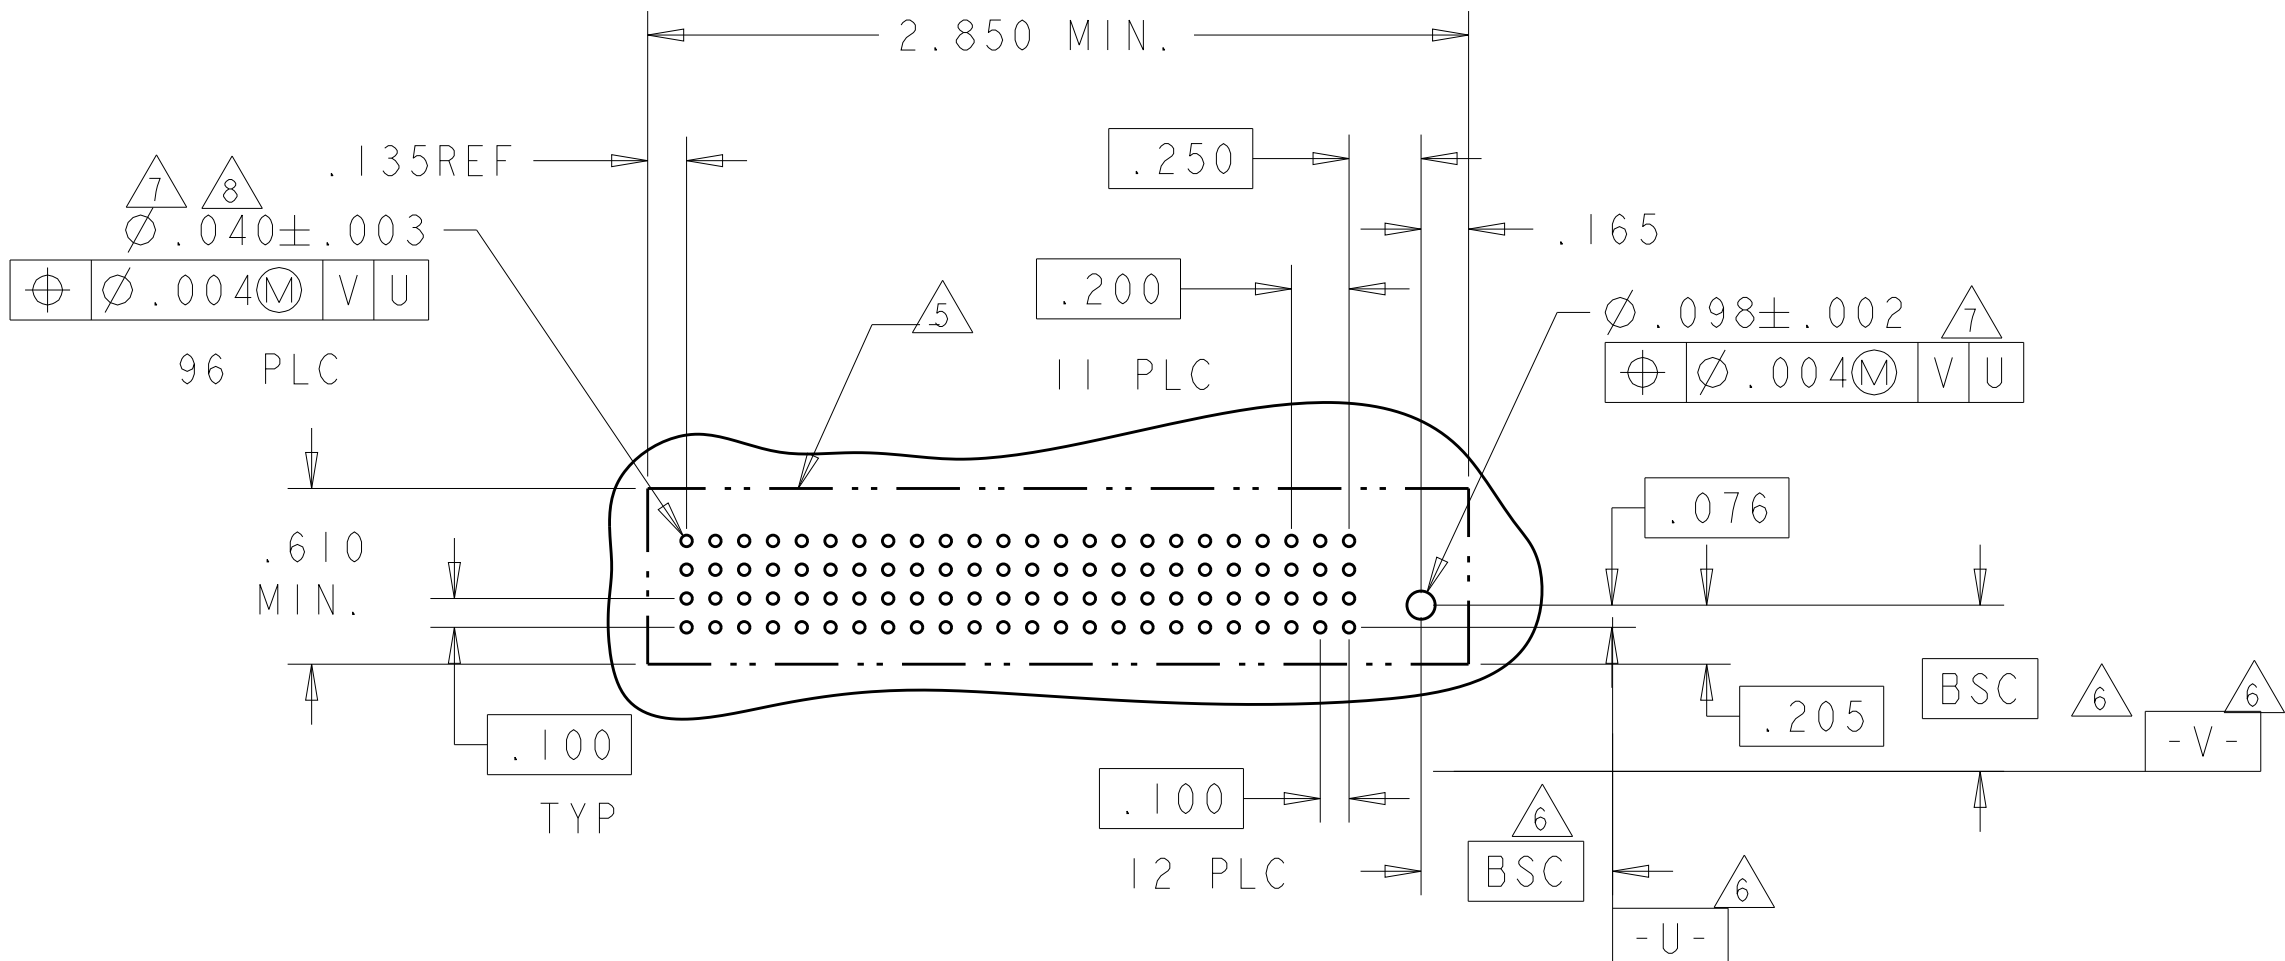




PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
4-6450540-7	D C B A										
3P + 8S + 3P											

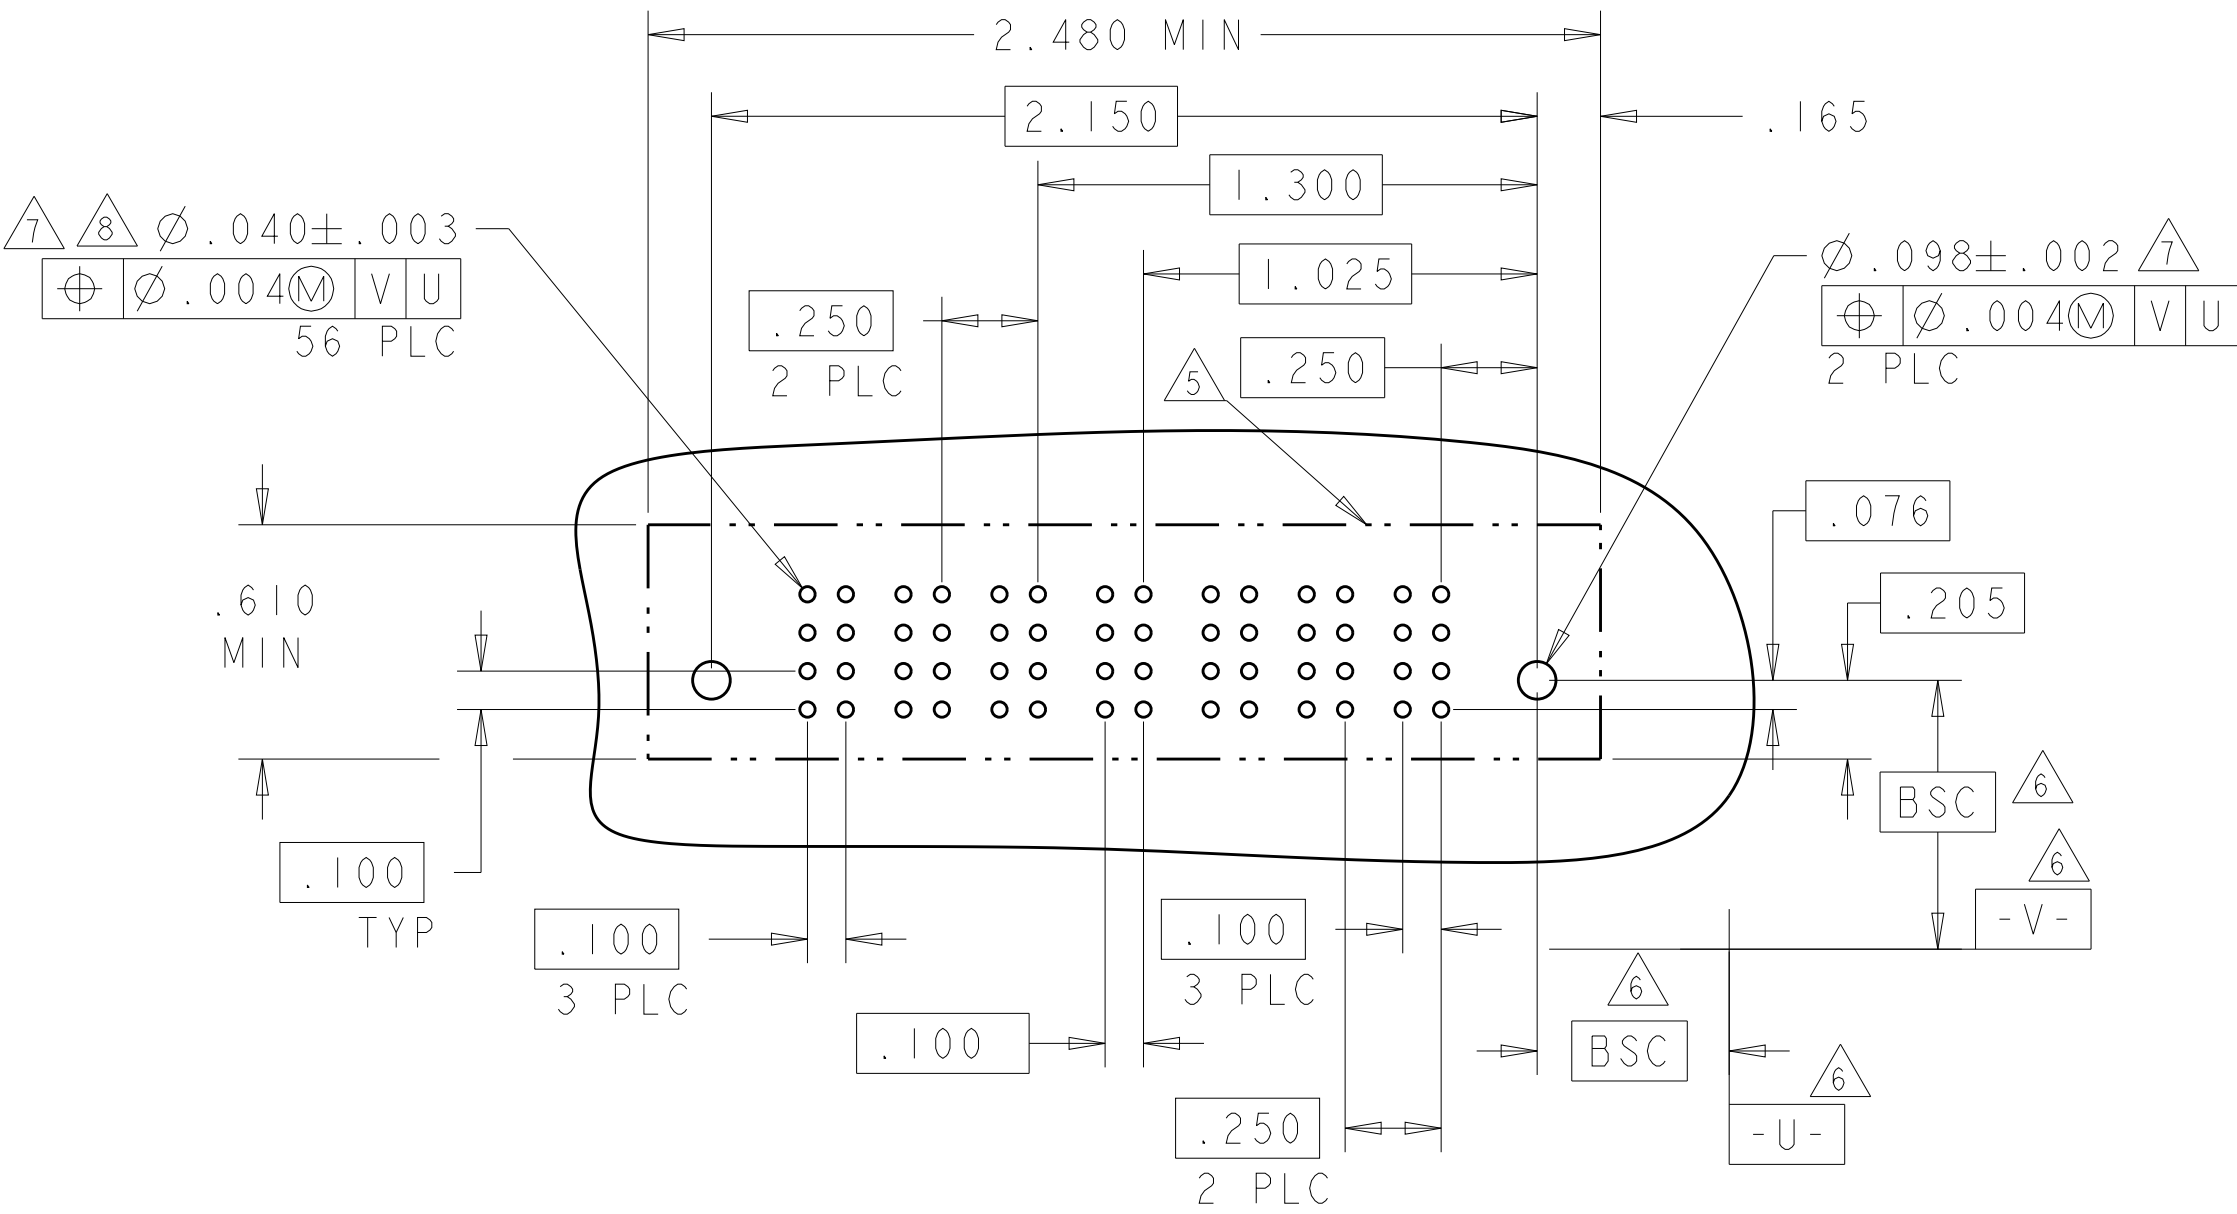4805 (3/11)

LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	OWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
4-6450540-8	D C B A		GS	AP	AP	AP	AP	GS			
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				HD						HD	
IP + 16S + 1P											

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
5-6450540-1	D C B A				AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
2P + 16S + 2P											

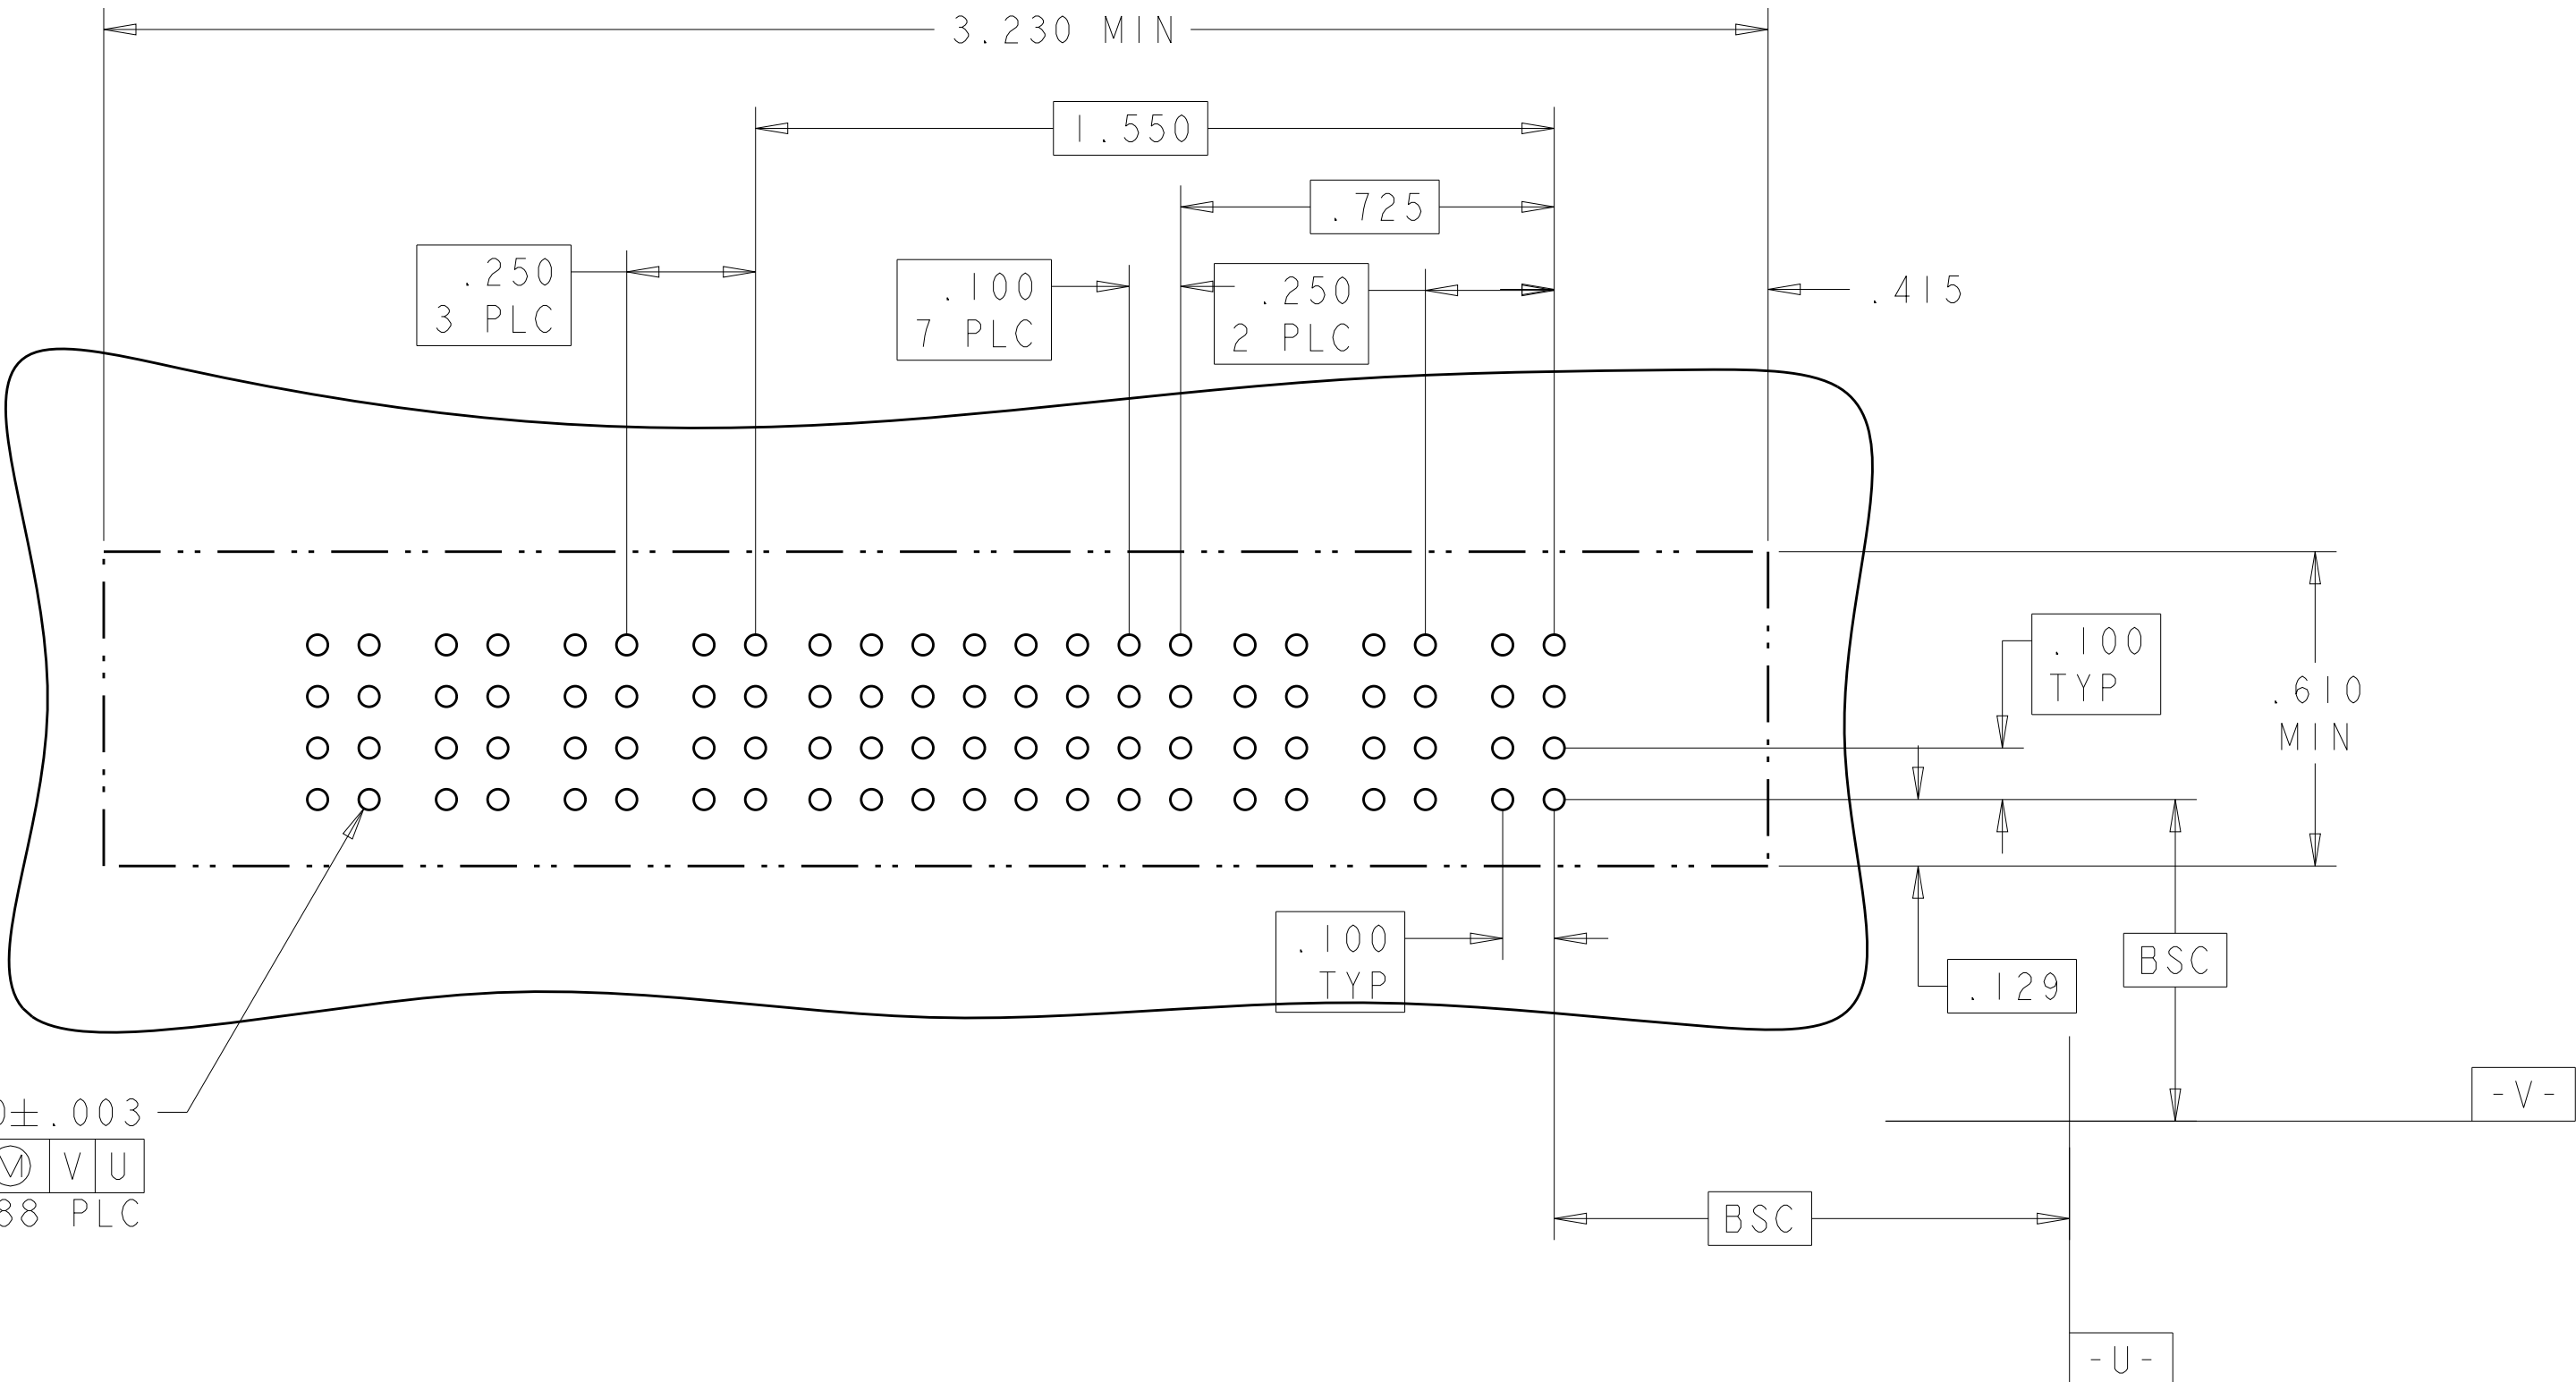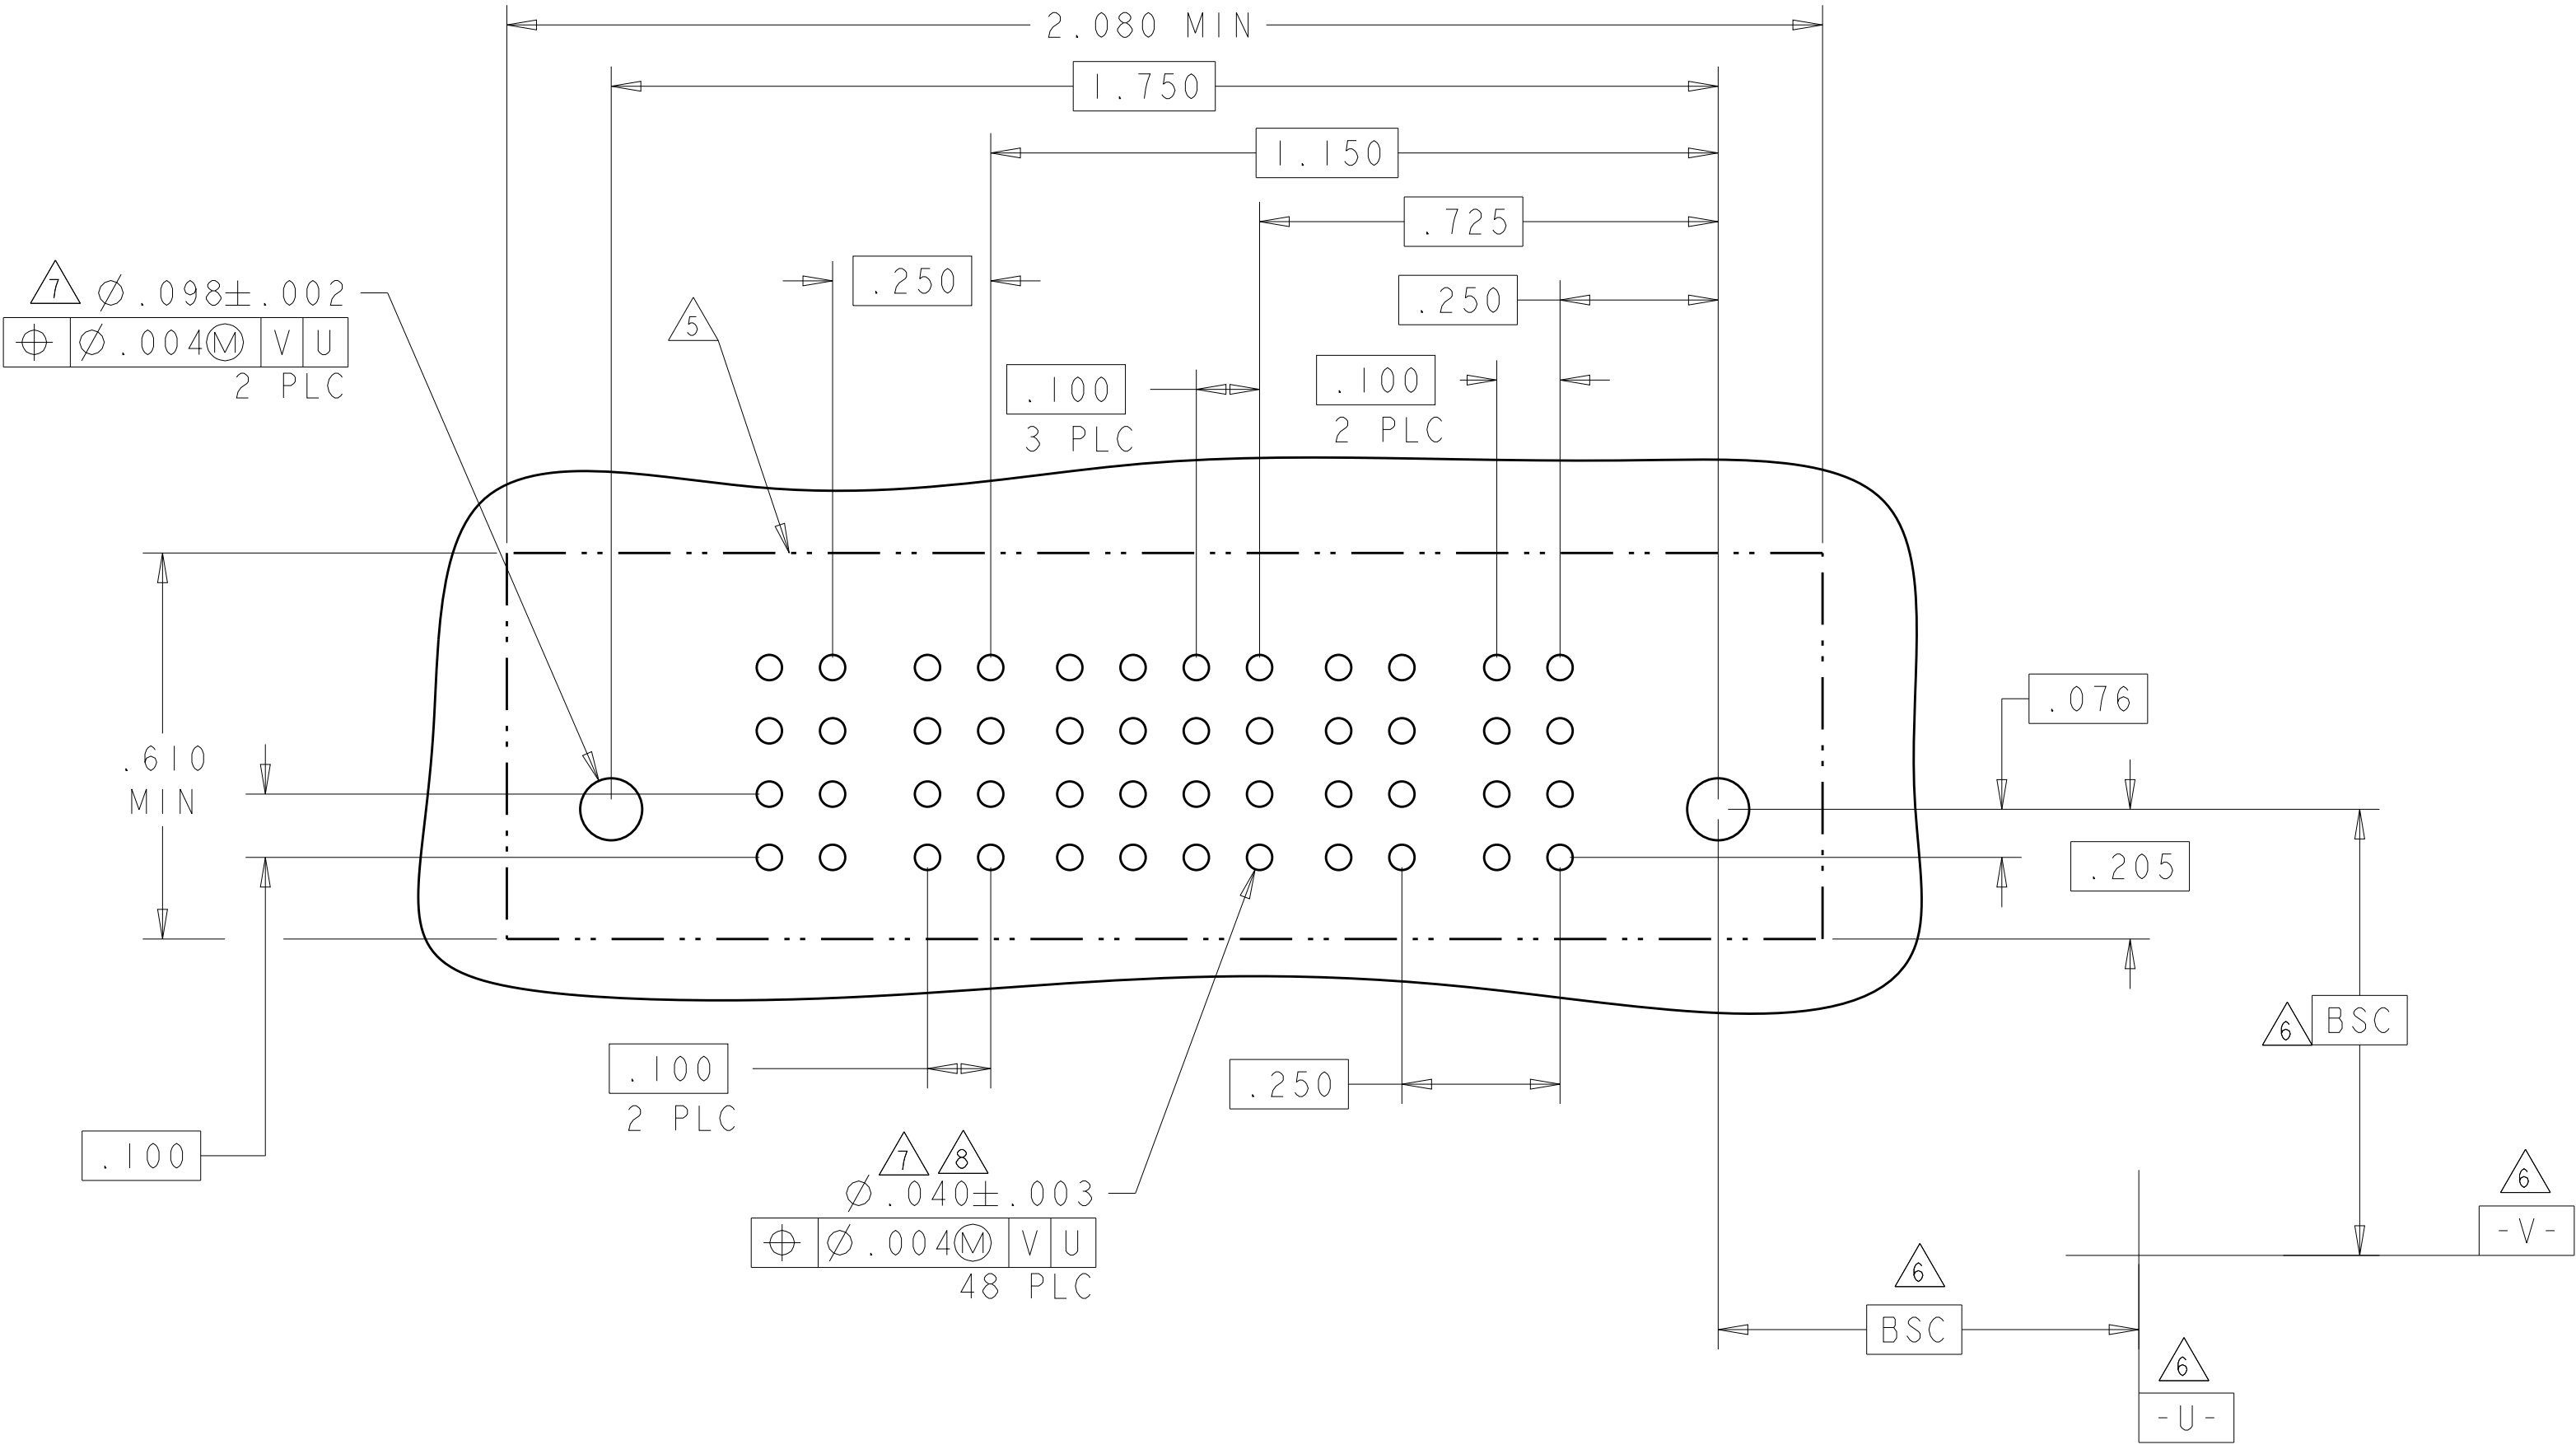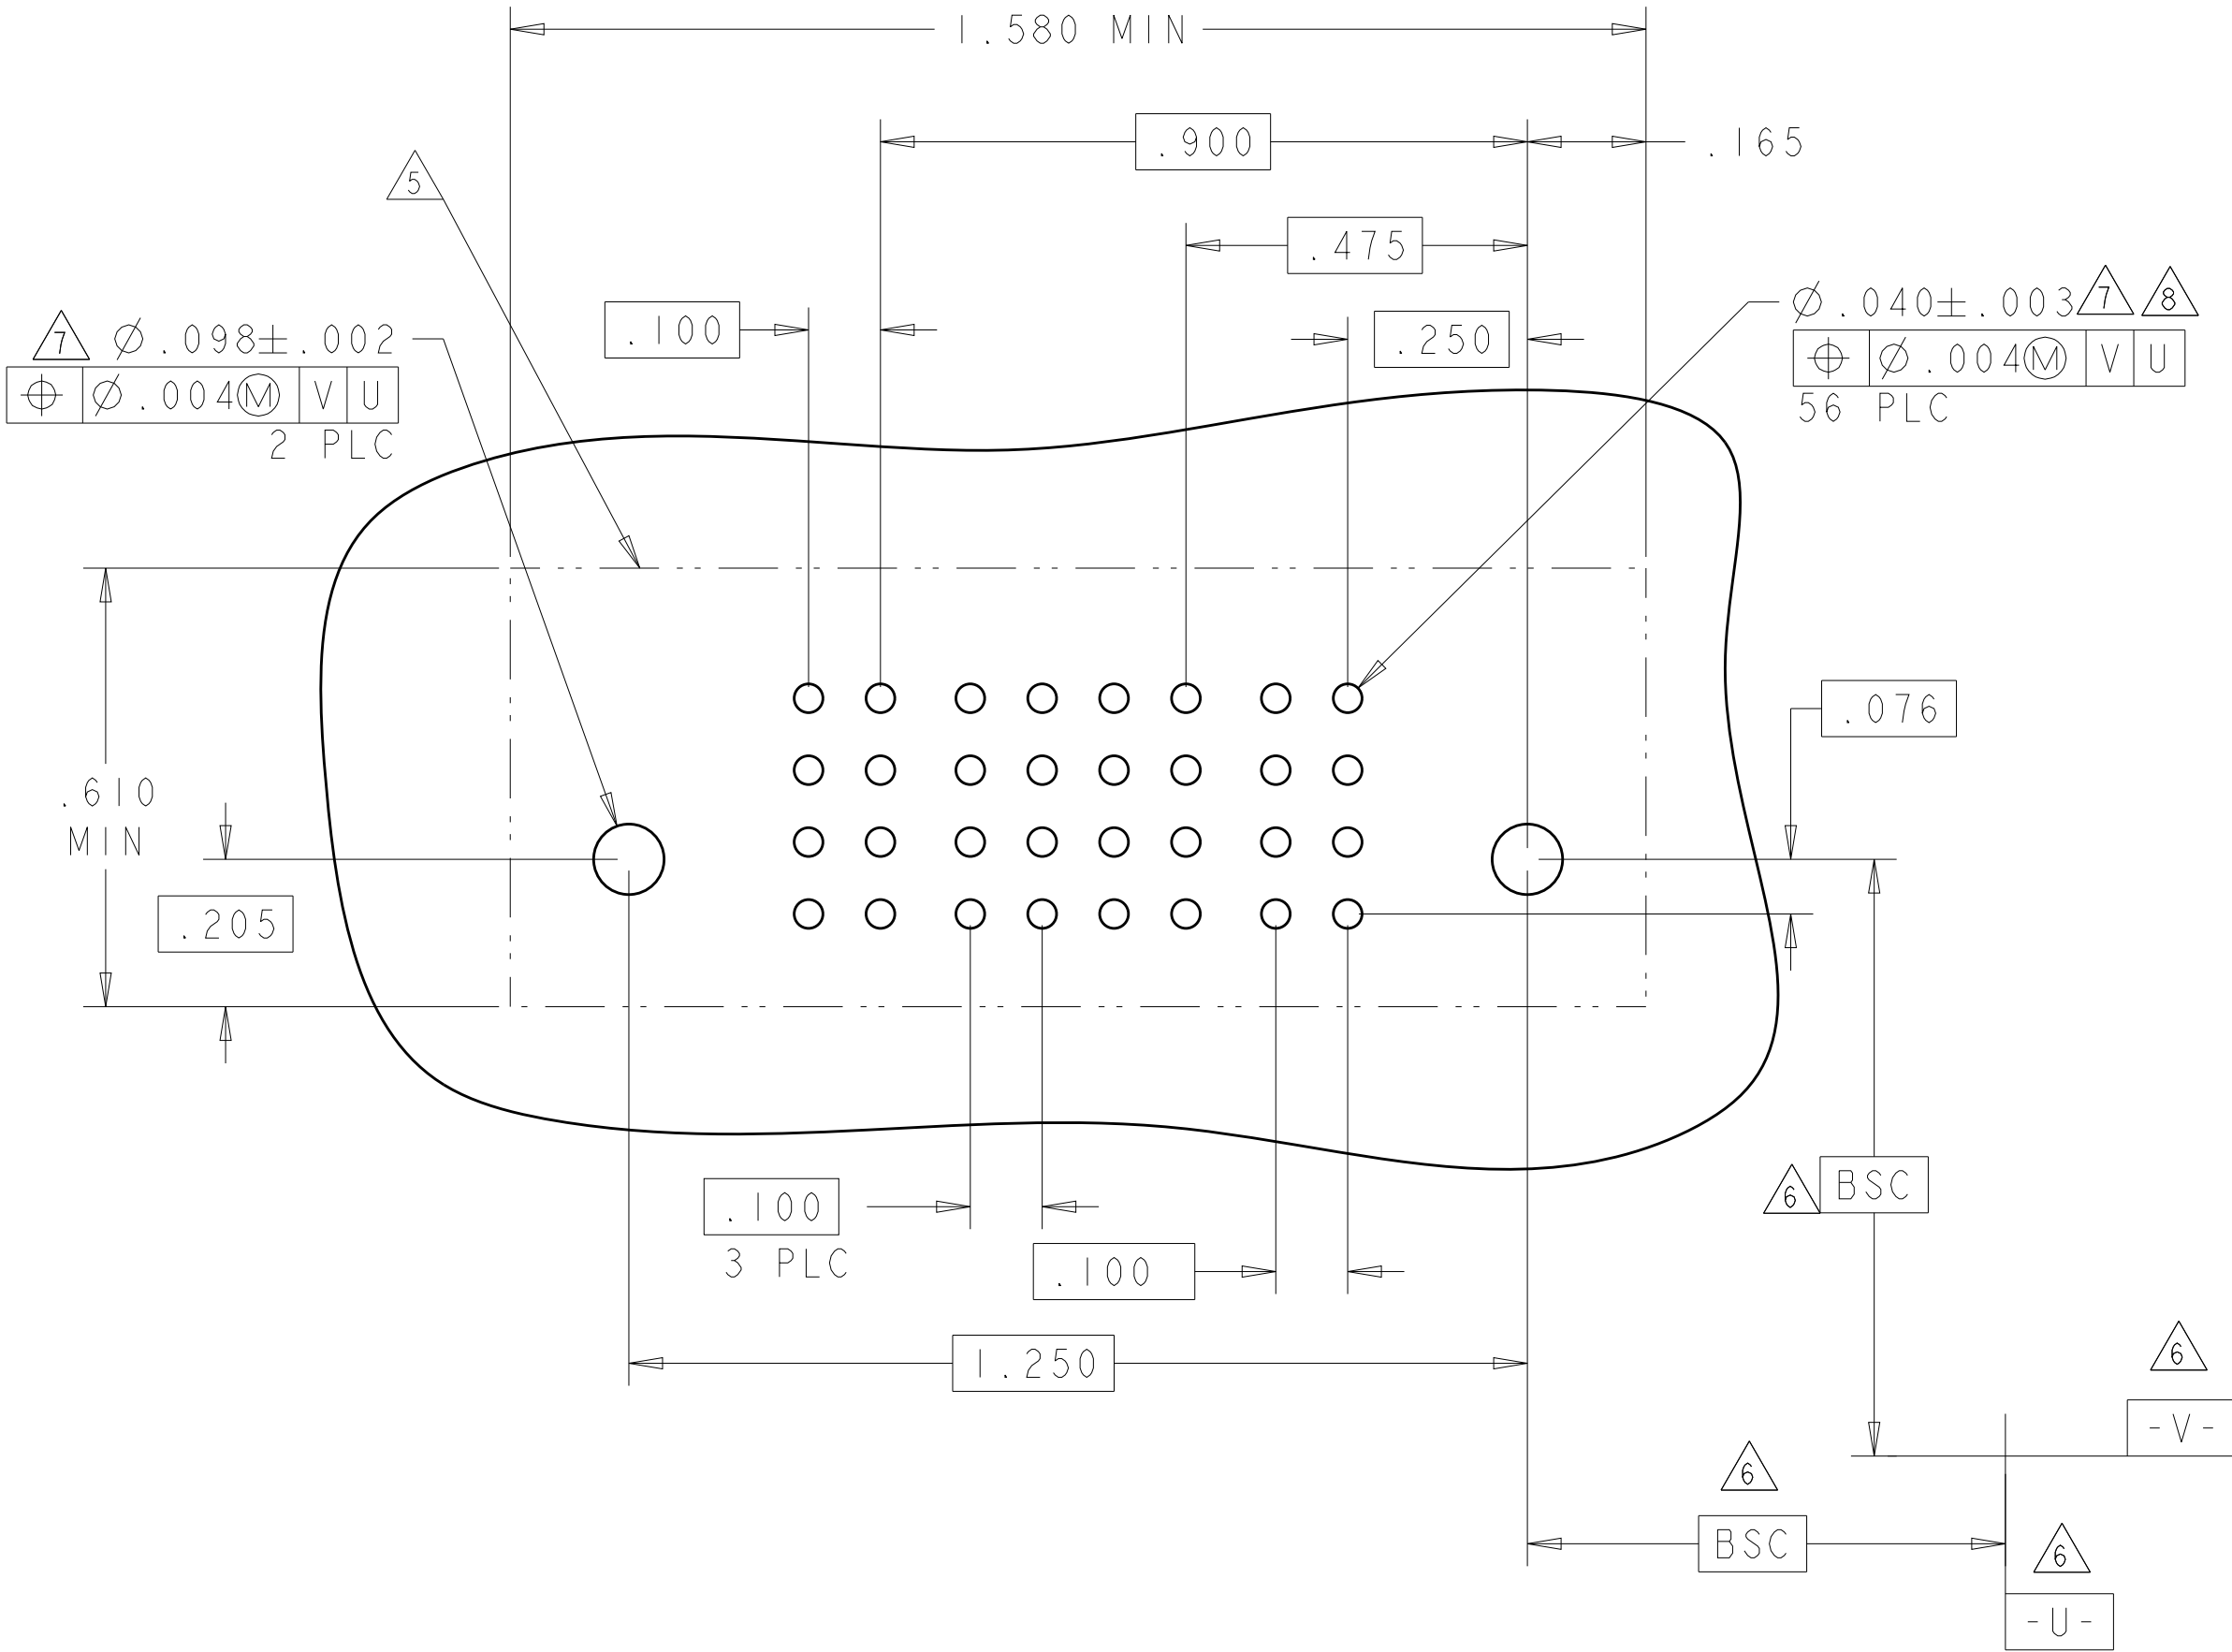

PART NUMBER	ROWS		POWER				SIGNAL								POWER				
			P7	P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1		
1-6450540-1	D C B A						P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
3P + 32S + 4P																			

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN: R. GRZYBOWSKI 29APR05
CHK: M. PERCHERKE 29APR05
APVD: M. PERCHERKE

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

FINISH

PRODUCT SPEC: 108-1973

APPLICATION SPEC: 114-13038

WEIGHT: -

CUSTOMER DRAWING

NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE: A1
CAGE CODE: 100779
DRAWING NO: 6450540


RESTRICTED TO: -

SCALE: 2:1
SHEET: 12 OF 19
REV: K9

TE Connectivity


VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
5-6450540-3	D C B A					AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
4P + 24S + 4P																	


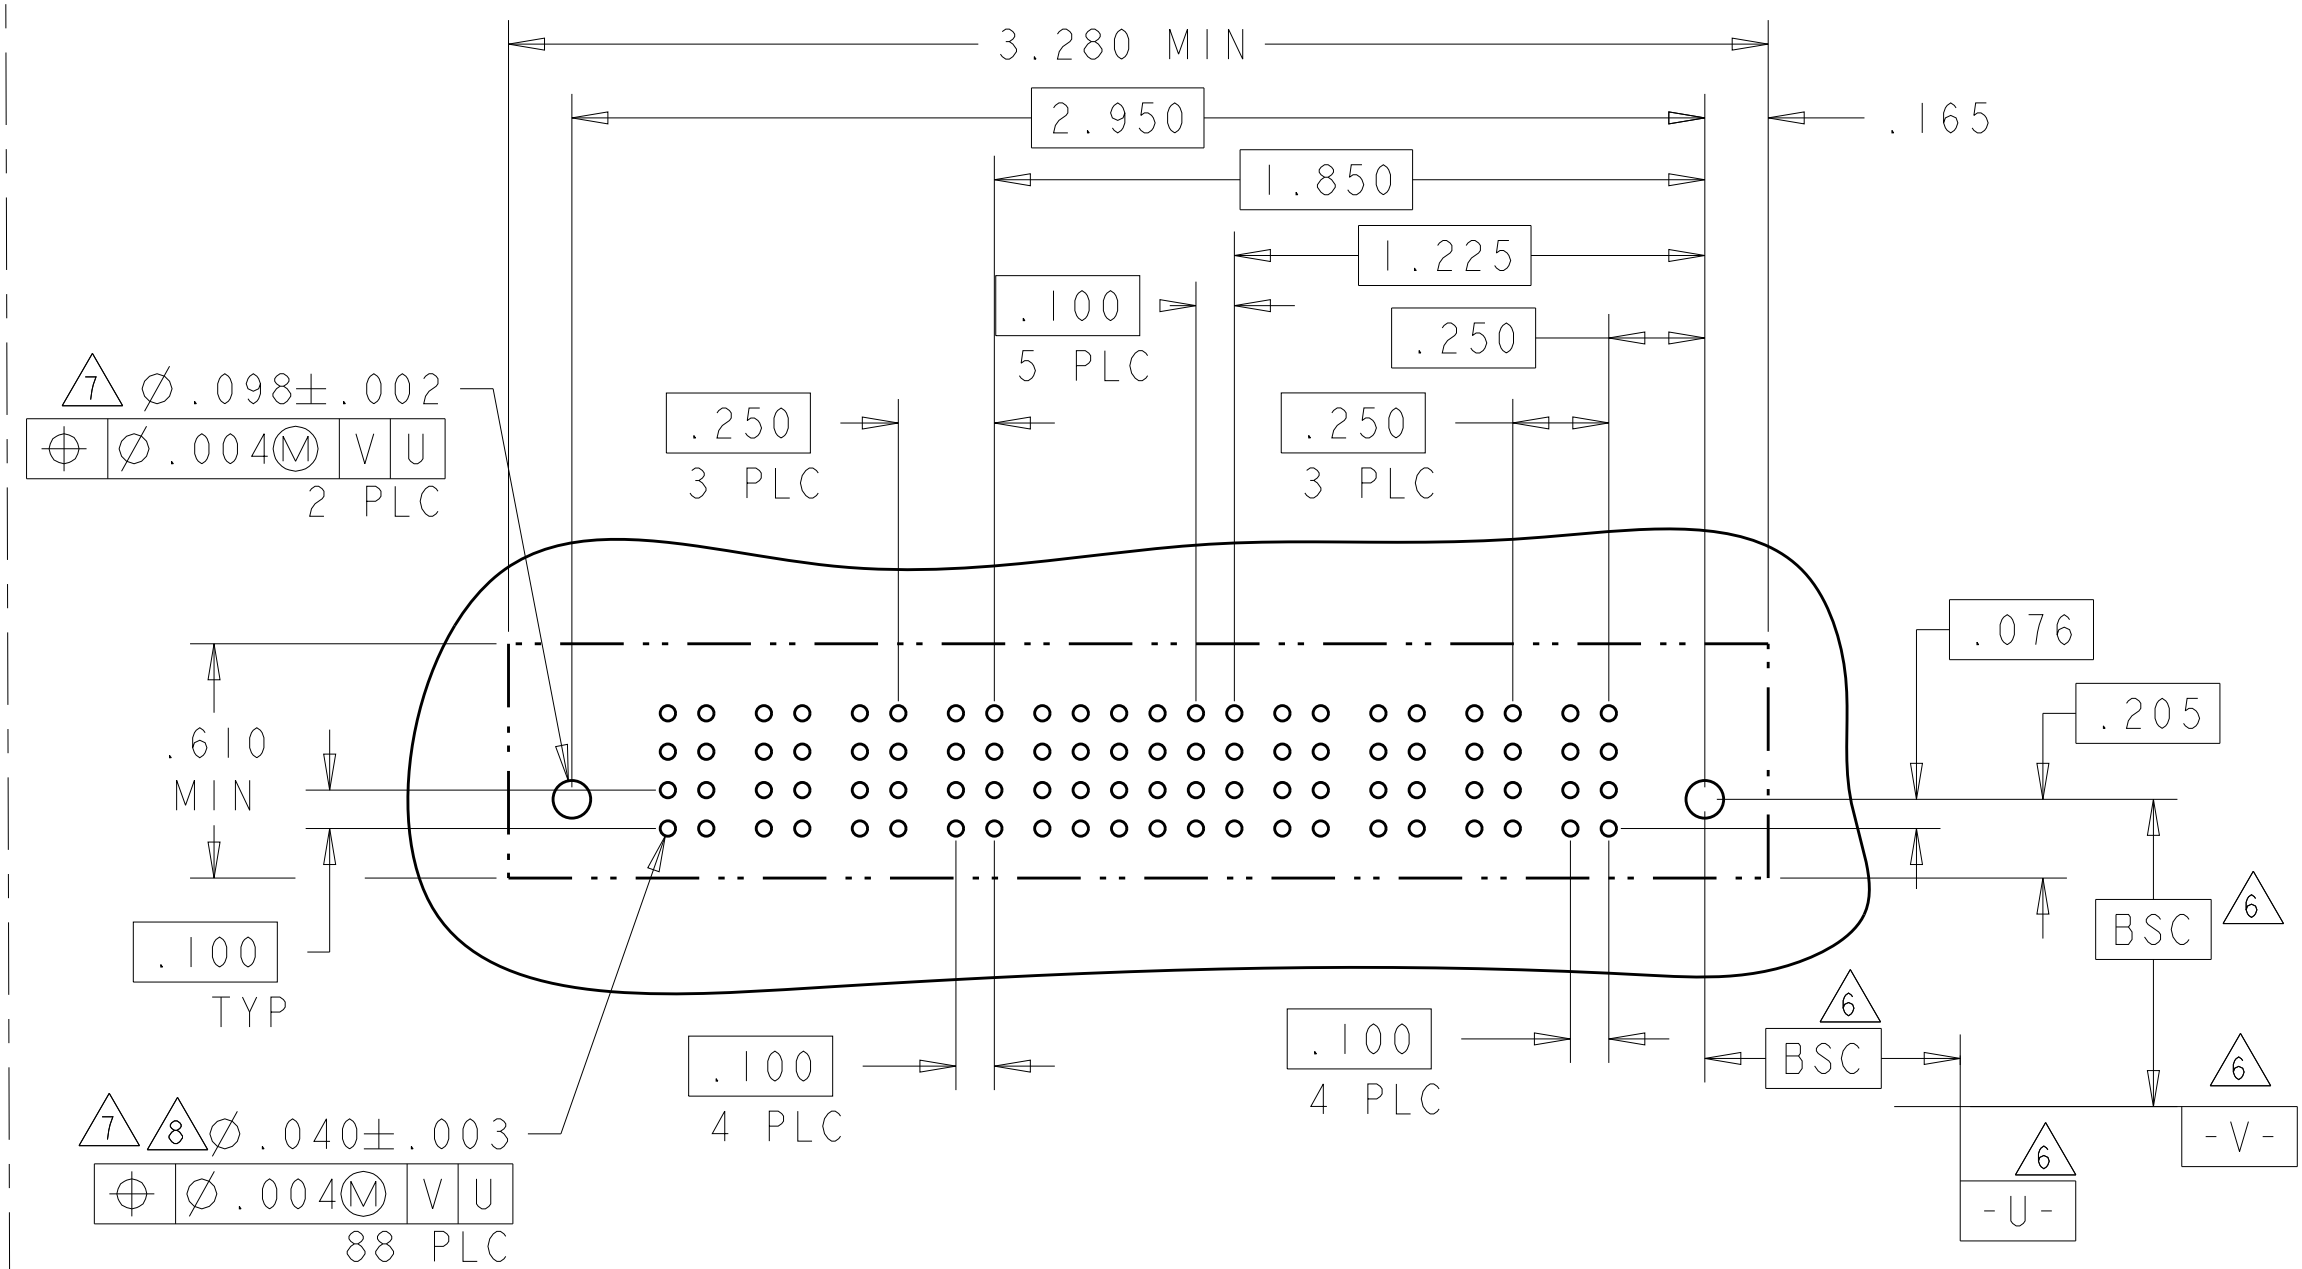


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
		CHK M. PERCHERKE 29APR05			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
INCHES		-			
		APVD M. PERCHERKE			
		PRODUCT SPEC			
		108-1973			
		APPLICATION SPEC			
		114-13038			
		-		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL		FINISH		A100779G-6450540 -	
		WEIGHT			
		CUSTOMER DRAWING		SCALE 2:1 SHEET 13 OF 19 REV K9	

PART NUMBER	ROWS		POWER			SIGNAL				POWER				
			P7	P6	P5	4	3	2	1	P4	P3	P2	P1	
5-6450540-4	D C B A				P	P	P	P	VS	VS	VS	VS		
					P	P	P	P						
					P	P	P	P						
					P	P	P	P						
4P + 16S + 3P														

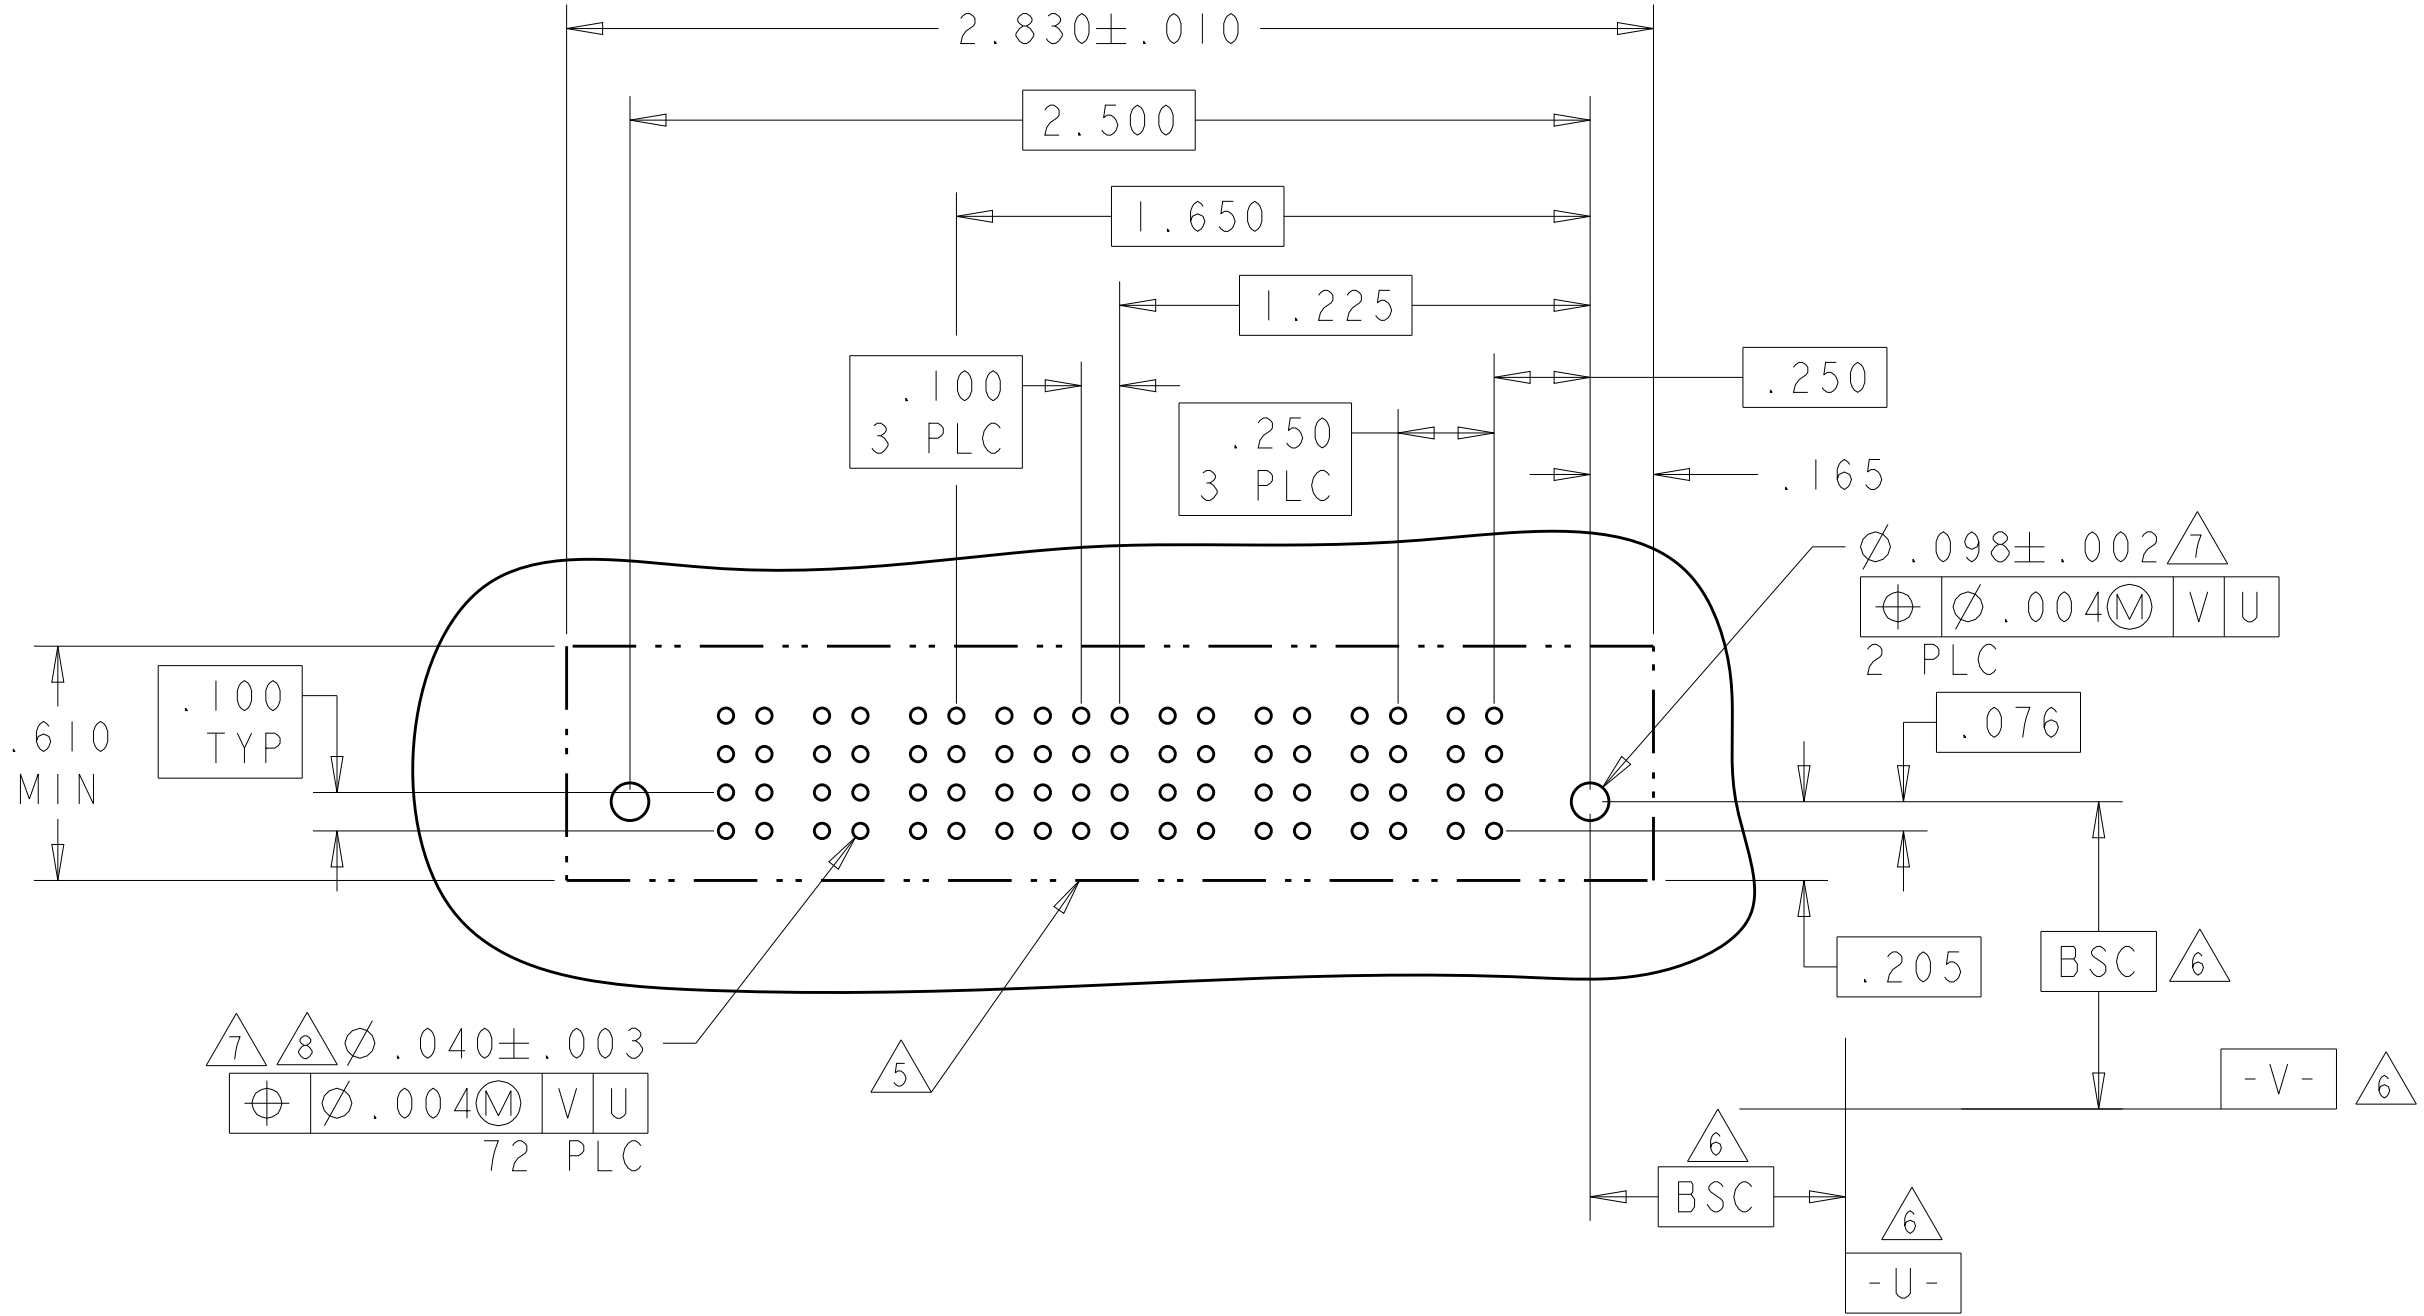

PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
5-6450540-5	D C B A	<									

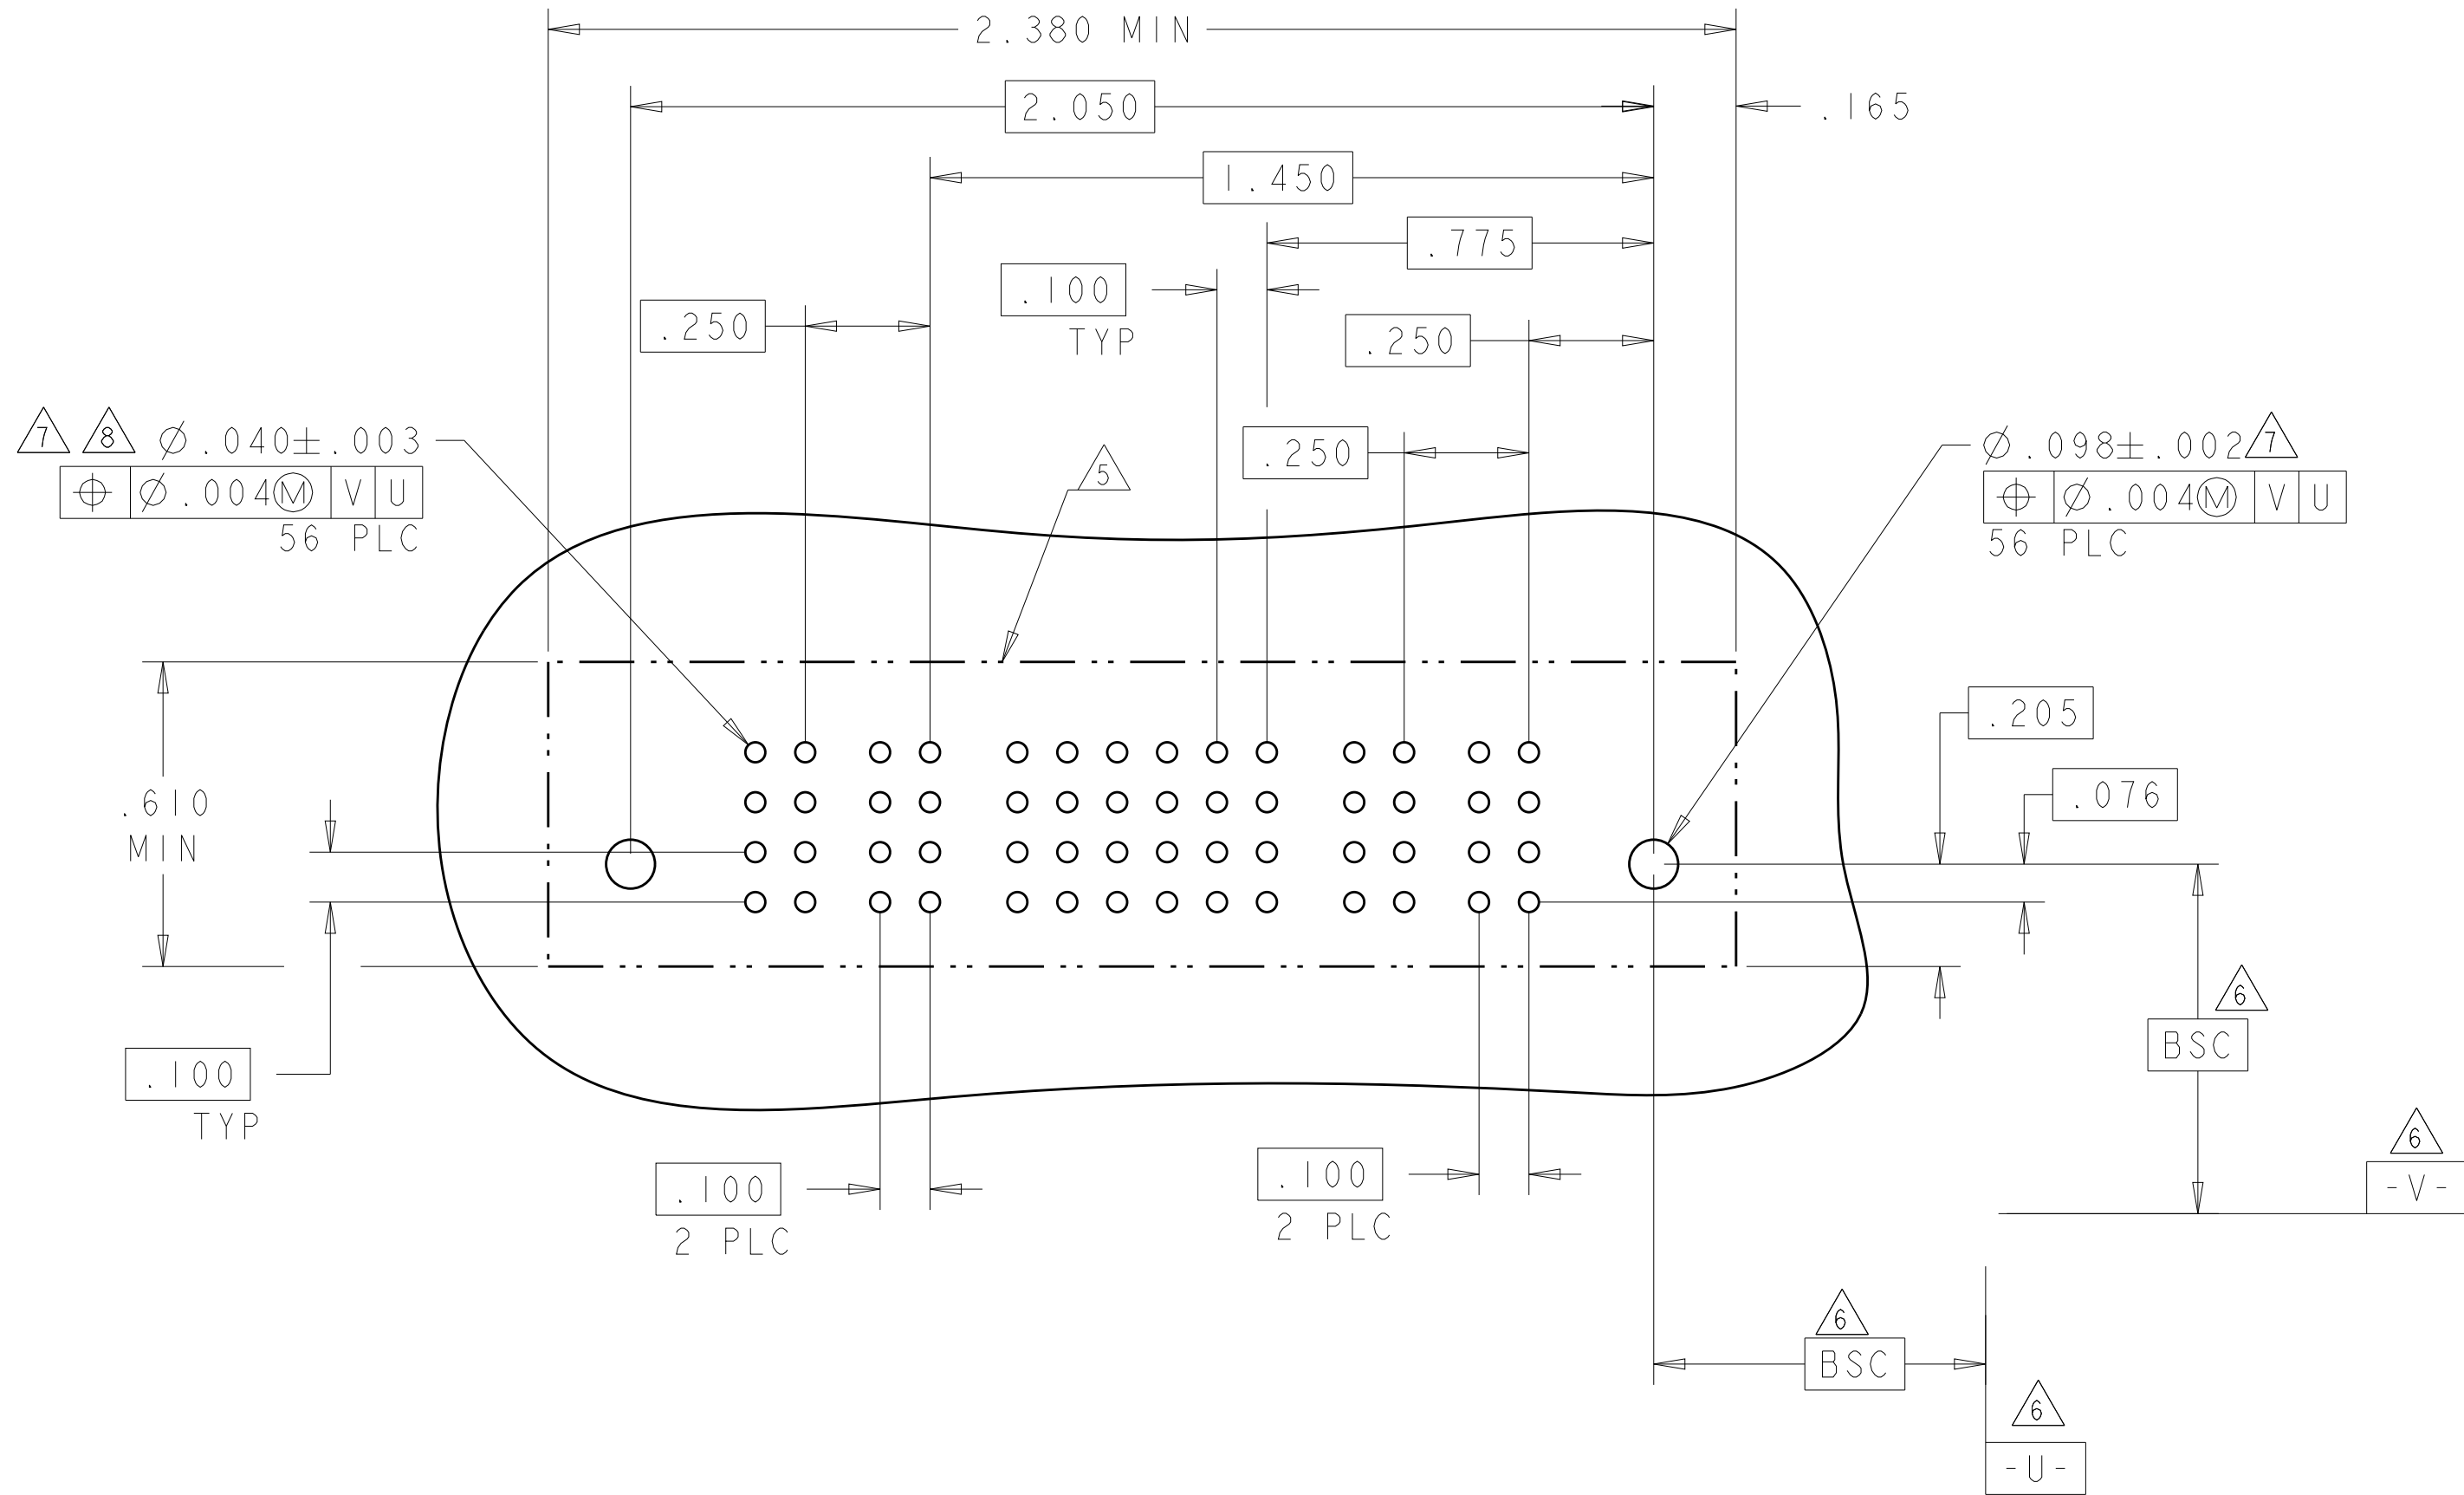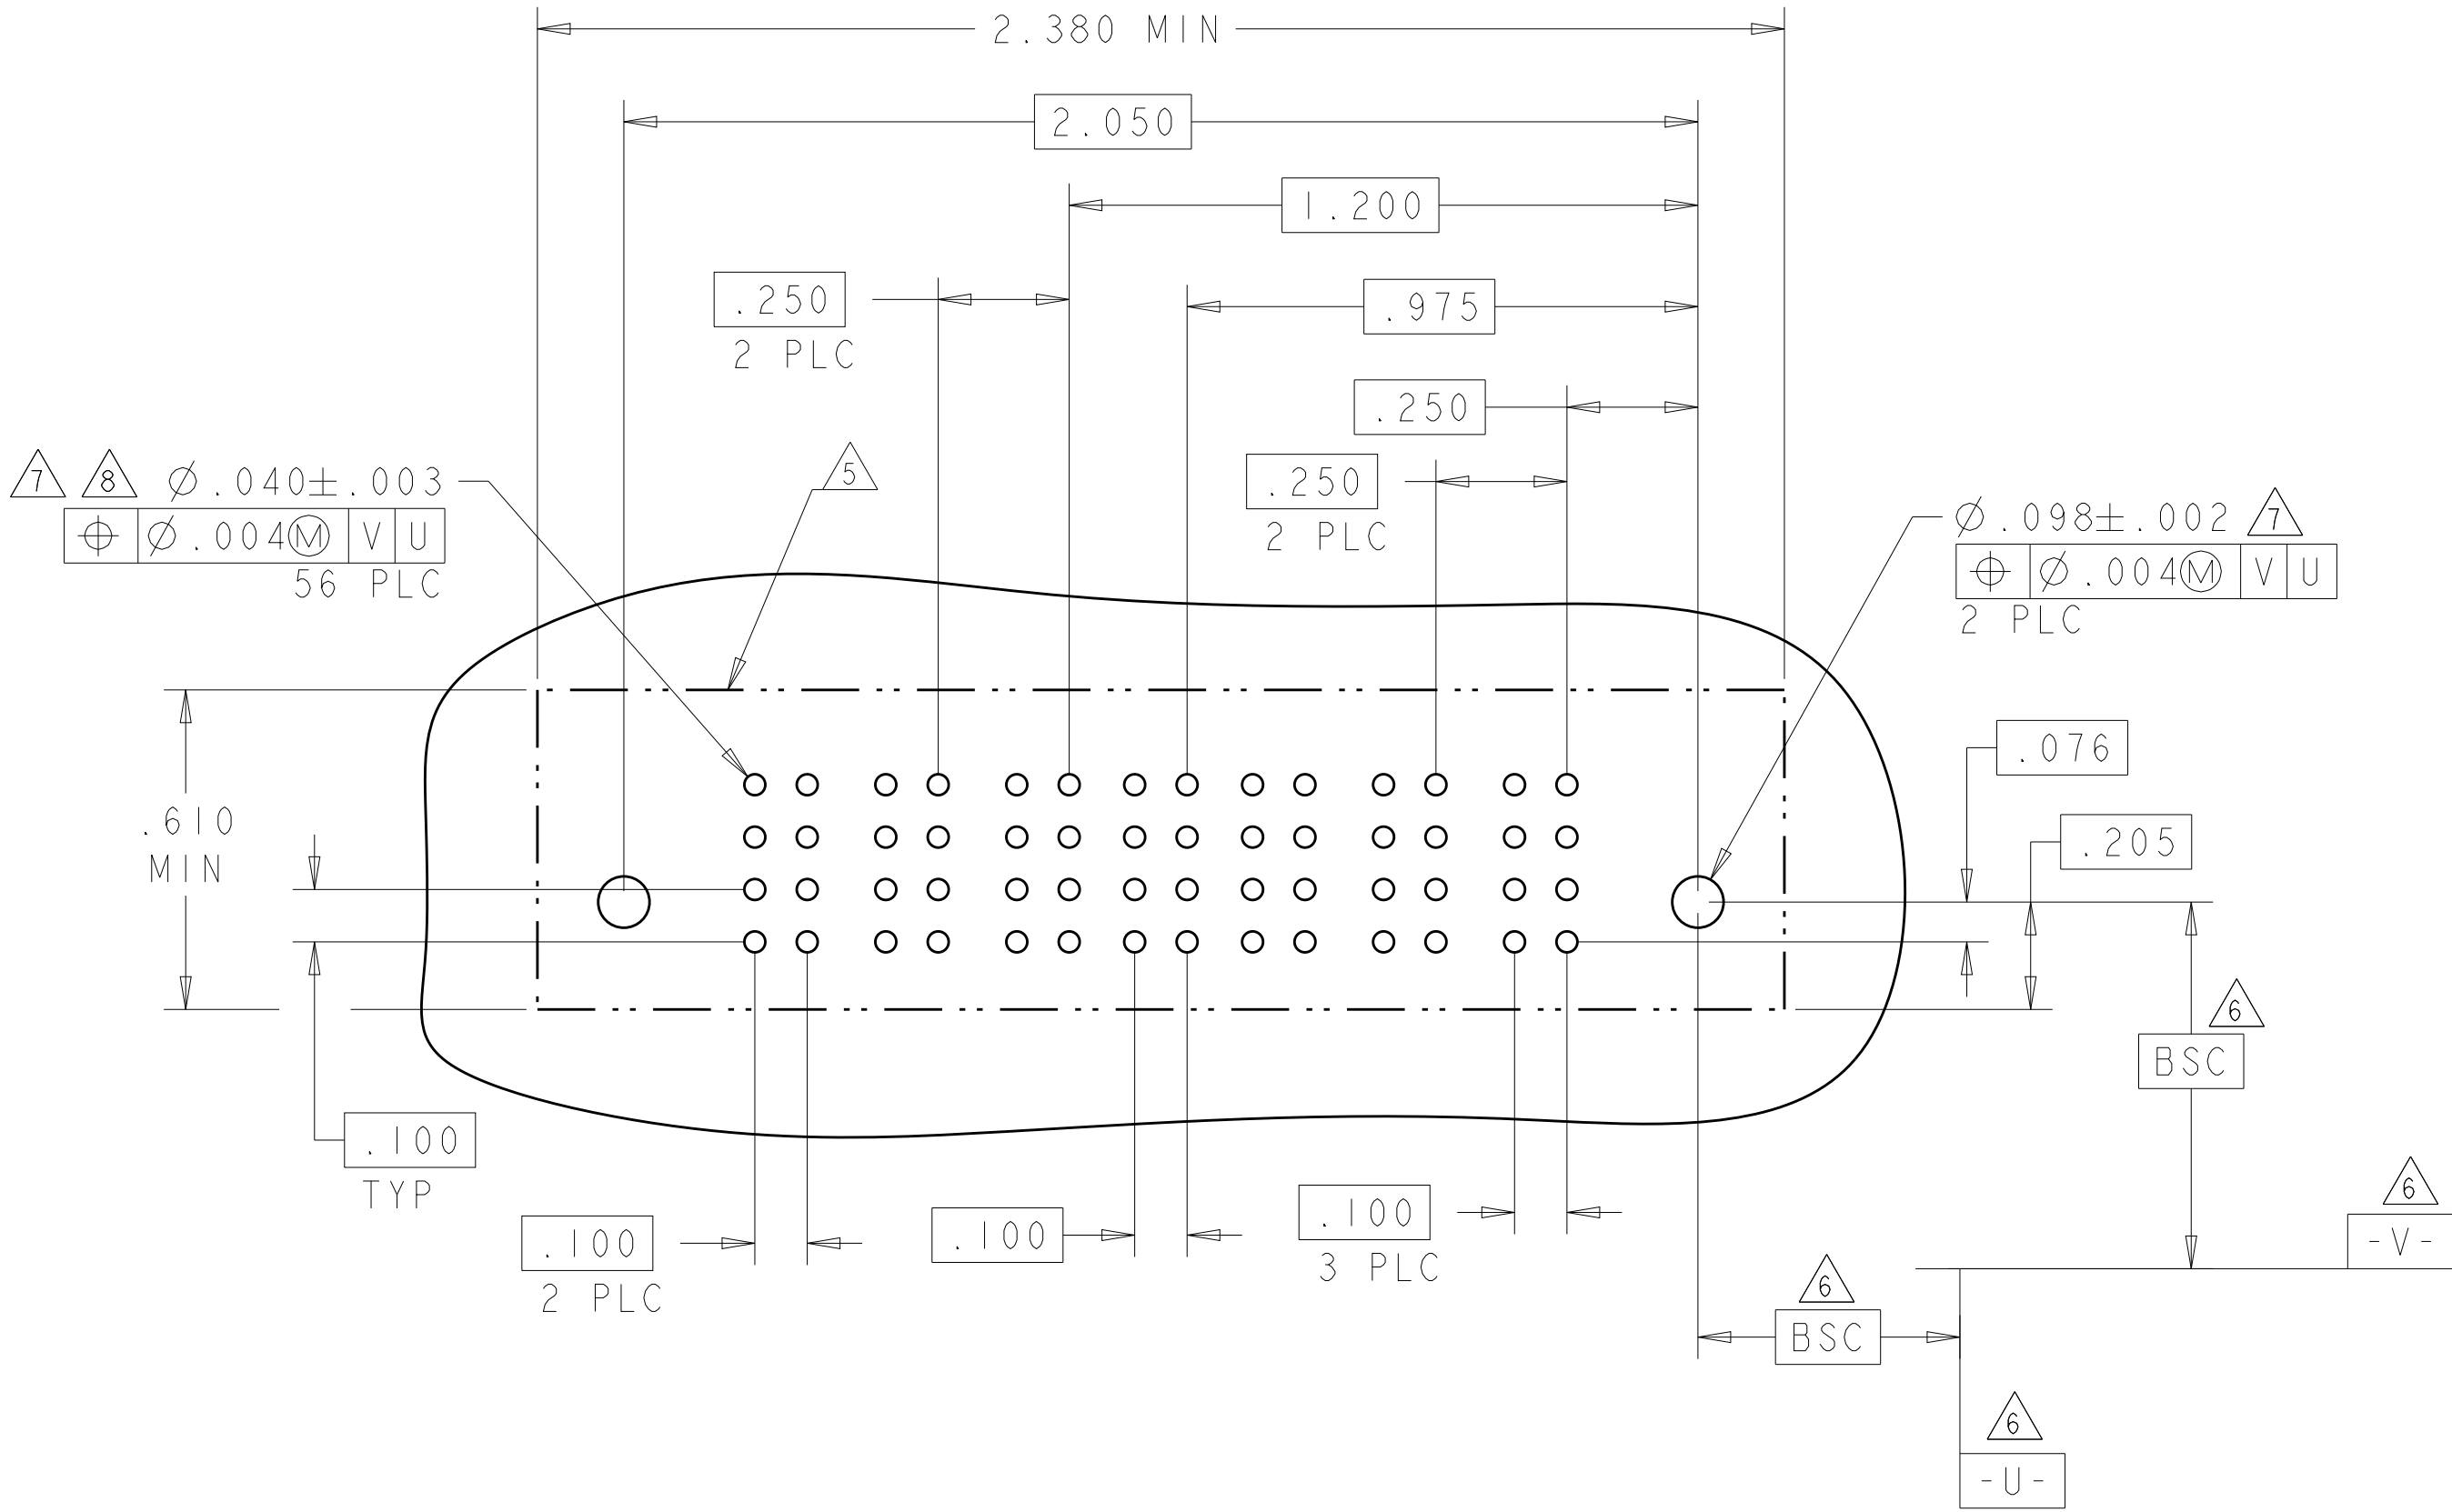


PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P4	P3	6	5	4	3	2	1	P2	P1			
5-6450540-9	D C B A					AP	AP	AP	AP	AP	AP	AP			
						AP	AP	AP	AP	AP	AP	AP			
						AP	AP	AP	AP	AP	AP	AP			
						AP	AP	AP	AP	AP	AP	AP			
2P + 24S + 2P															

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET I	-	-	-


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 29APR05	TE Connectivity	
DIMENSIONS: INCHES		CHK M.PERCHERKE 29APR05		
		APVD M.PERCHERKE	NAME	
		PRODUCT SPEC	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
MATERIAL		108-1973	SIZE	
		APPLICATION SPEC	CAGE CODE DRAWING NO	
FINISH		114-13038	RESTRICTED TO	
		WEIGHT	A100779C=6450540	
CUSTOMER DRAWING		SCALE 2:1	SHEET 14 OF 19	
			REV K9	


Ⓚ

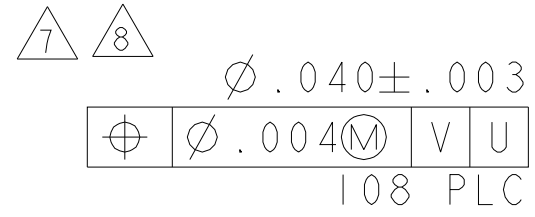4805 (3/11)


-NO SIGNAL CONTACTS4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL					POWER																								
			P2	5	4	3	2	1	P1																									
6-6450540-2	D C B A	 	<table><tr><td rowspan="4">GP</td><td></td><td>AP</td><td>AP</td><td>AP</td><td></td><td rowspan="4">GP</td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr></table>									GP		AP	AP	AP		GP		AP	AP	AP			AP	AP	AP			AP	AP	AP		 
GP		AP	AP	AP		GP																												
		AP	AP	AP																														
		AP	AP	AP																														
		AP	AP	AP																														
IP + 20S + IP																																		

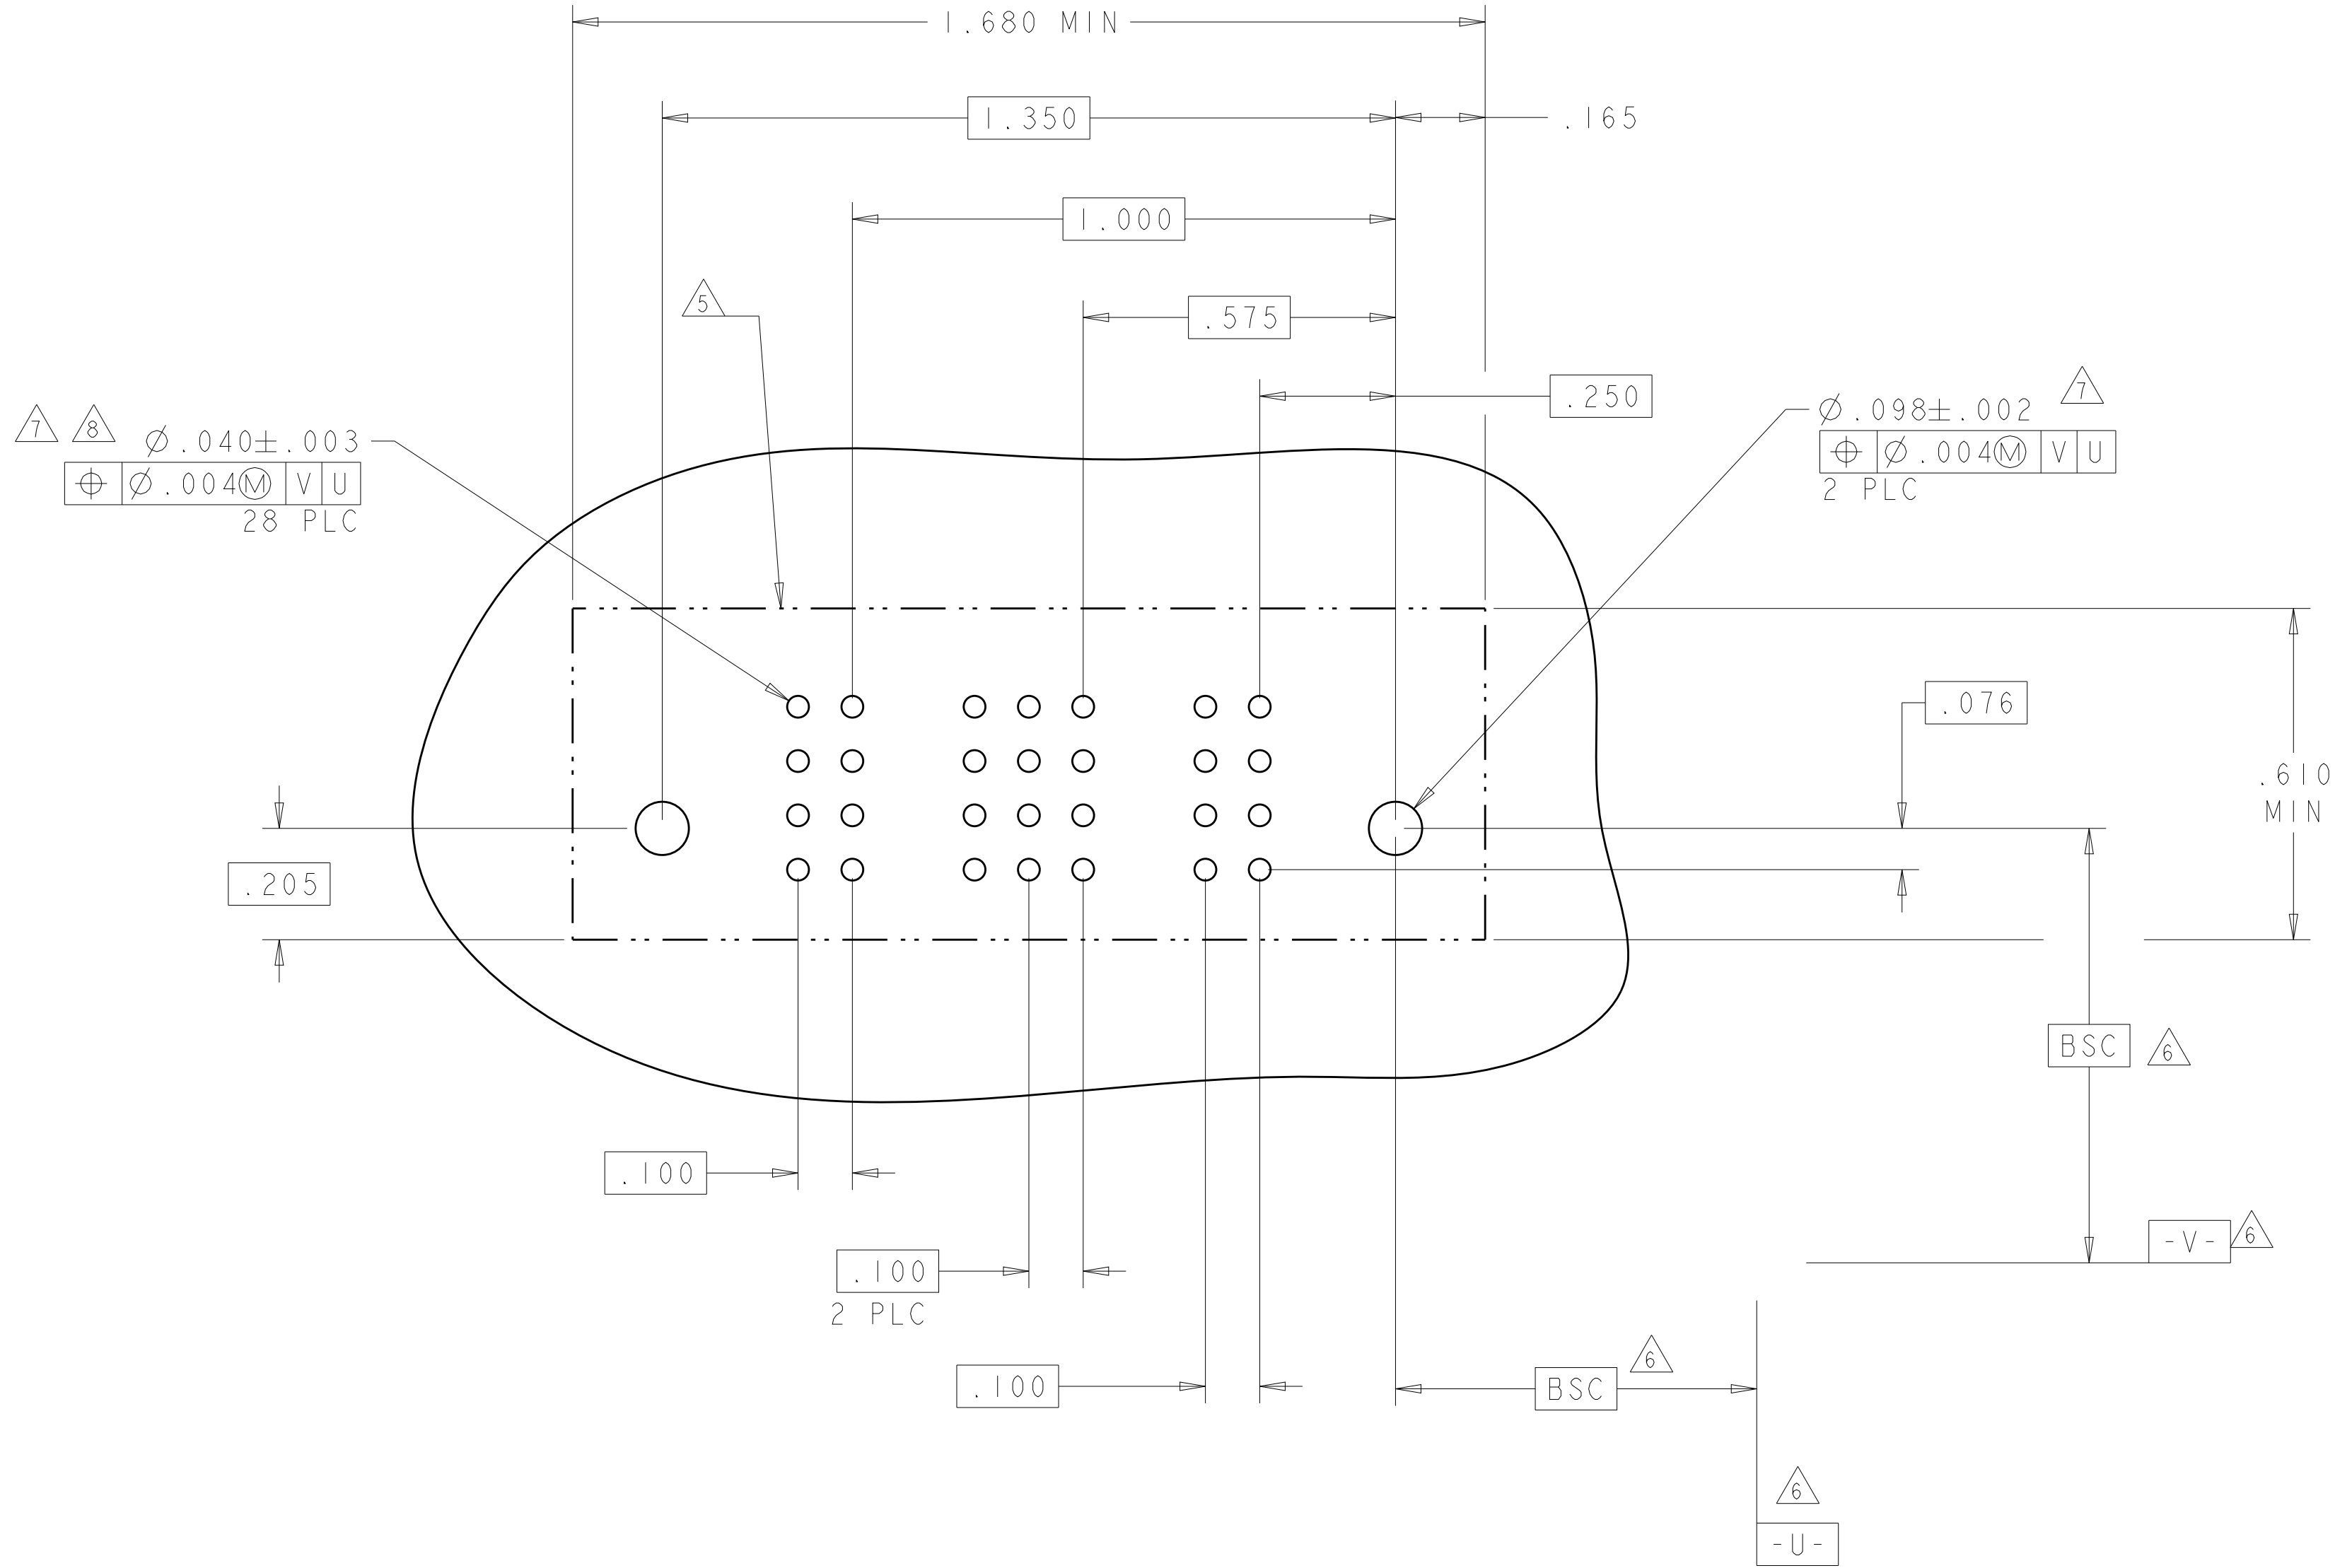

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS:		CHW M. PERCHERKE 29APR05			
INCHES		APVD M. PERCHERKE -		NAME	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		1 P/LC ±.01			
		2 P/LC ±.01			
		3 P/LC ±.005			
4 P/LC ±.0020		PRODUCT SPEC		SIZE	
ANGLES ±.7°		APPLICATION SPEC		CAGE CODE	
FINISH		108-1973		DRAWING NO	
MATERIAL		114-13038		RESTRICTED TO	
		WEIGHT -		A 00779 © 6450540	
		CUSTOMER DRAWING		SCALE 2:1	
				SHEET 17 OF 19	
				REV K9	



PART NUMBER	ROWS		POWER									SIGNAL								POWER								
			P16	P15	P14	P13	P12	P11	P10	P9	8	7	6	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1		
4-6450540-9	D	HD	GS	GS	GS	GS	GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS	GS	GS	GS	GS	HD		
	C										AP	AP	AP	AP	AP	AP	AP										AP	
	B										AP	AP	AP	AP	AP	AP	AP										AP	AP
	A										AP	AP	AP	AP	AP	AP	AP										AP	AP
8P + 32S + 8P																												

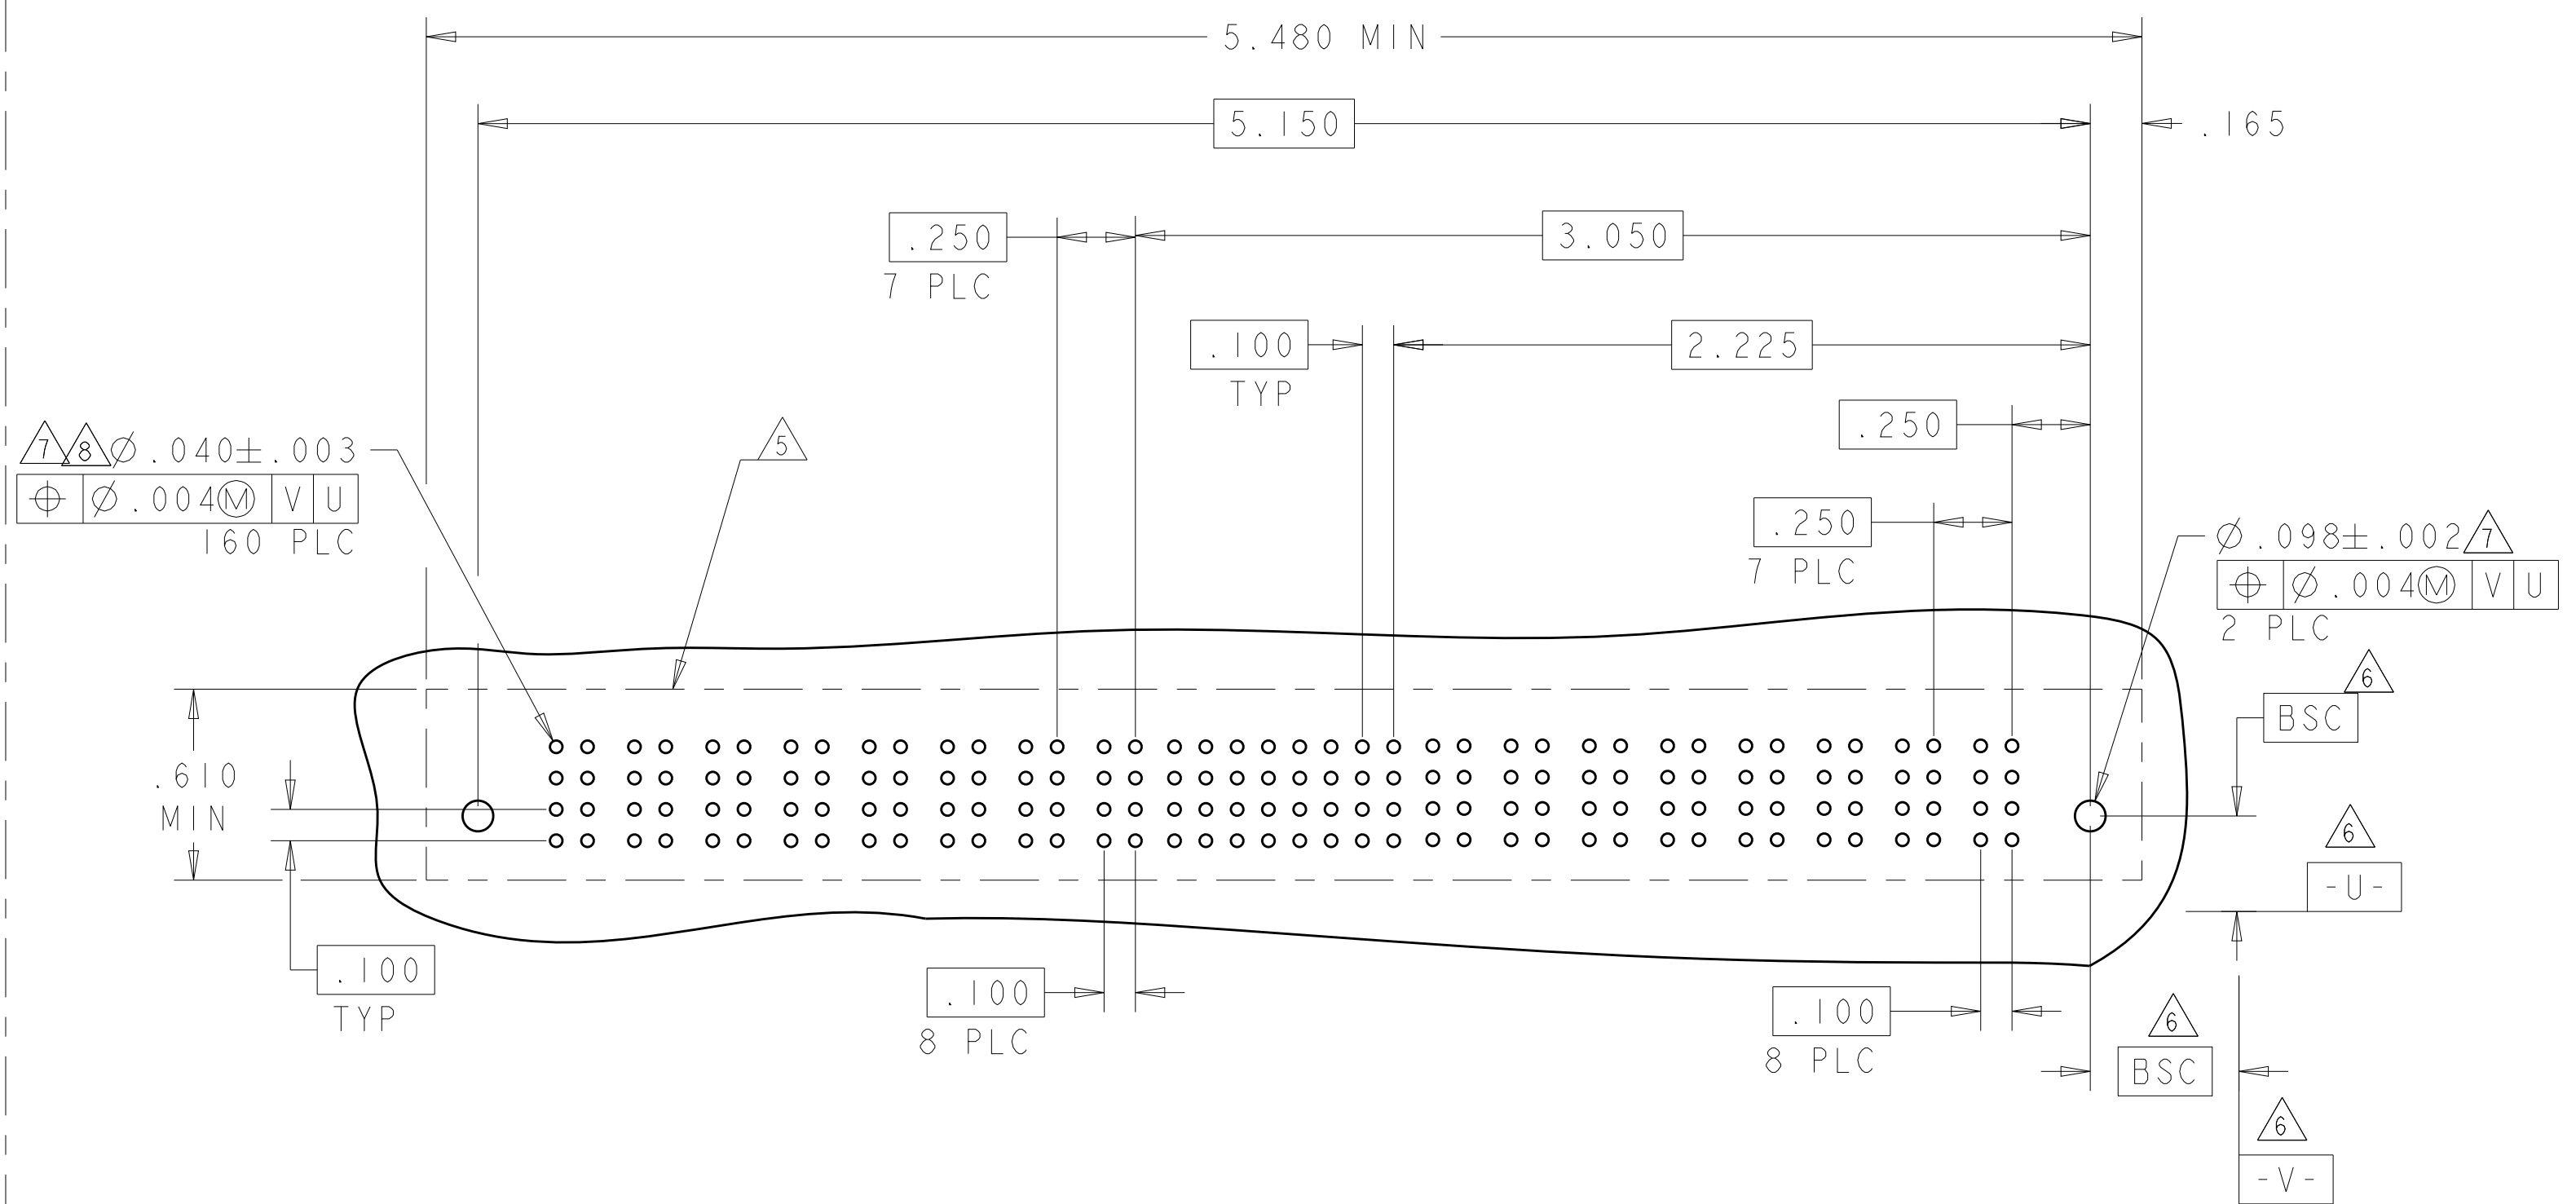4805 (3/11)

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P4	P3	6	5	4	3	2	1	P2	P1	
1-6450540-0	D C B A		GP	GP	AP	AP	AP	AP	AP	AP	GP	GP	
					AP	AP	AP	AP	AP	AP			
					AP	AP	AP	AP	AP	AP			
					AP	AP	AP	AP	AP	AP			
					2P + 24S + 2P								

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P2	5	4	3	2	1	P1		
6-6450540-6	D C B A		GS	AP	AP	AP	AP	AP	AP	GS	
				AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP		
				IP + 20S + IP							

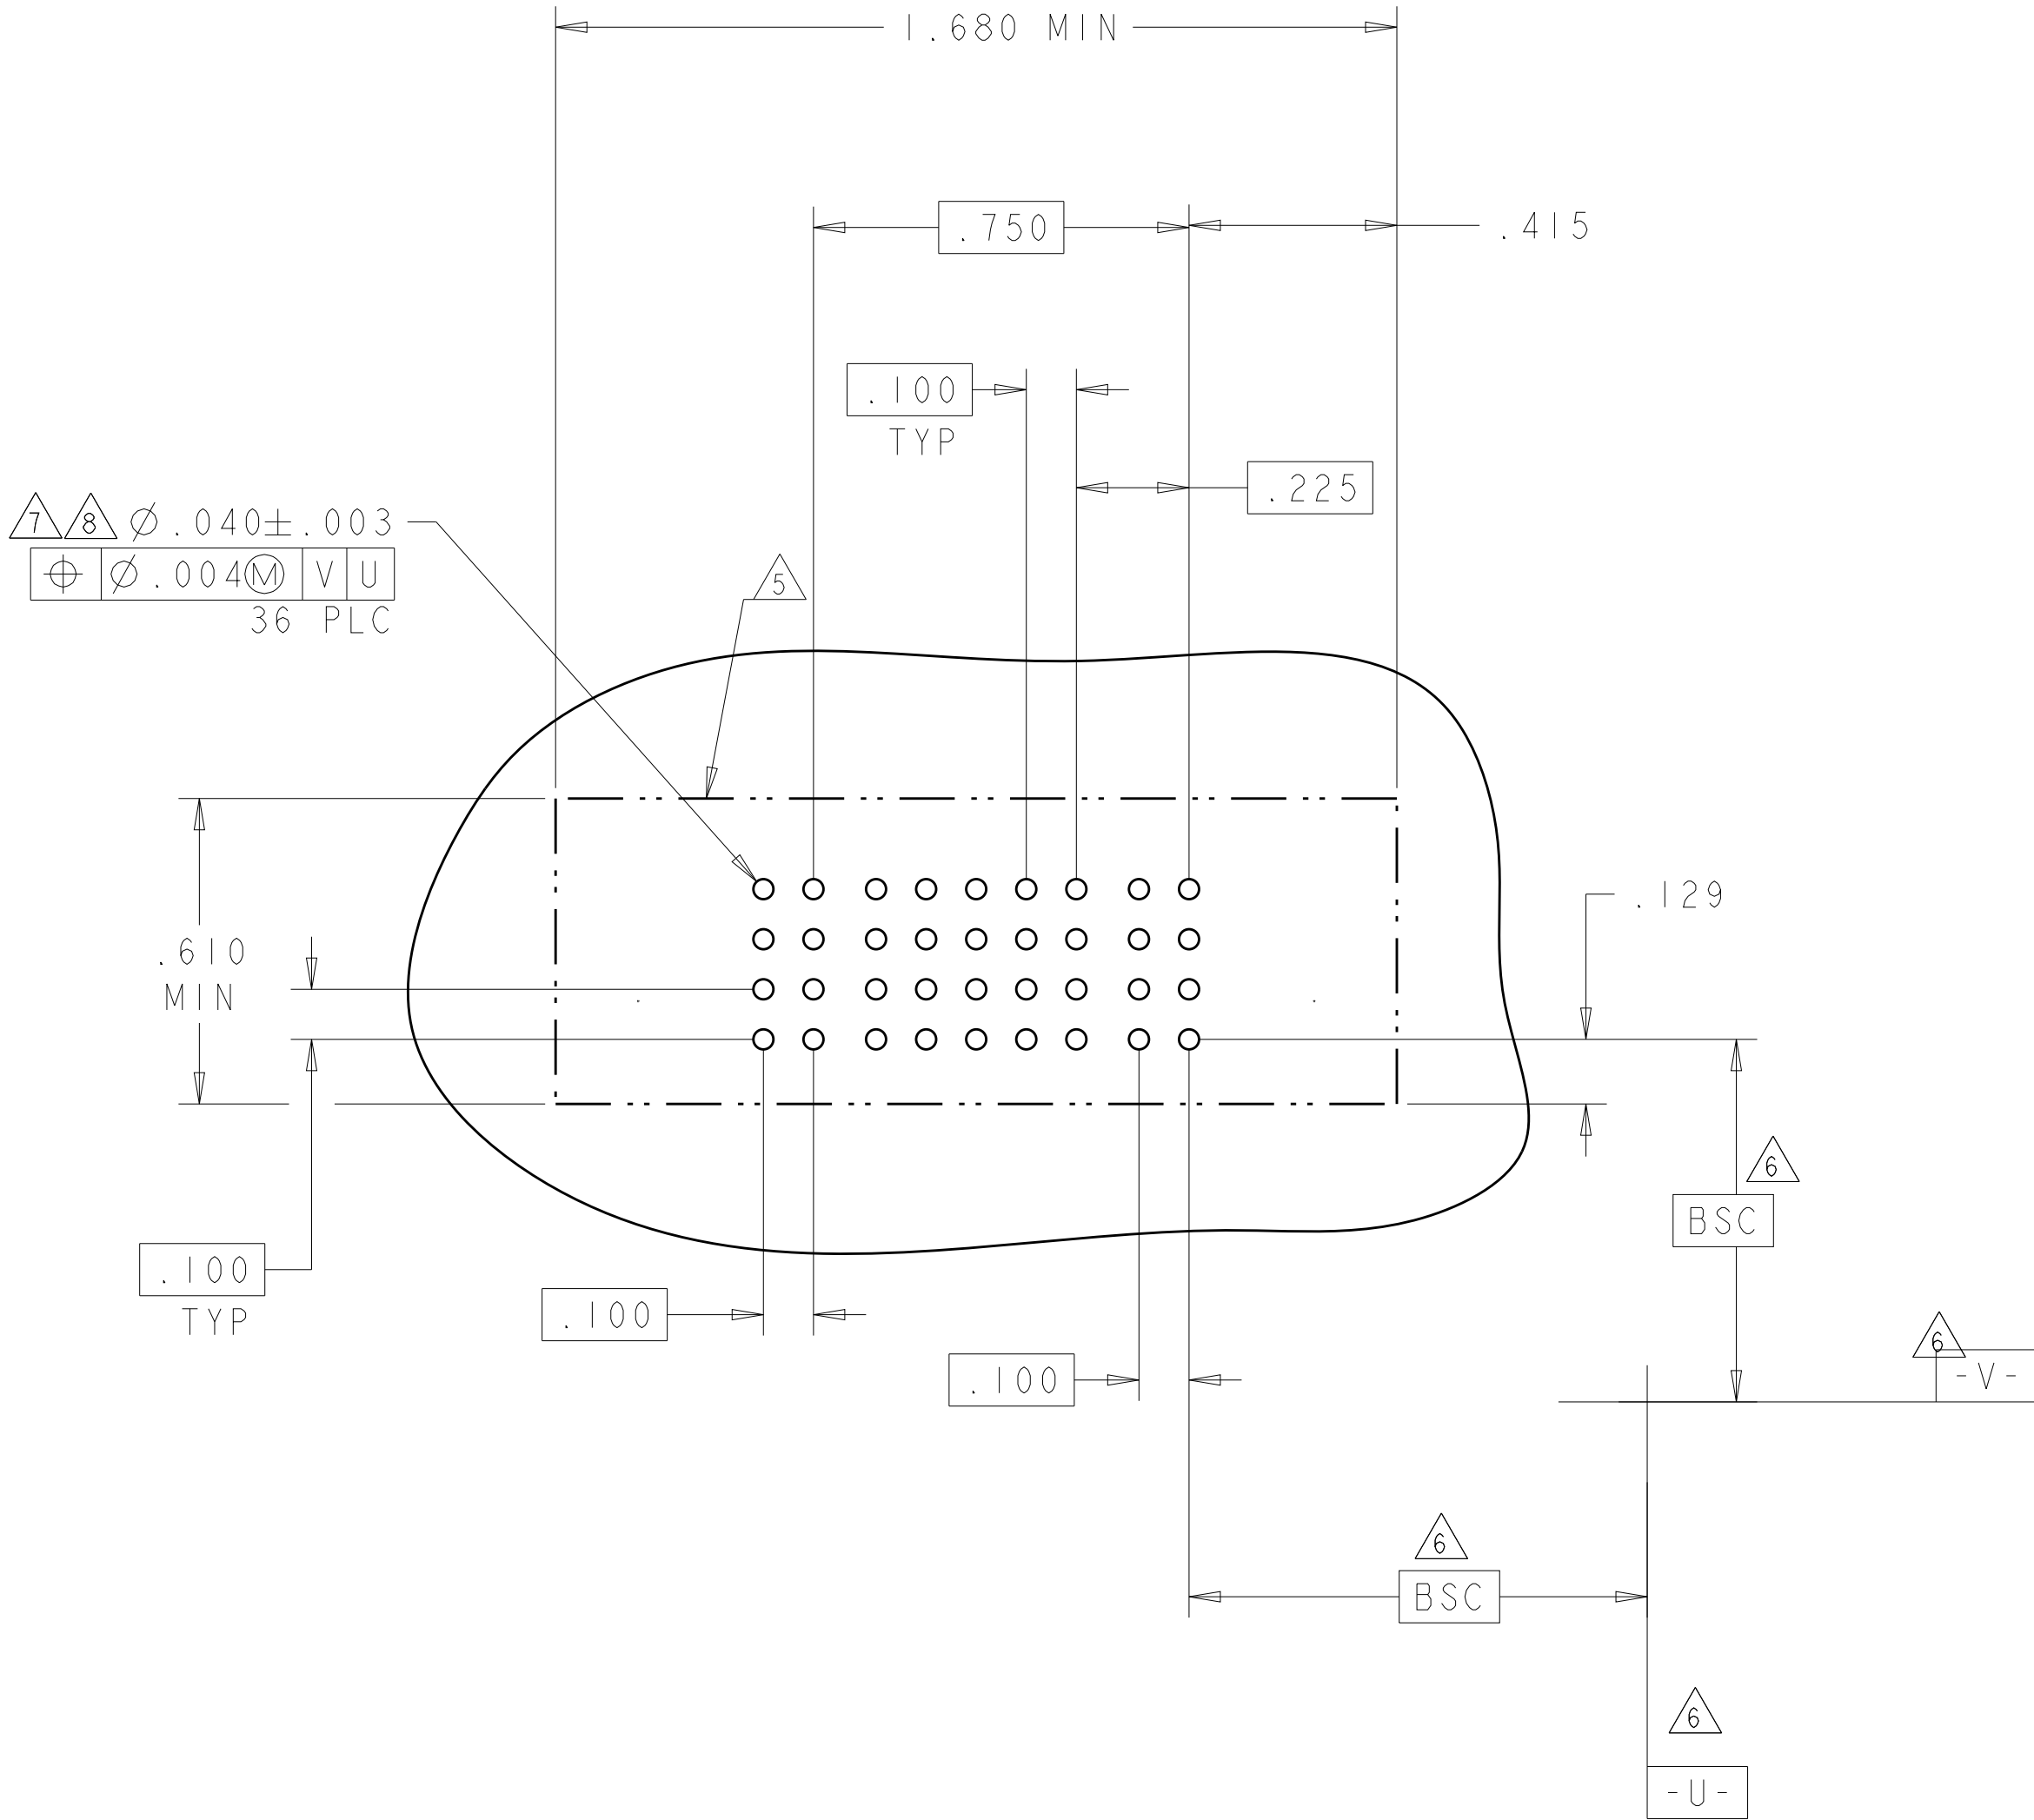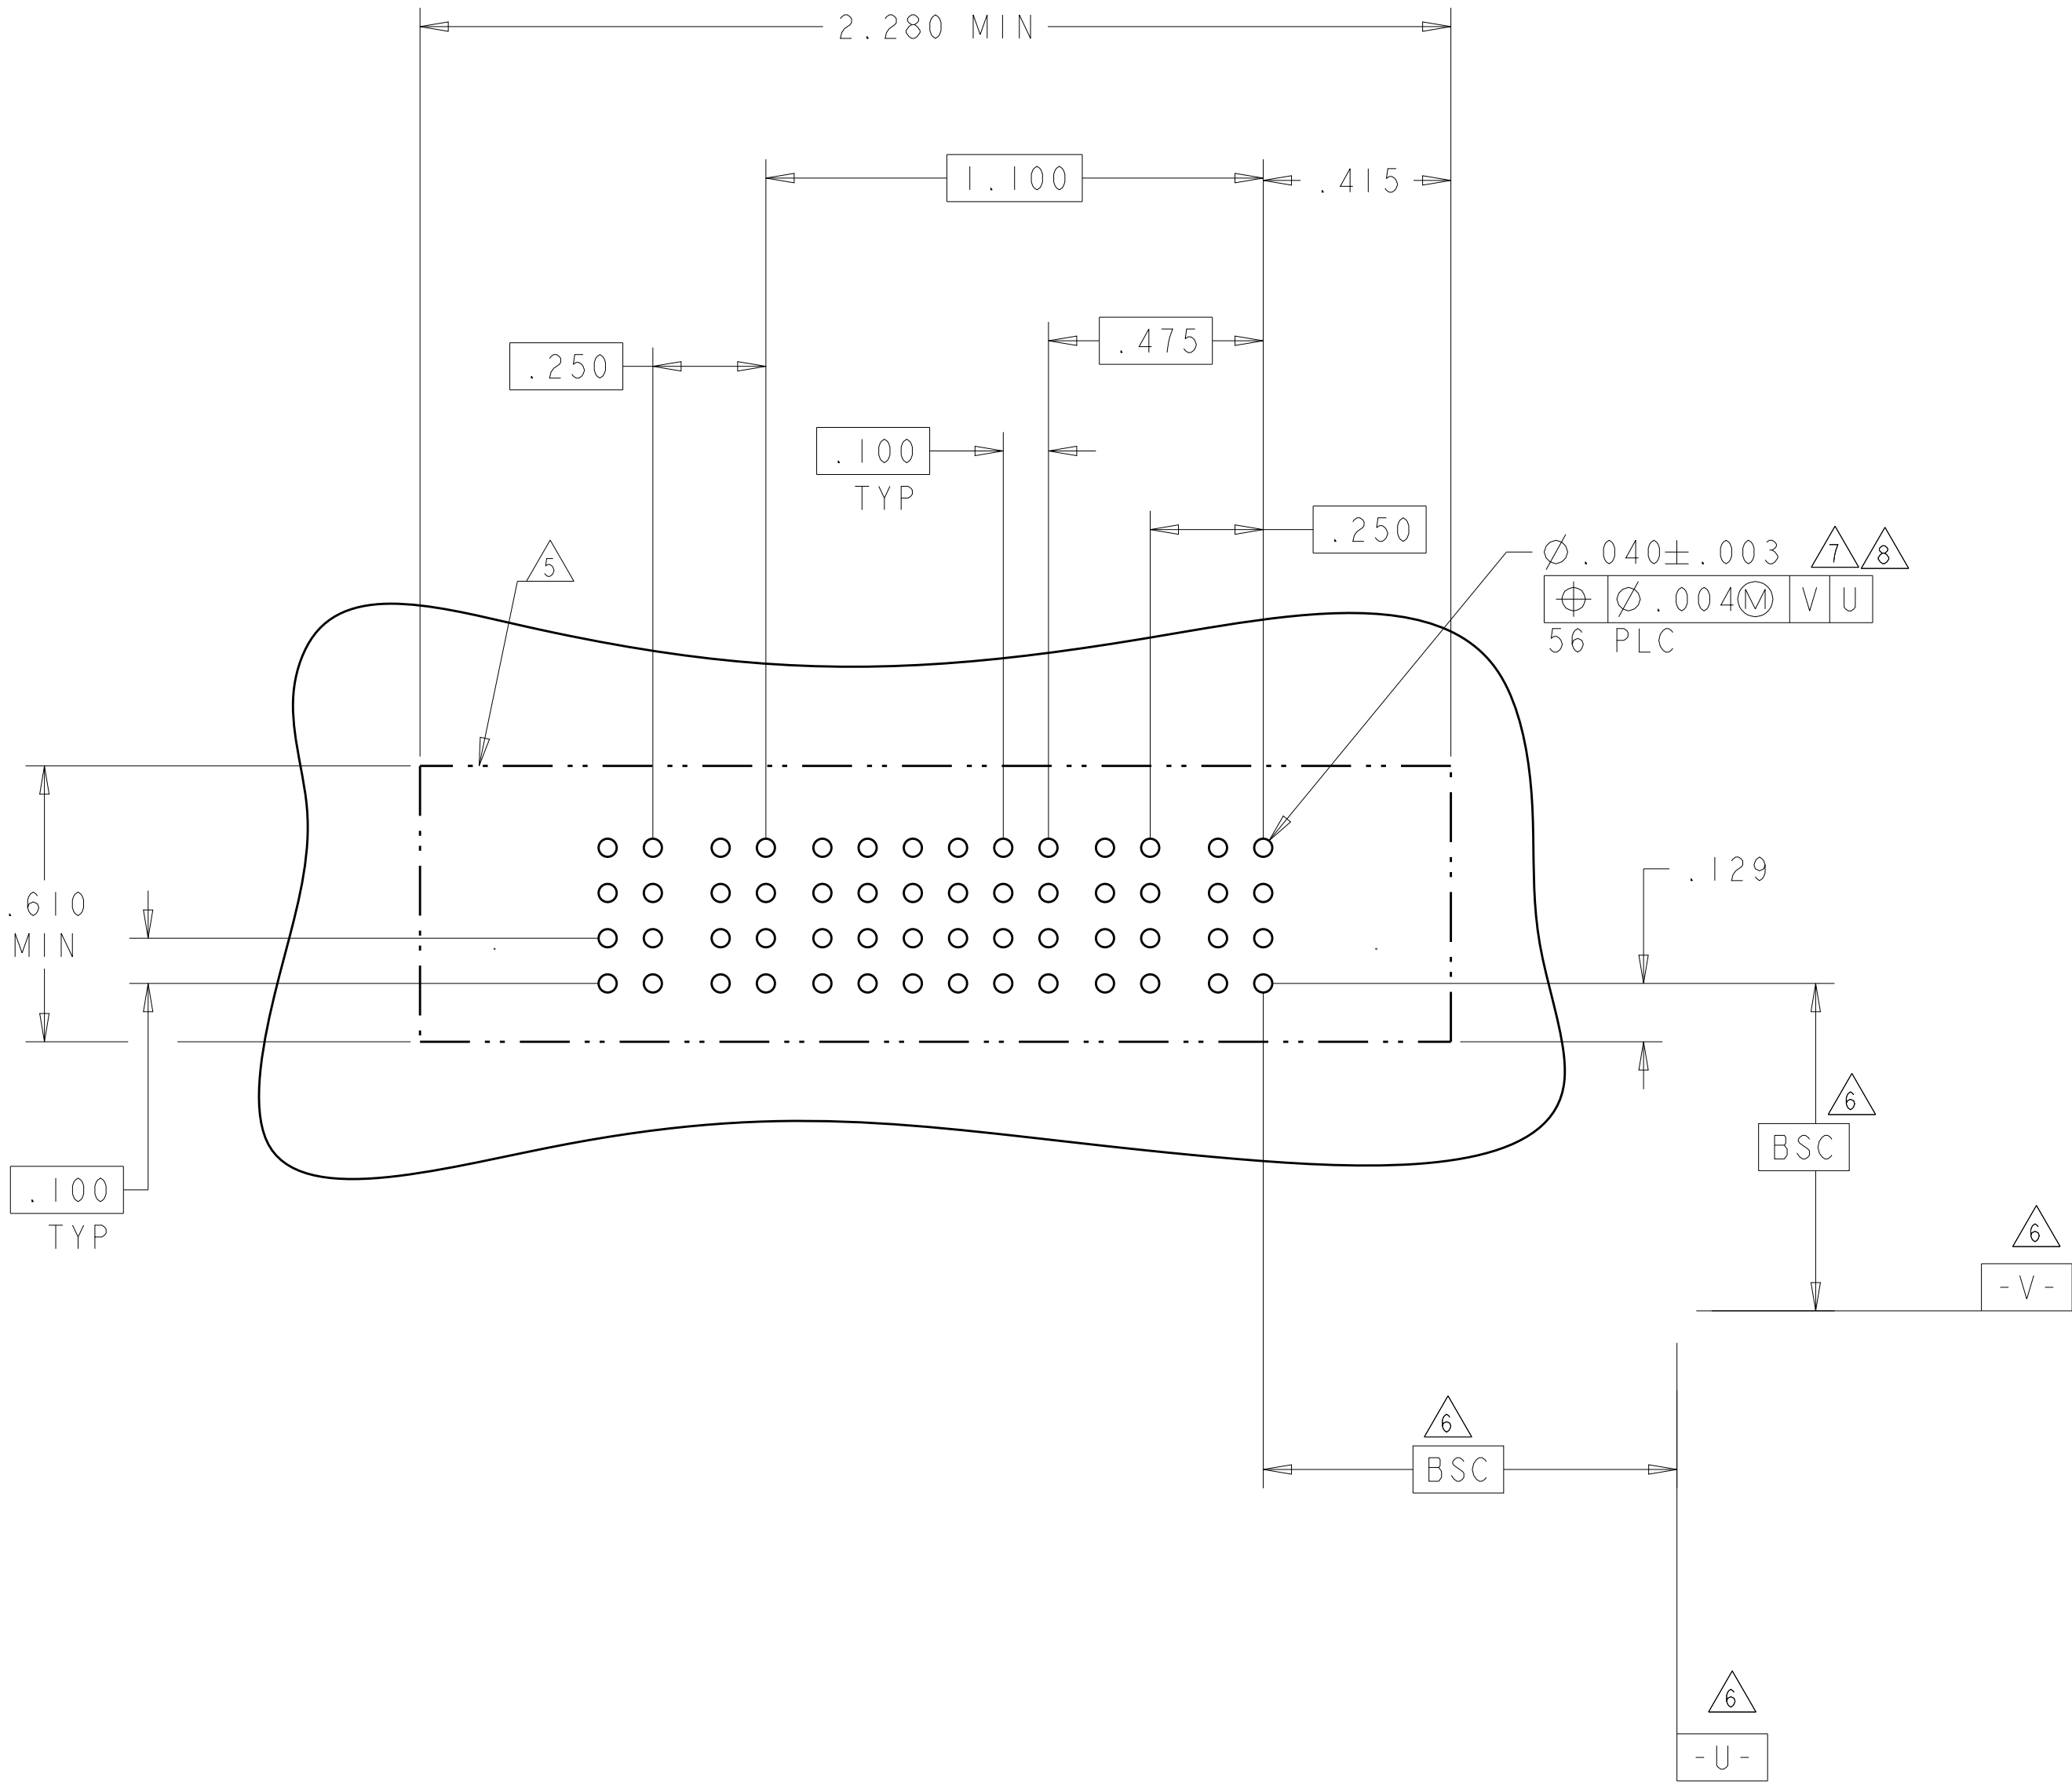

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-6450540-9](#)