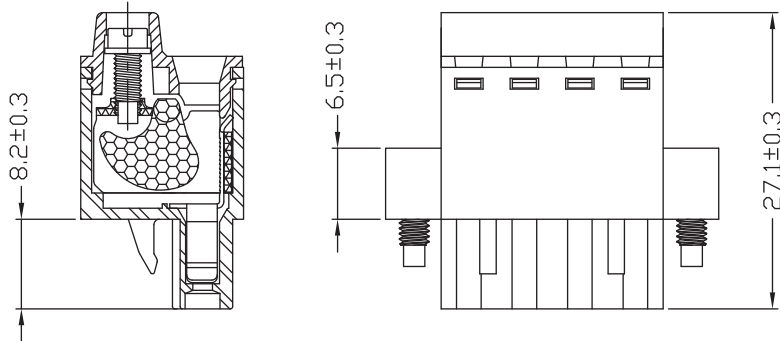
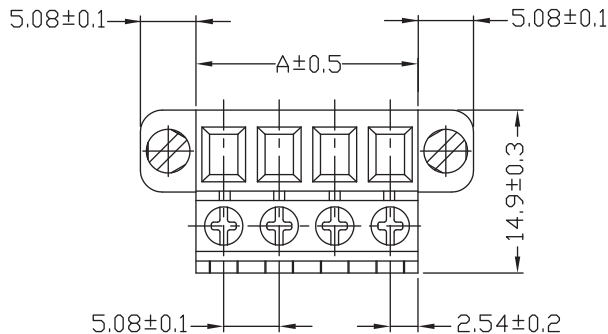



1				2				3				4				5				A																																																																																			
				<table><tr><th colspan="6">Pitch : 5.08mm(0.200inch)</th></tr><tr><th>Poles</th><th>A(mm)</th><th>A(inch)</th><th>Poles</th><th>A(mm)</th><th>A(inch)</th></tr><tr><td>2</td><td>10.16</td><td>0.400</td><td>15</td><td>76.20</td><td>3.000</td></tr><tr><td>3</td><td>15.24</td><td>0.600</td><td>16</td><td>81.28</td><td>3.200</td></tr><tr><td>4</td><td>20.32</td><td>0.800</td><td>17</td><td>86.36</td><td>3.400</td></tr><tr><td>5</td><td>25.40</td><td>1.000</td><td>18</td><td>91.44</td><td>3.600</td></tr><tr><td>6</td><td>30.48</td><td>1.200</td><td>19</td><td>96.52</td><td>3.800</td></tr><tr><td>7</td><td>35.56</td><td>1.400</td><td>20</td><td>101.60</td><td>4.000</td></tr><tr><td>8</td><td>40.64</td><td>1.600</td><td>21</td><td>106.68</td><td>4.200</td></tr><tr><td>9</td><td>45.72</td><td>1.800</td><td>22</td><td>111.76</td><td>4.400</td></tr><tr><td>10</td><td>50.80</td><td>2.000</td><td>23</td><td>116.84</td><td>4.600</td></tr><tr><td>11</td><td>55.88</td><td>2.200</td><td>24</td><td>121.92</td><td>4.800</td></tr><tr><td>12</td><td>60.96</td><td>2.400</td><td></td><td></td><td></td></tr><tr><td>13</td><td>66.04</td><td>2.600</td><td></td><td></td><td></td></tr><tr><td>14</td><td>71.12</td><td>2.800</td><td></td><td></td><td></td></tr></table>				Pitch : 5.08mm(0.200inch)						Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)		2	10.16	0.400	15	76.20	3.000	3	15.24	0.600	16	81.28	3.200	4	20.32	0.800	17	86.36	3.400	5	25.40	1.000	18	91.44	3.600	6	30.48	1.200	19	96.52	3.800	7	35.56	1.400	20	101.60	4.000	8	40.64	1.600	21	106.68	4.200	9	45.72	1.800	22	111.76	4.400	10	50.80	2.000	23	116.84	4.600	11	55.88	2.200	24	121.92	4.800	12	60.96	2.400				13	66.04	2.600				14	71.12	2.800				TECHNICAL CHARACTERISTICS MATERIAL INSULATOR: PA 66 FLAMMABILITY RATING: UL94-V0 COLOR: GREEN METAL HOUSING: STEEL ZINC PLATING TERMINAL SCREW: STEEL ZINC PLATING TERMINAL SCREW SLOT TYPE: "+/-" WIRE GUARD: PhBz STEEL ZINC PLATING FLANGES SCREW: STEEL M2.5 ENVIRONMENTAL OPERATING TEMPERATURE: -40 UP TO 105°C COMPLIANCE: LEAD FREE AND ROHS ELECTRICAL CURRENT RATING: cULus 16 A VDE 16 A WORKING VOLTAGE: 300 VAC 250 VAC WITHSTANDING VOLTAGE: 2 KV 2 KV CONTACT RESISTANCE: 20 mOhm max STANDARD ULus CERTIFIED E315414 VDE CERTIFIED 40038804 MECHANICAL SOLID WIRE: 24-12 AWG / 0.205-3.31 MM² STRANDED WIRE: 24-12 AWG / 0.205-3.31 MM² TORQUE: 4.5 Lb-In / 0.45 Nm WIRE STRIPE LENGTH: 10 MM SCREW: M2,6 PITCH: 5.08 MM PACKAGING BOX				B
Pitch : 5.08mm(0.200inch)																																																																																																							
Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)																																																																																																		
2	10.16	0.400	15	76.20	3.000																																																																																																		
3	15.24	0.600	16	81.28	3.200																																																																																																		
4	20.32	0.800	17	86.36	3.400																																																																																																		
5	25.40	1.000	18	91.44	3.600																																																																																																		
6	30.48	1.200	19	96.52	3.800																																																																																																		
7	35.56	1.400	20	101.60	4.000																																																																																																		
8	40.64	1.600	21	106.68	4.200																																																																																																		
9	45.72	1.800	22	111.76	4.400																																																																																																		
10	50.80	2.000	23	116.84	4.600																																																																																																		
11	55.88	2.200	24	121.92	4.800																																																																																																		
12	60.96	2.400																																																																																																					
13	66.04	2.600																																																																																																					
14	71.12	2.800																																																																																																					
												C																																																																																											
RoHS Compliant				PROJECTION: 				GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15									D																																																																																						
G				APPROVAL: FBr				UNIT: MM				DESCRIPTION: SERIE 374B - 5.08 mm Vertical Cable Entry with Stamping Clamp & Flanges				SIZE A4																																																																																							
F								SCALE:																																																																																															
E								SHEET: 1/2				WERI PART NO: 691 374 500 0xx B																																																																																											
D	17-AUG-15	VDE	AK					DRAW: MARVIN																																																																																															
C	02-JUN-14	VDE+REF CERTIF	AS																																																																																																				
B	24-SEP-13	DRAWING REVIEW	QL																																																																																																				
A	20-JUN-12	PDF	GG																																																																																																				
REV	DATE	FILE	BY																																																																																																				

1				2				3				4				5								
Cautions and Warnings: This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.																	A							
																	B							
																	C							
																	D							
RoHS Compliant								PROJECTION: 				GENERAL TOLERANCE 				DESCRIPTION: DISCLAIMER WERI PART NO: DISCLAIMER				SIZE A4				
G				APPROVAL: JC																	UNIT: MM			
F																					SCALE:			
E																					SHEET: 2/2			
D																					DRAW: QL			
C																								
B																								
A	10-SEP-14	PDF	QL																					
REV	DATE	FILE	BY																					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Würth Electronics:

[691374500002B](#) [691374500003B](#) [691374500004B](#) [691374500005B](#) [691374500006B](#) [691374500007B](#)
[691374500008B](#) [691374500009B](#) [691374500010B](#) [691374500011B](#) [691374500012B](#)