
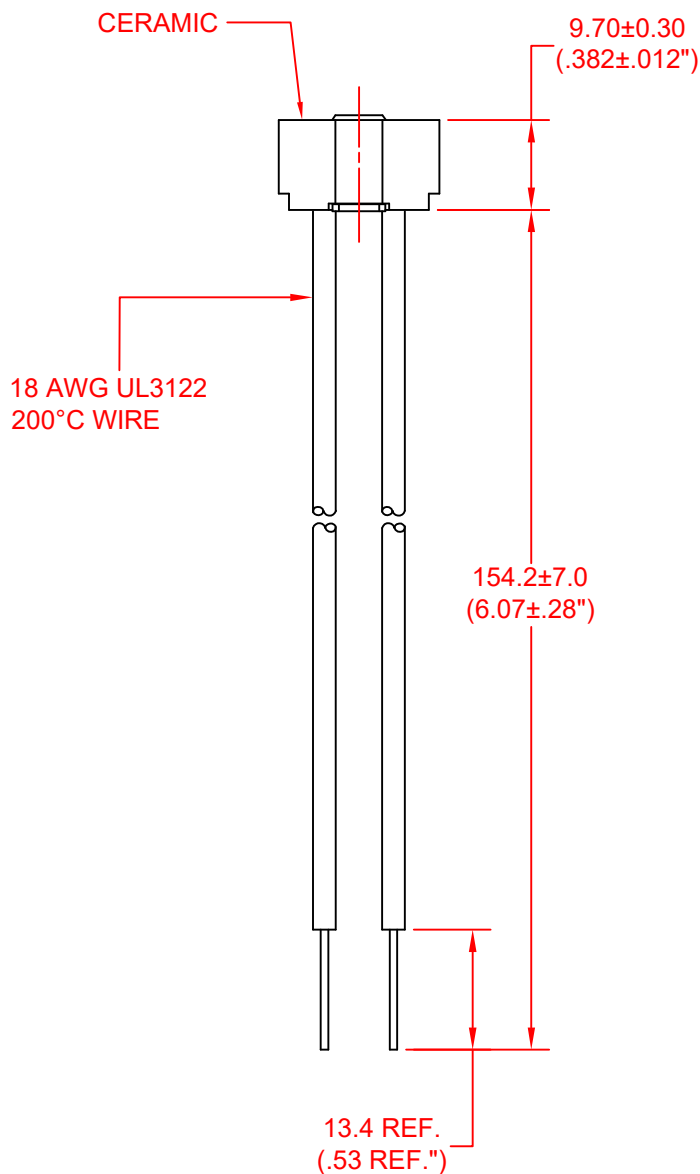
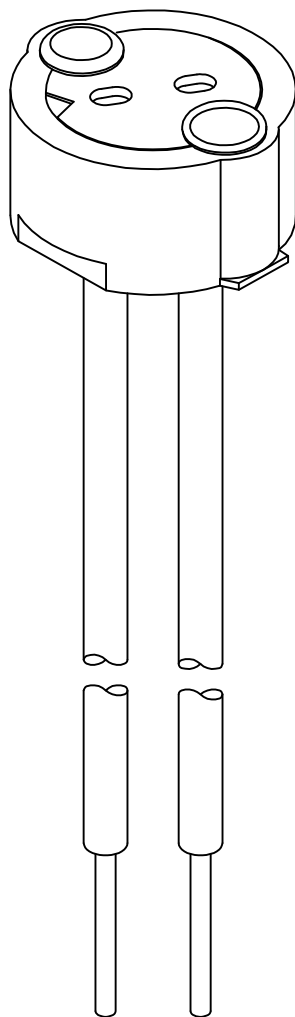


1. Electrical rating 250 Volts, 1000 Watts.
2. Use with G4, GX5.3 or G635 style lamps.
3. Contact retention force 2.0 - 4.0 lbs. per contact.
4. Two Pan Head 5-40 Screws to be supplied with each socket.

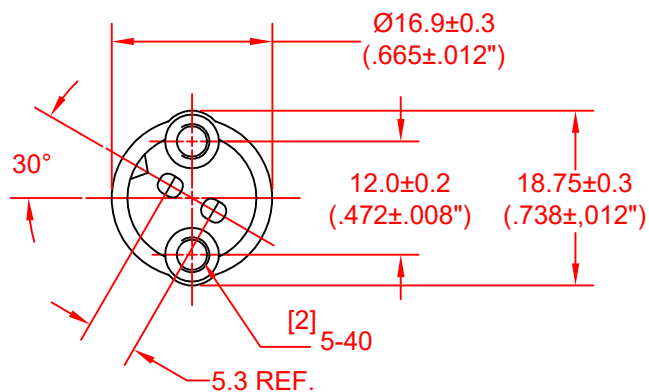

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/-		JKL COMPONENTS CORPORATION					
E	CHNG DIMS 9.70 & 154.2 TOLERANCE	8/21/18			TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE MR16 LAMP SOCKET					
D	ADD NOTE 4	11/9/17										
C	ADD NOTES	2/11/13										
B	CHANGE DIM Ø17.2±0.2 TO 16.9±0.3	1/11/11										
A	ADD PIN SPACING DIMENSION	10/31/08	DRAWN BY		APPV'D BY DATE		SIZE	FSCM NO.	DRAWING NO.			
	RELEASED	11/26/07	L. WENGSTROM		S.C. 8/21/18		A	55335	2993-G5			
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED				SCALE	NONE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
									11/26/07	8/21/18	E	1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JKL Components:](#)

[2993-G5](#)