
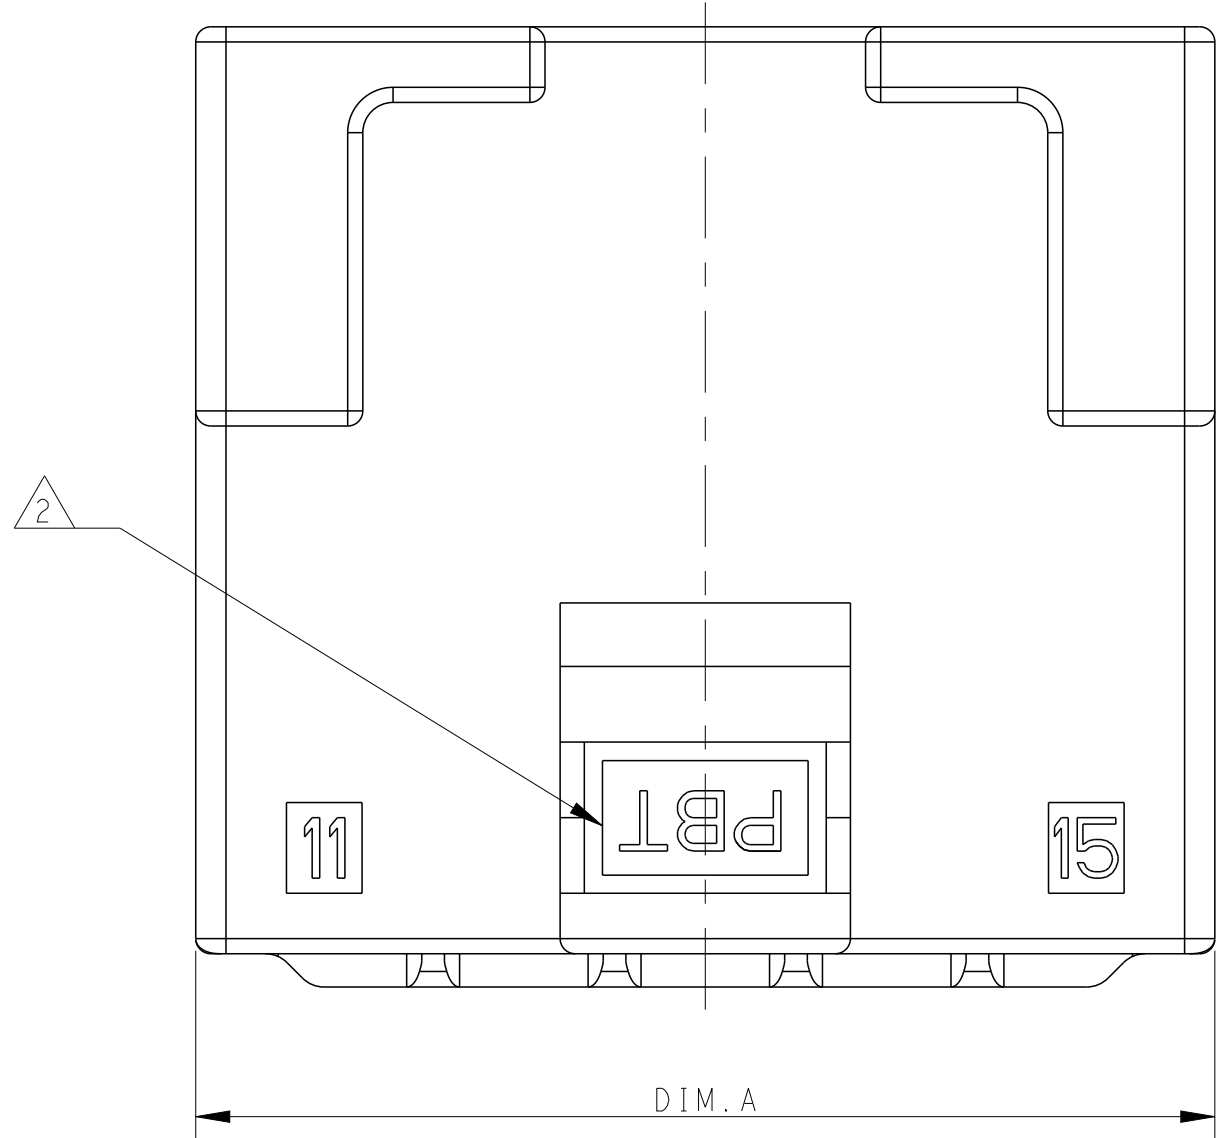
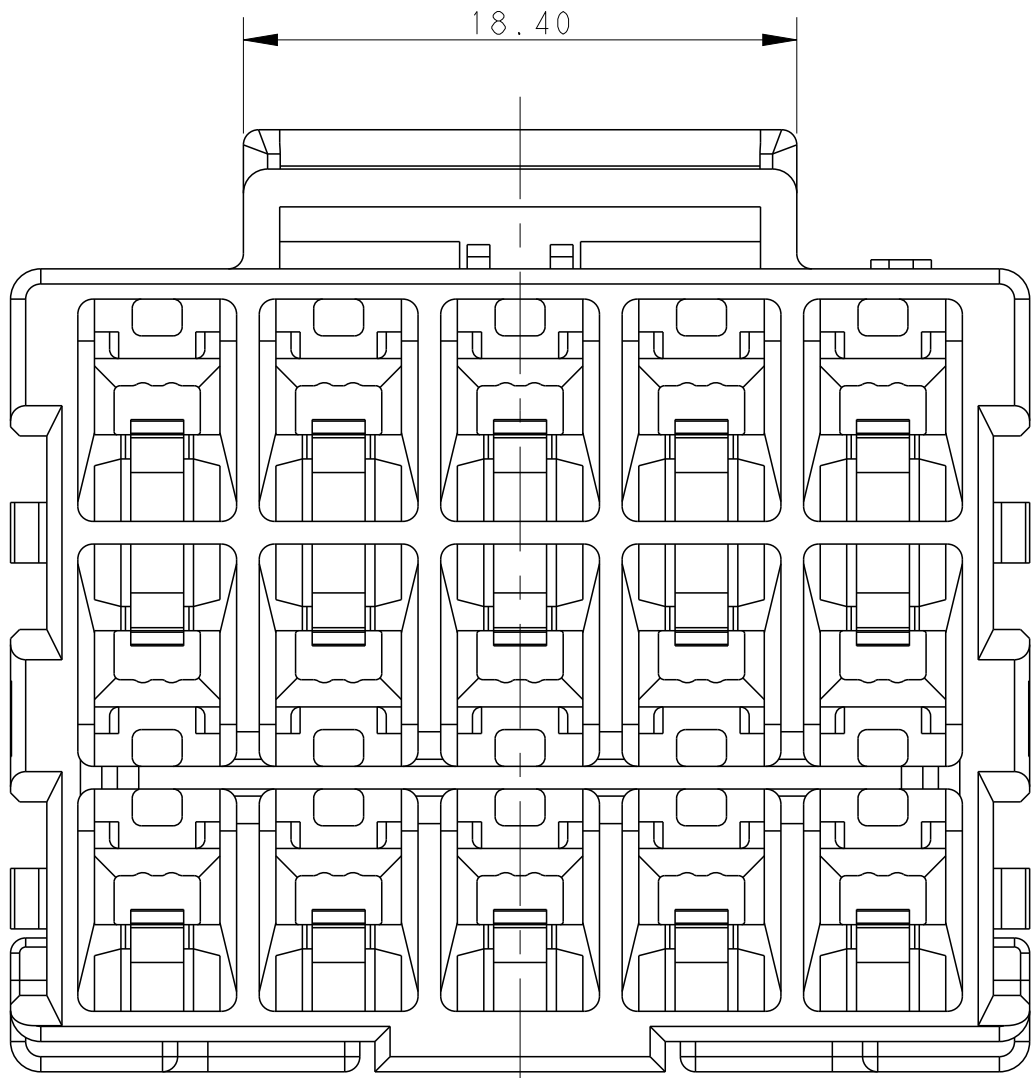
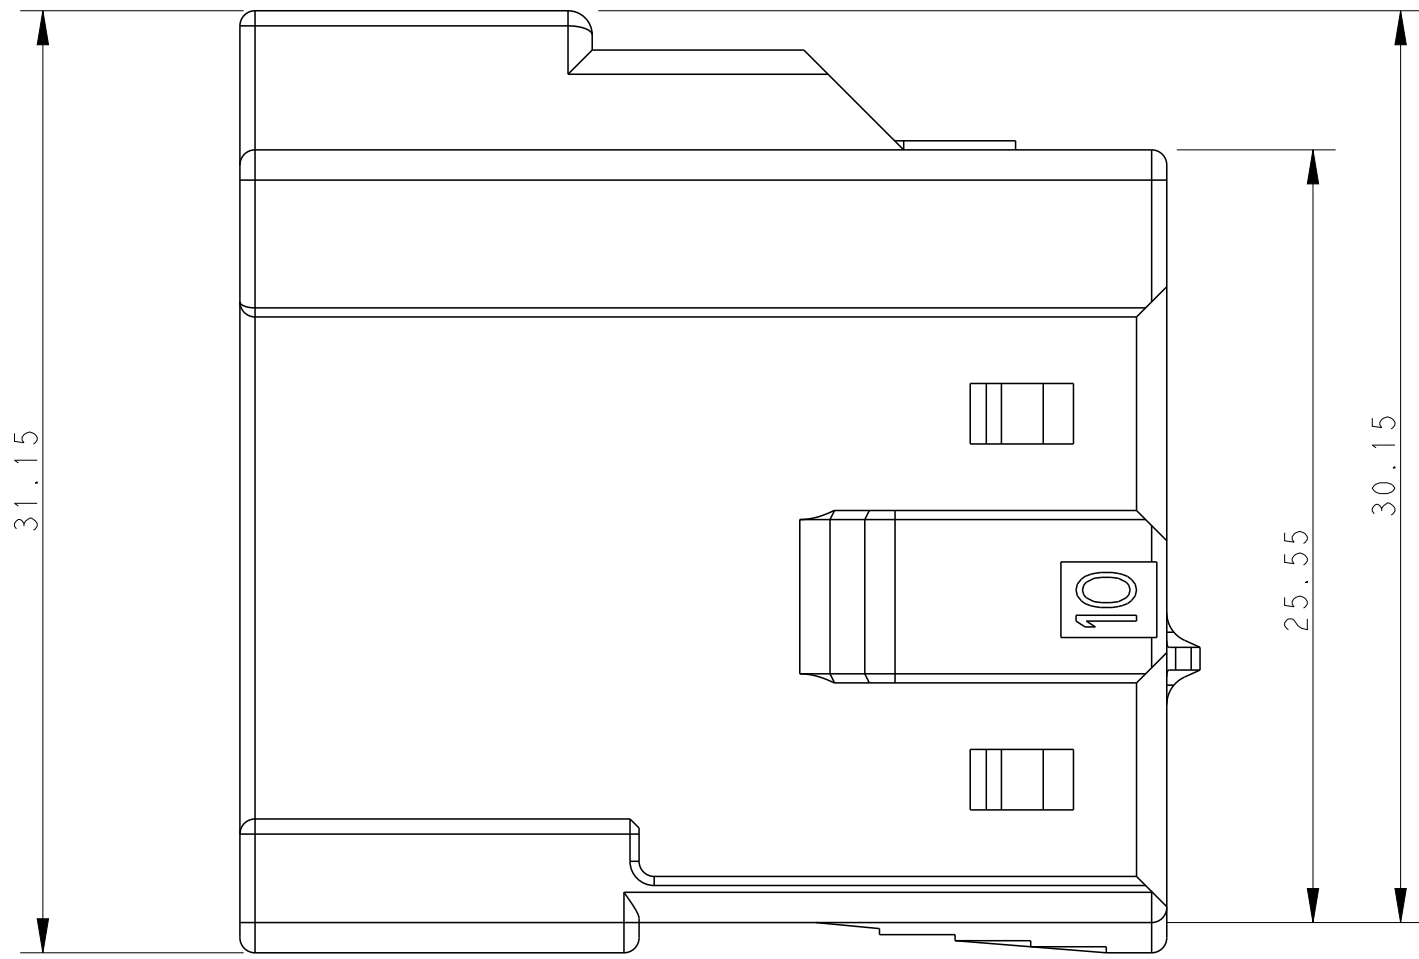
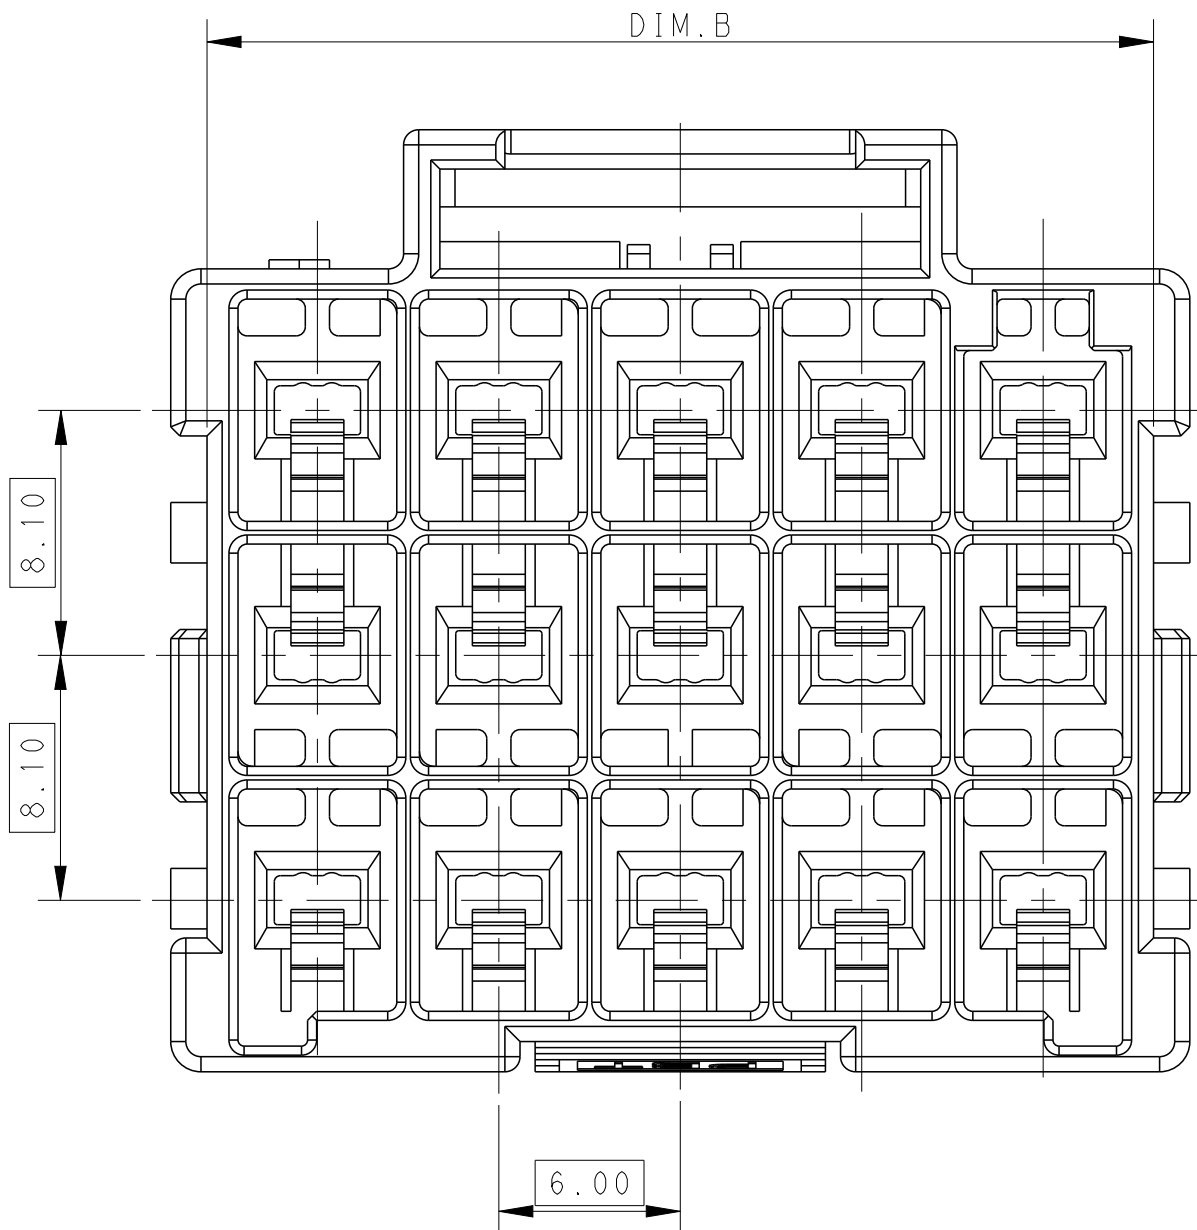


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-16-003314	15JUL2016	BW	GJ

- 1 MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2 MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT
- 3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*
- 4 MATING CONN, P/N
PLUG HSG:*-1971876-*
TPA DOUBLE ROW TPA:*-1971778-*;SINGLE ROW TPA:*-1971777-*







5 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

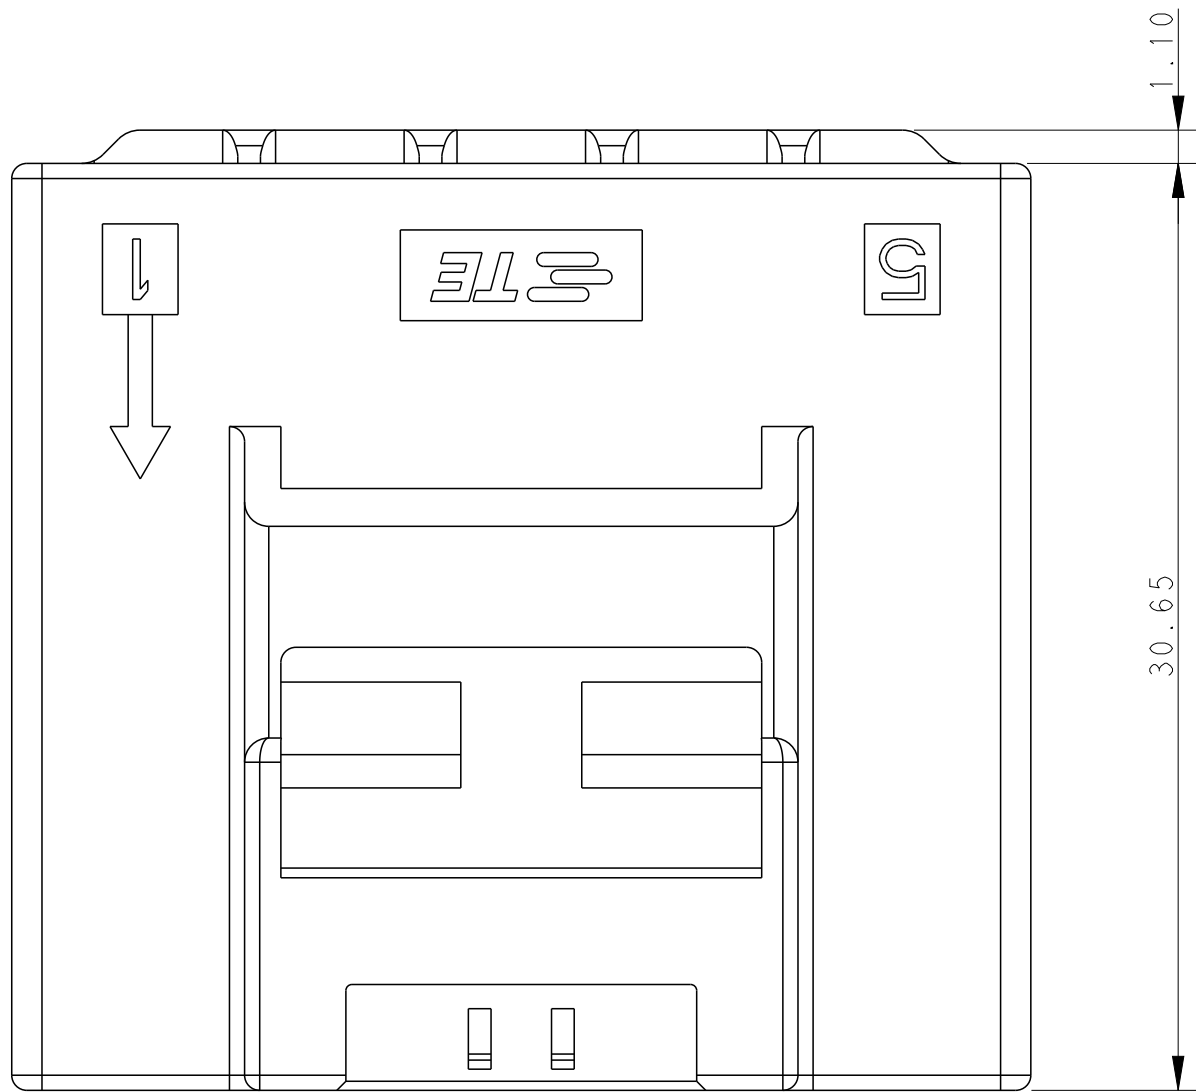

POS.	DIM.A	DIM.B
3*5	33.70	31.30
3*4	27.70	25.30
3*3	21.70	19.30

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN TOMMY_WU 09JUL2012	TE Connectivity CAP HOUSING, FREE HANGING, TRIPLE ROW POWER TRIPLE LOCK	
			CHK HAPYE_WU 09JUL2012		
			APVD YUHONG_MAO 09JUL2012		
			NAME		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
mm		0 PLC ±0.35		108-106118	
		1 PLC ±0.25		APPLICATION SPEC	
		2 PLC ±		114-106118	
		3 PLC ±		WEIGHT	
		4 PLC ±		Customer Drawing	
		ANGLES ±		SCALE	
		FINISH		SHEET 1 OF 2	
MATERIAL				REV C	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

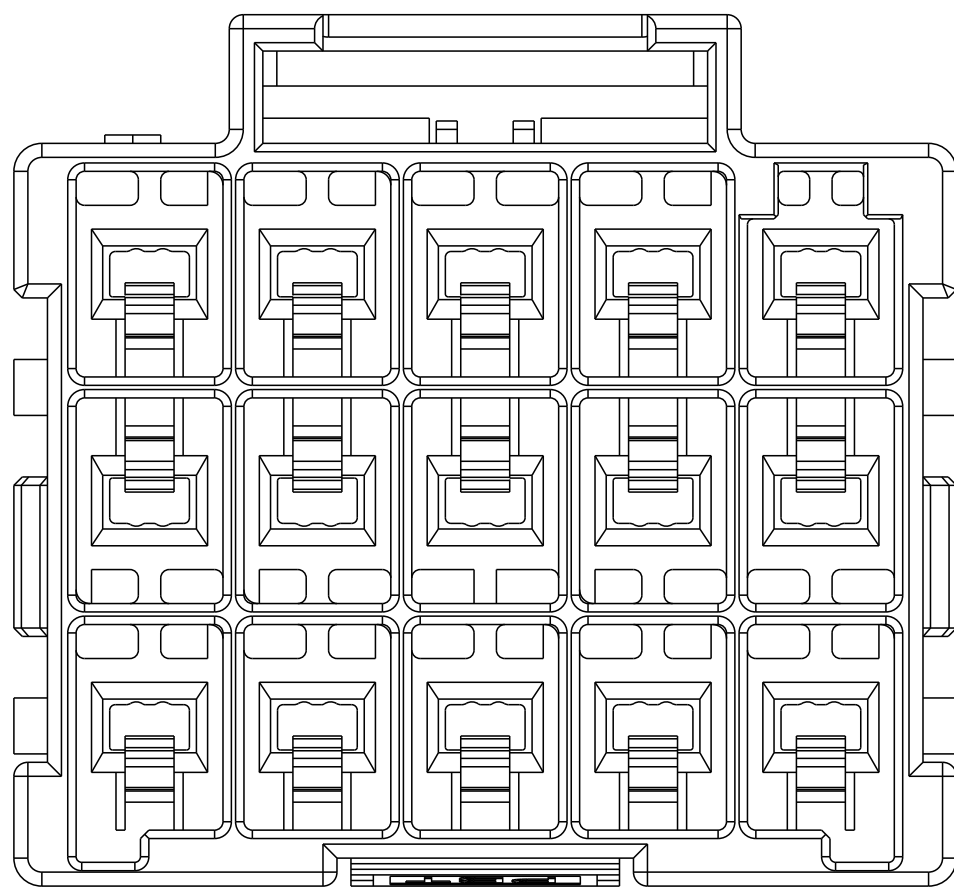
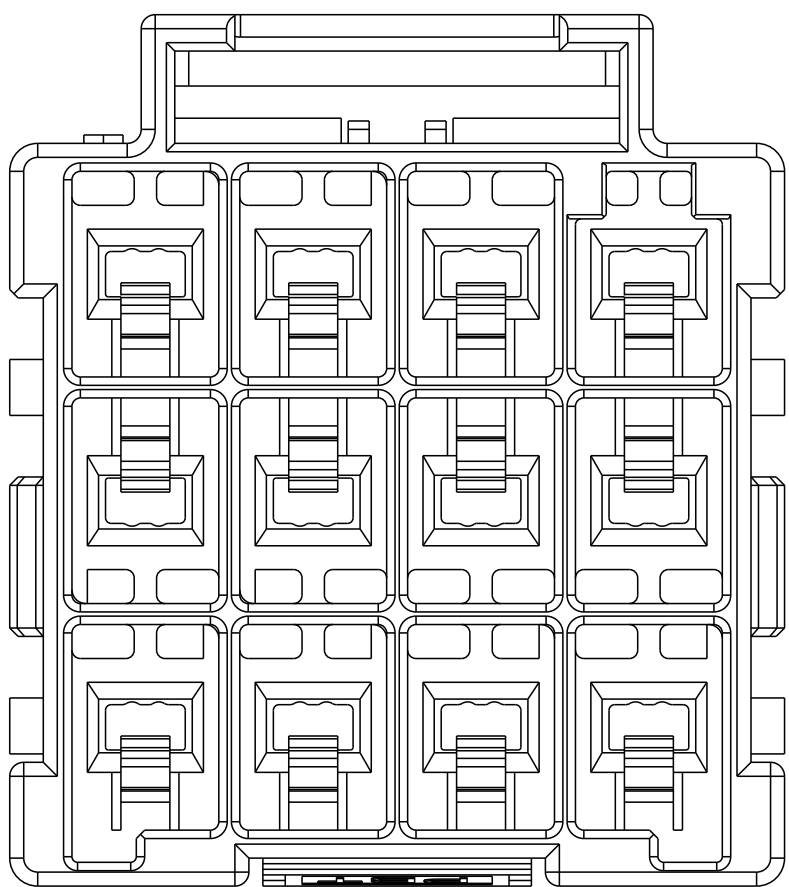
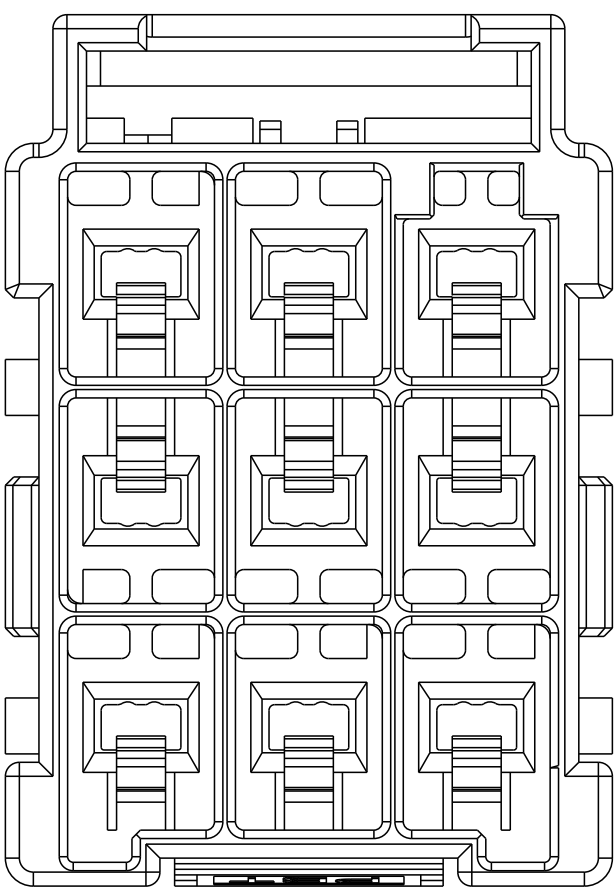
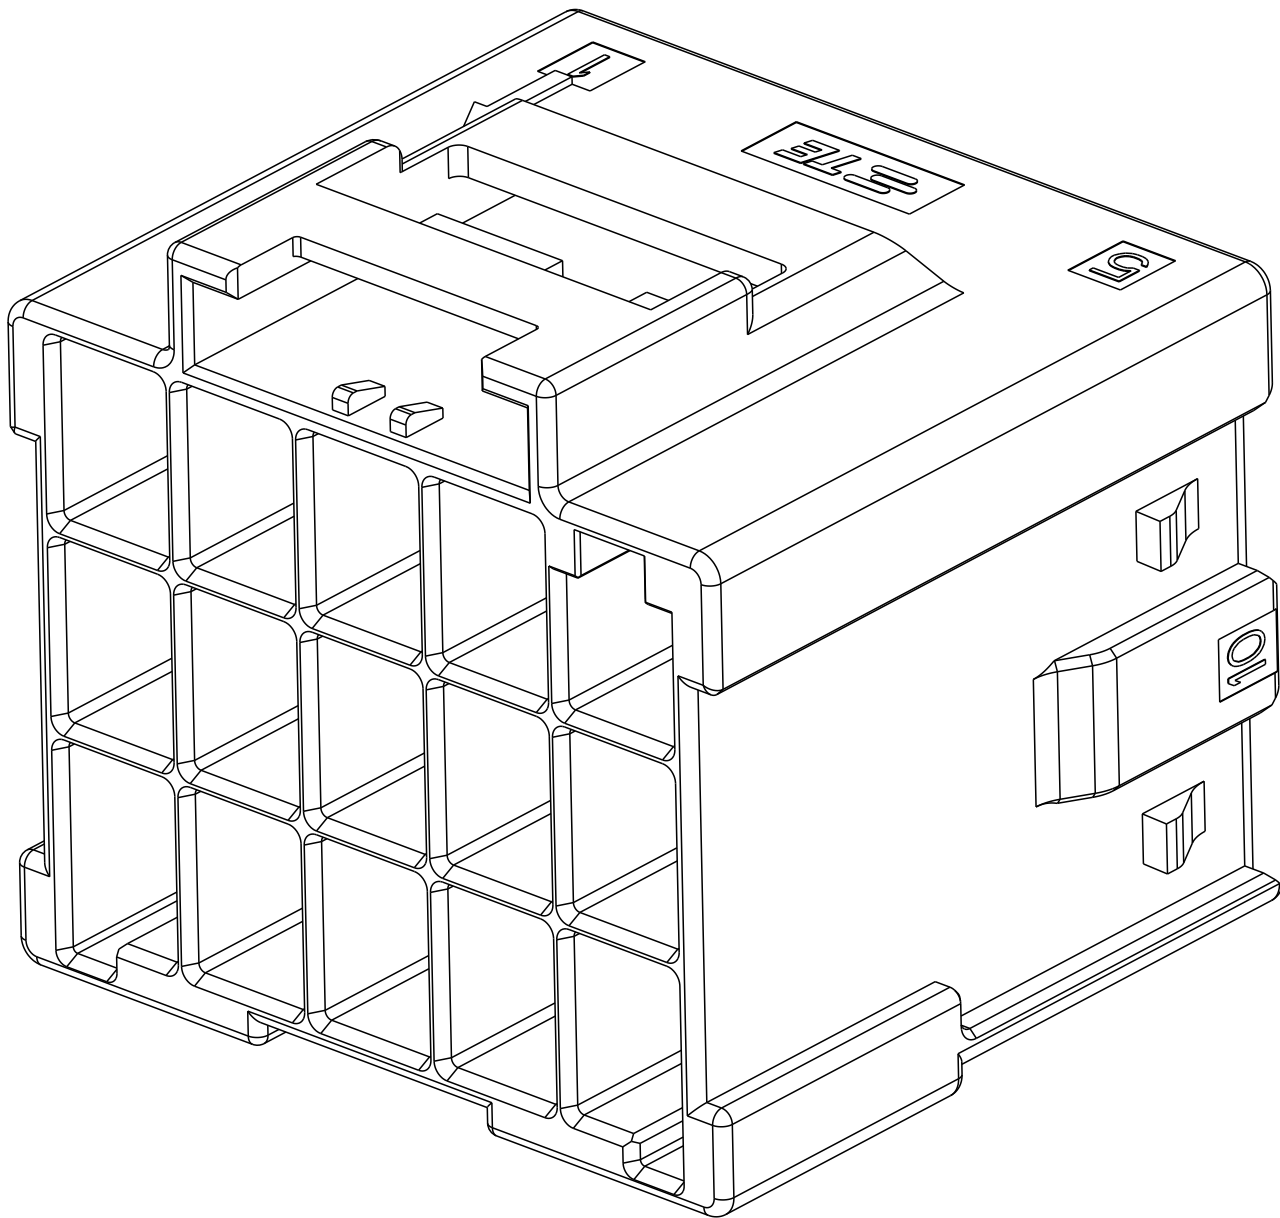
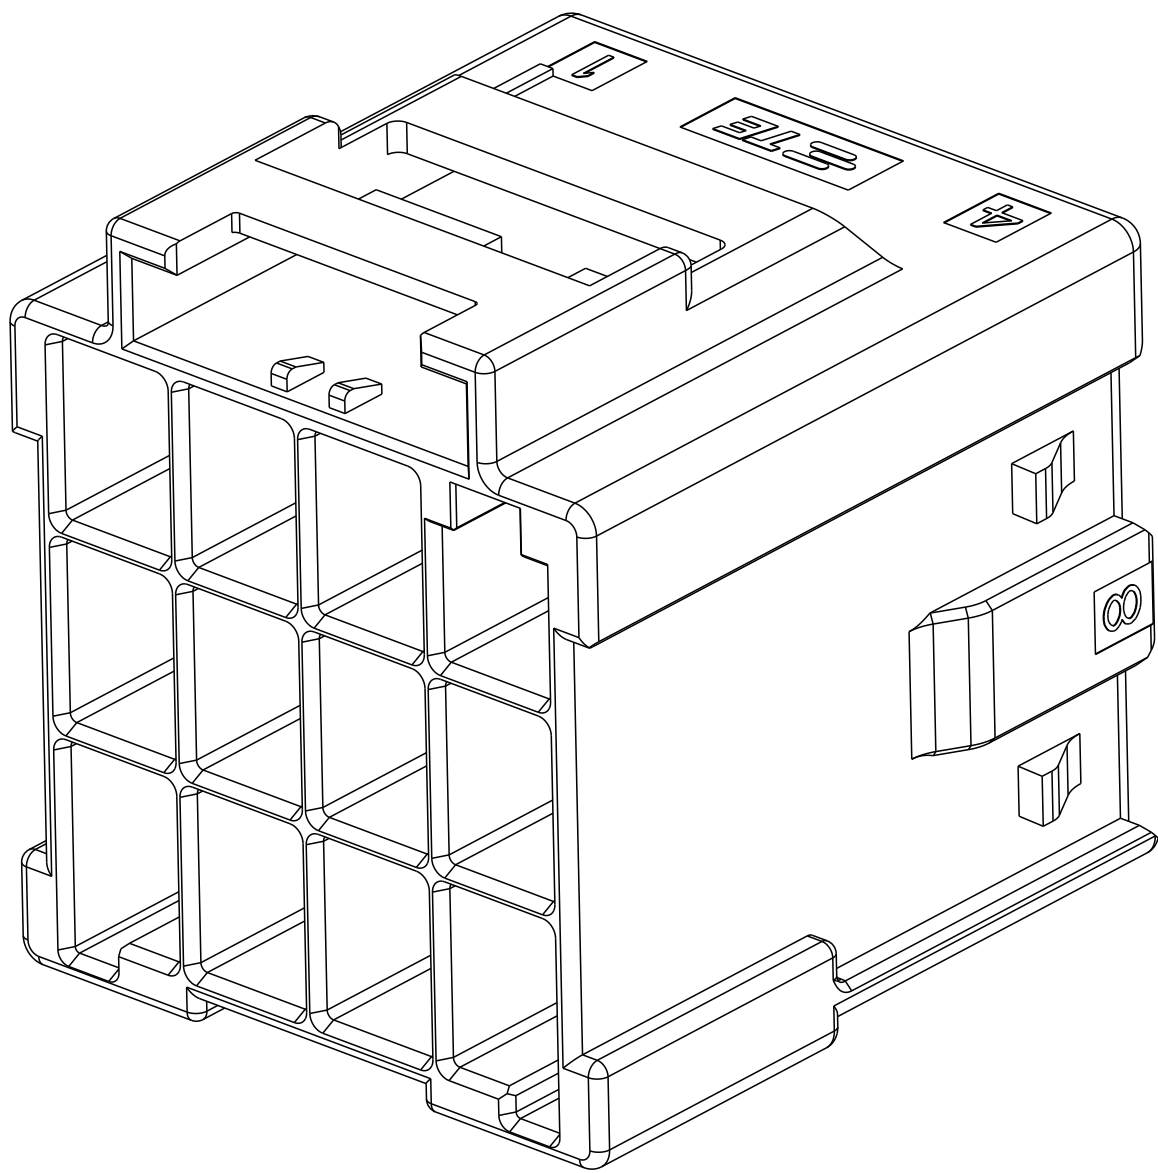
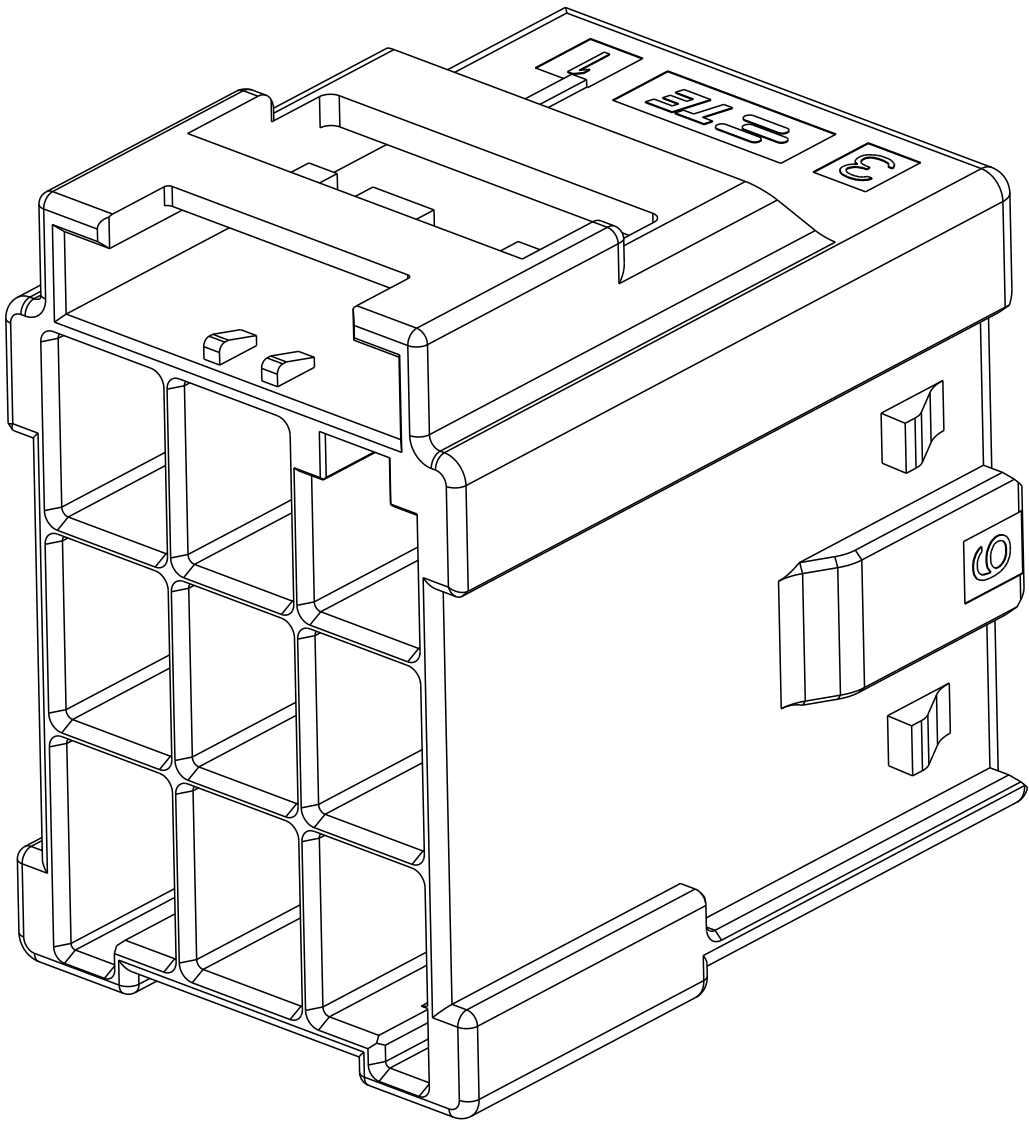


3*5	LEVEL 1	KEY A	1-1971874-7
		KEY B	2-1971874-7
		KEY C	3-1971874-7
		KEY D	4-1971874-7
	LEVEL 2	KEY A	5-1971874-7
		KEY B	6-1971874-7
		KEY C	7-1971874-7
		KEY D	8-1971874-7
3*4	LEVEL 1	KEY A	1-1971874-4
		KEY B	2-1971874-4
		KEY C	3-1971874-4
		KEY D	4-1971874-4
	LEVEL 2	KEY A	5-1971874-4
		KEY B	6-1971874-4
		KEY C	7-1971874-4
		KEY D	8-1971874-4
3*3	LEVEL 1	KEY A	1-1971874-3
		KEY B	2-1971874-3
		KEY C	3-1971874-3
		KEY D	4-1971874-3
	LEVEL 2	KEY A	5-1971874-3
		KEY B	6-1971874-3
		KEY C	7-1971874-3
		KEY D	8-1971874-3
POS.	MATERIAL	KEY	P/N

3*3 POSITIONS

3*4 POSITIONS

3*5 POSITIONS

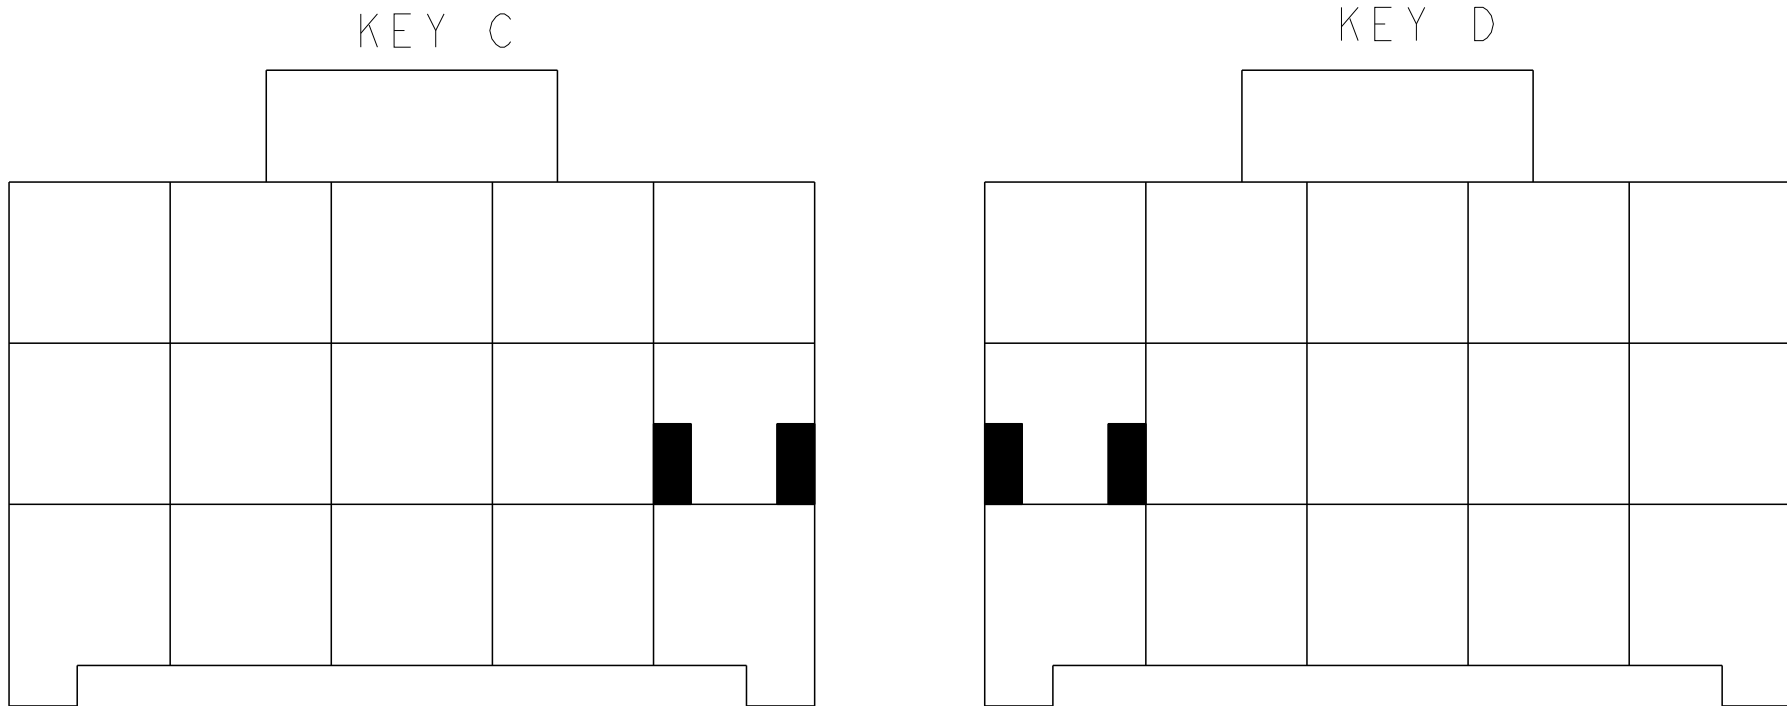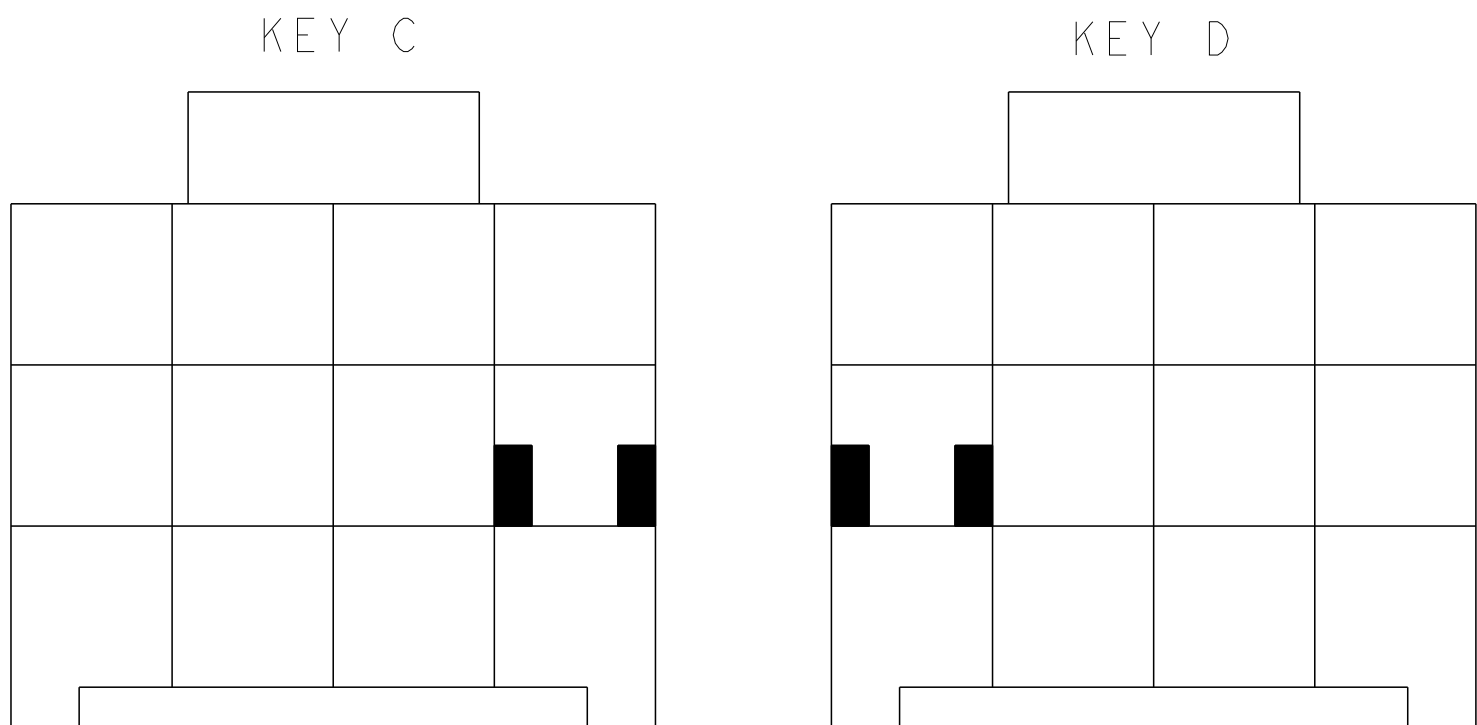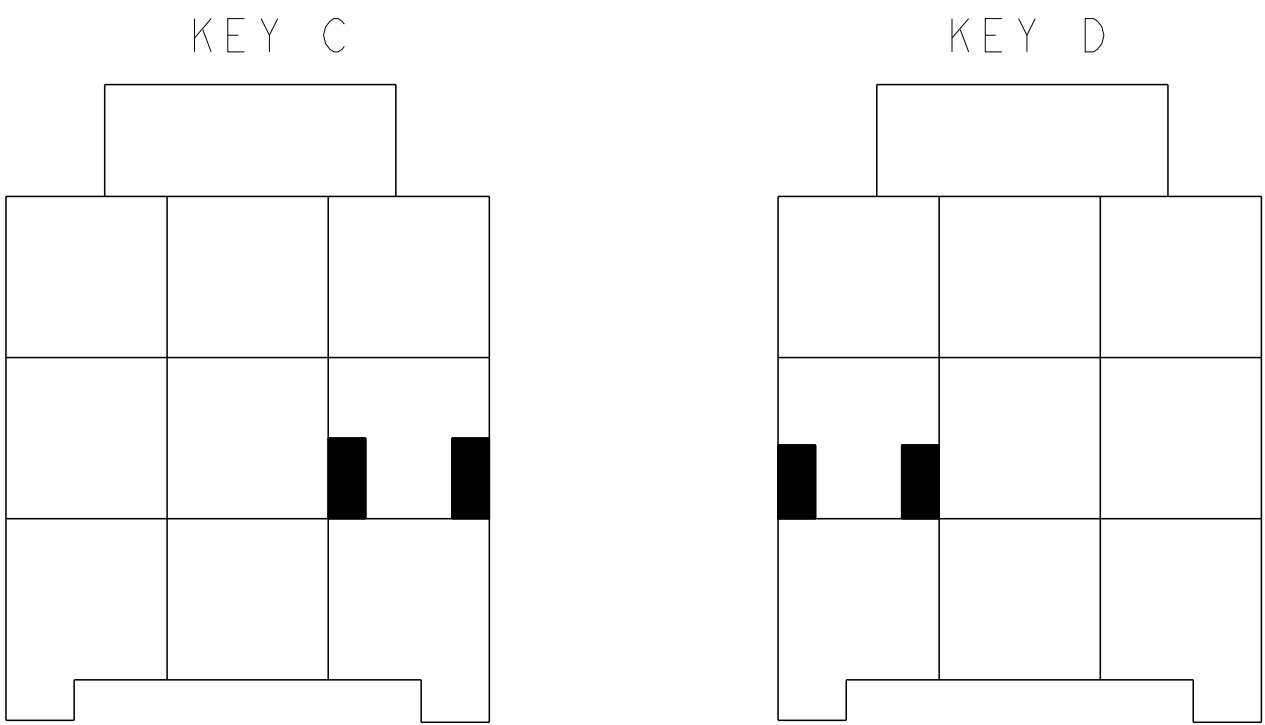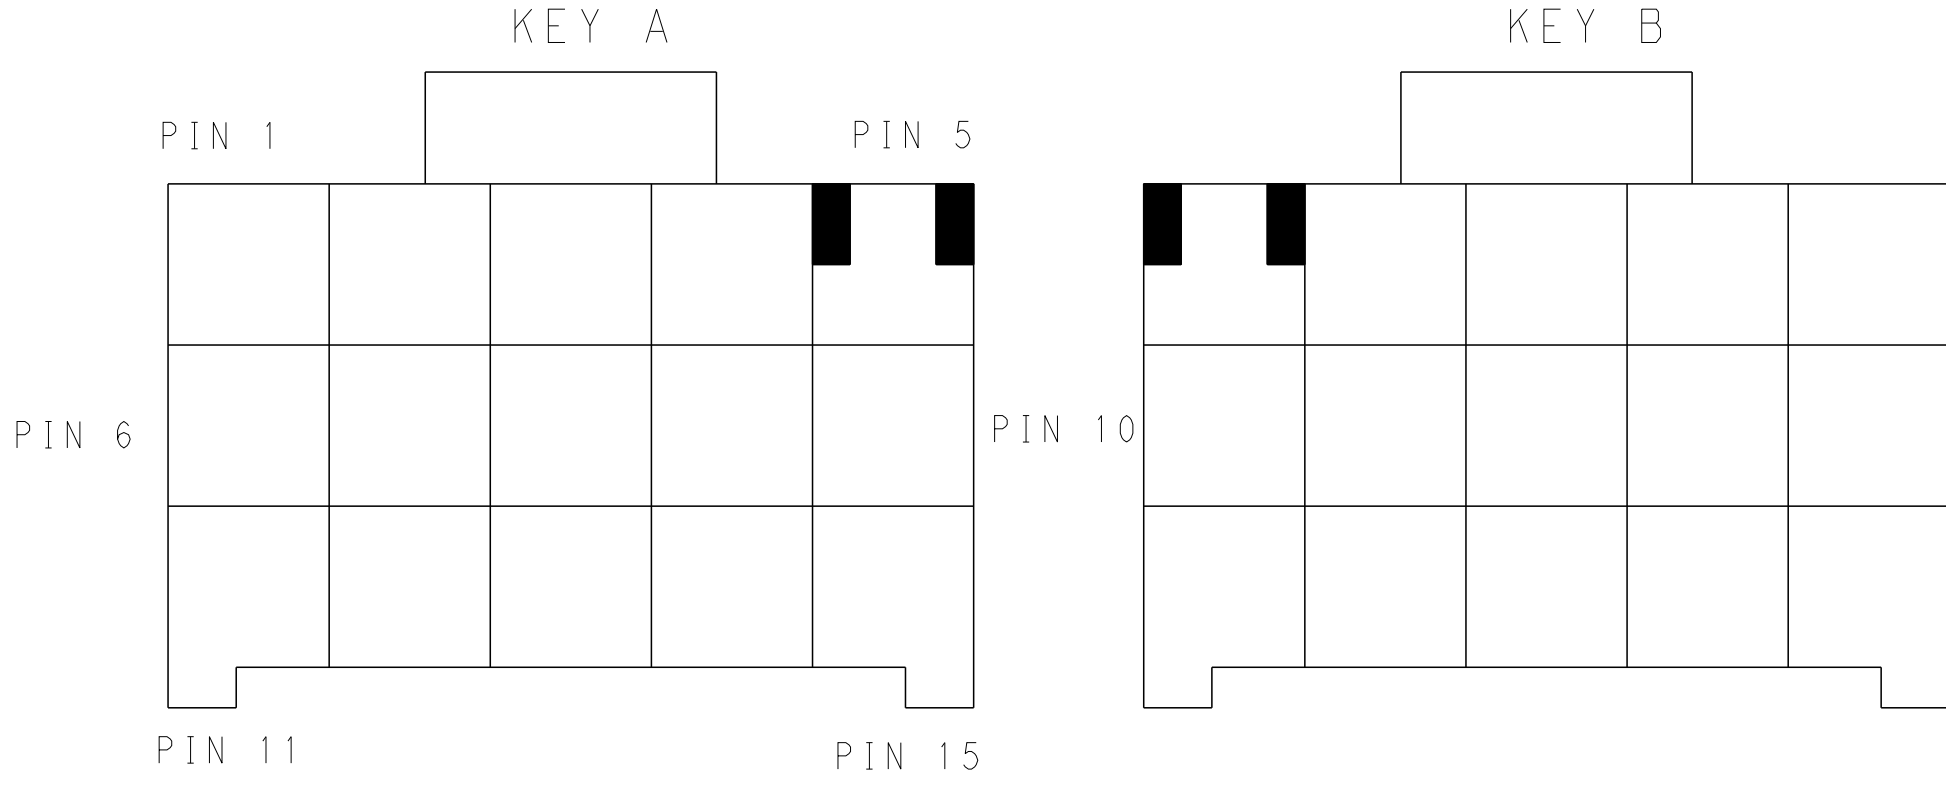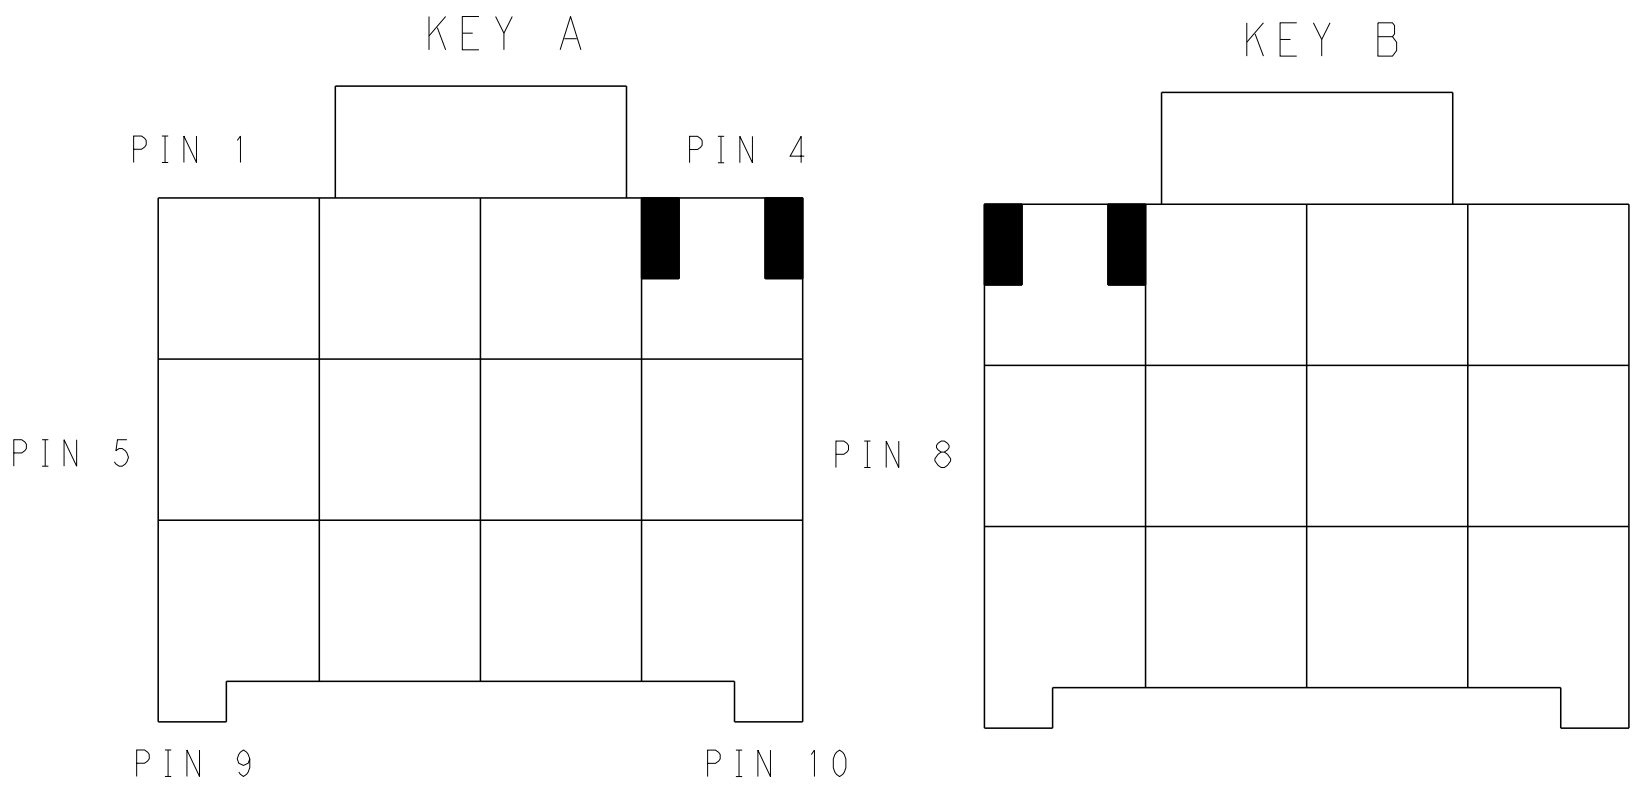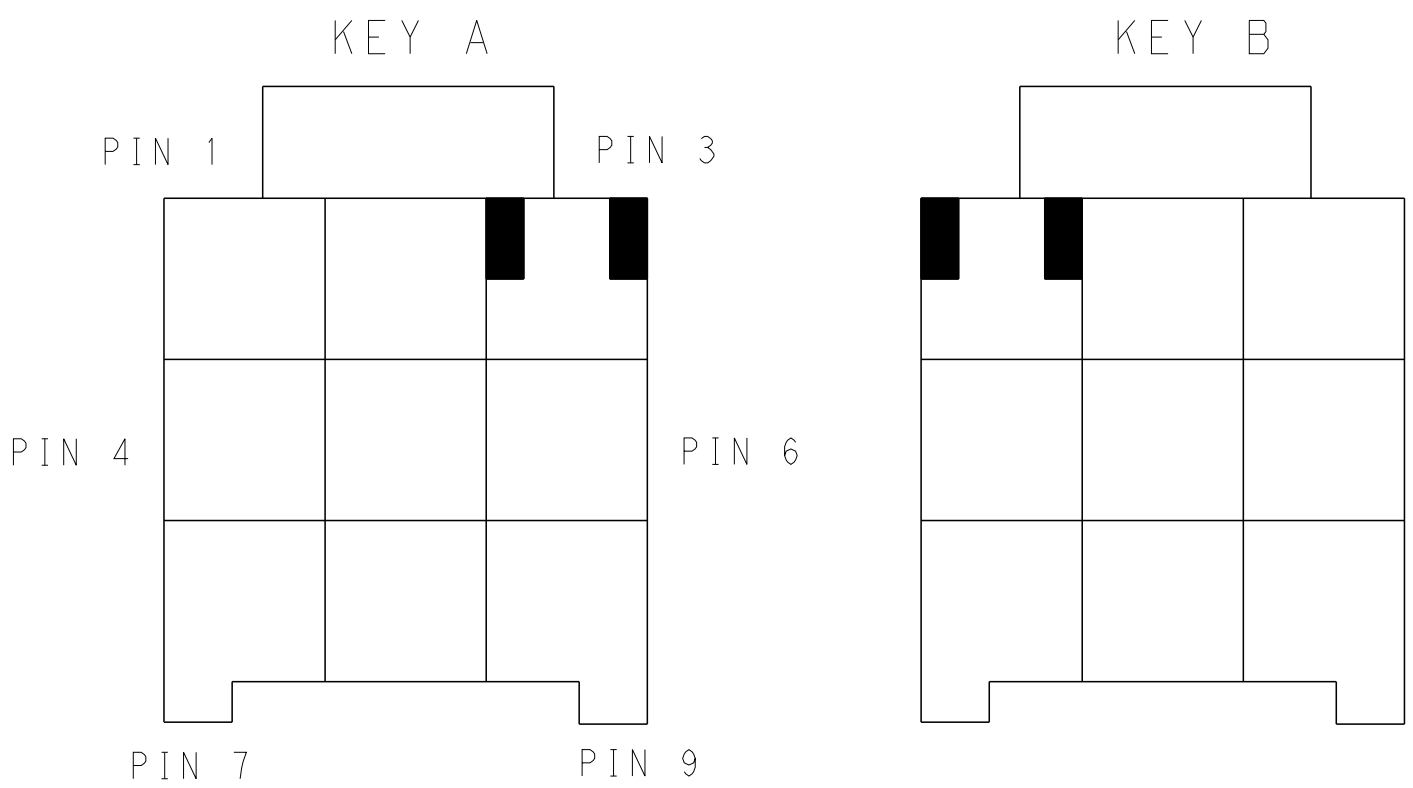

KEYING FOR 3*3 POS.

KEYING FOR 3*4 POS.

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.1

1 PLC ±0.35

2 PLC ±0.25

3 PLC ±.

4 PLC ±.

ANGLES ±.

FINISH -

MATERIAL

1

DWN TOMMY WU 09JUL2012

CHK HAPYE WU 09JUL2012

APVD YUHONG MAO 09JUL2012

PRODUCT SPEC

APPLICATION SPEC

114-106118

WEIGHT

Customer Drawing

NAME

CAP HOUSING, FREE HANGING, TRIPLE ROW POWER TRIPLE LOCK

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A100779

1971874

2

REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1971874-7](#)