

# ATC 700 B Series NPO Porcelain and Ceramic Multilayer Capacitors

- Case B Size (.110" x .110")
- Low ESR/ESL
- Low Noise
- Rugged Construction
- Extended WVDC up to 1500 VDC
- Capacitance Range 0.1 pF to 5100 pF
- Zero TCC
- High Self-Resonance
- Established Reliability (QPL)

ATC, the industry leader, is announcing new improved ESR/ESL performance for the 700 B Series RF/Microwave Capacitors. The superior high self-resonance and zero TCC characteristic of this Series provide excellent performance over a broad range of RF and microwave applications requiring minimum drift, including RF power. Porcelain and ceramic construction provide a rugged, hermetic package.

Typical functional applications: Bypass, Coupling, Tuning and DC Blocking.

Typical circuit applications: Filters, Oscillators, Timing and RF Power Amplifiers.

## ENVIRONMENTAL TESTS

ATC 700 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

### THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

### MOISTURE RESISTANCE:

MIL-STD-202, Method 106.

### LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

### LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C.


200% WVDC applied.

Voltage Applied:

200% of WVDC for capacitors rated at 500 volts DC or less.

120% of WVDC for capacitors rated at 1250 volts DC or less.

100% of WVDC for capacitors rated above 1250 volts DC.

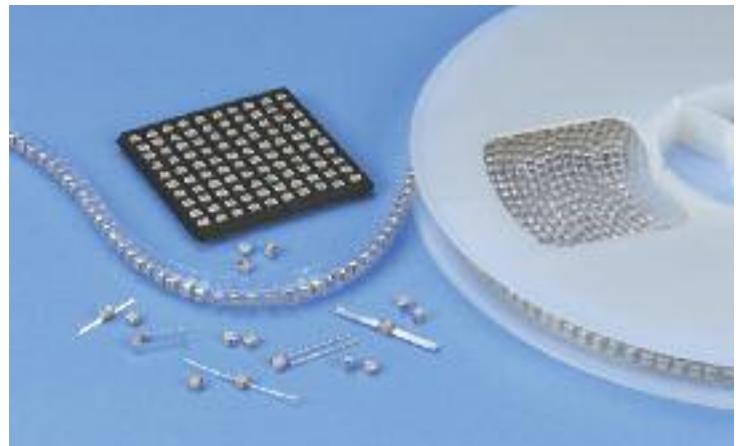

## ELECTRICAL AND MECHANICAL SPECIFICATIONS

### QUALITY FACTOR (Q):

Greater than 10,000 (0.1 pF to 200 pF) @ 1 MHz.

Greater than 2000 (220 pF to 1000 pF) @ 1 MHz.

Greater than 2000 (1100 pF to 5100 pF) @ 1 KHz.

### TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

0 ±30 PPM/°C (-55°C to +125°C)

### INSULATION RESISTANCE (IR):

0.1 pF to 470 pF:

10<sup>6</sup> Megohms min. @ +25°C at rated WVDC.

10<sup>5</sup> Megohms min. @ +125°C at rated WVDC.

510 pF to 5100 pF:

10<sup>5</sup> Megohms min. @ +25°C at rated WVDC.

10<sup>4</sup> Megohms min. @ +125°C at rated WVDC.

### WORKING VOLTAGE (WVDC):

 See Capacitance Values Table, page 2.

### DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds.

150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds.

120% of WVDC for capacitors rated above 1250 volts DC for 5 seconds.

### RETRACE:

 Less than ±(0.02% or 0.02 pF), whichever is greater.

### AGING EFFECTS:

 None

### PIEZOELECTRIC EFFECTS:

 None

(No capacitance variation with voltage or pressure).

### CAPACITANCE DRIFT:

 ±(0.02% or 0.02 pF), whichever is greater.

### OPERATING TEMPERATURE RANGE:

0.1 to 200 pF: from -55°C to +175°C

220 to 5100 pF: from -55°C to +125°C

### TERMINATION STYLES:

Available in various surface mount and leaded styles.

See Mechanical Configurations, page 3.

### TERMINAL STRENGTH:

 Terminations for chips and pellets withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.

AMERICAN  
ATC North America  
[sales@atceramics.com](mailto:sales@atceramics.com)

THE ENGINEERS' CHOICE™

TECHNICAL  
ATC Europe  
[saleseur@atceramics.com](mailto:saleseur@atceramics.com)

CERAMICS  
ATC Asia  
[sales@atceramics-asia.com](mailto:sales@atceramics-asia.com)

[www.atceramics.com](http://www.atceramics.com)

THE  
ENGINEERS'  
CHOICE®  
ISO 9001 REGISTERED  
COMPANY

# ATC 700 B Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.
OR1	0.1	B			3R3	3.3				330	33				331	330			
OR2	0.2				3R6	3.6				360	36				361	360			
OR3	0.3	B, C			3R9	3.9				390	39				391	390	200		
OR4	0.4				4R3	4.3				430	43				431	430			
OR5	0.5				4R7	4.7	B, C, D			470	47				471	470			
OR6	0.6				5R1	5.1				510	51				511	510			
OR7	0.7				5R6	5.6				560	56				561	560			
OR8	0.8				6R2	6.2				620	62				621	620			
OR9	0.9				6R8	6.8				680	68				681	680			
1R0	1.0				7R5	7.5	B, C, J			750	75				751	750			
1R1	1.1				8R2	8.2	K, M			820	82				821	820			
1R2	1.2				9R1	9.1				910	91				911	910	150		
1R3	1.3	B, C, D	500	1500	100	10				101	100				102	1000	F, G, J	K, M	N/A
1R4	1.4				110	11				111	110				112	1100			
1R5	1.5				120	12				121	120				122	1200			
1R6	1.6				130	13				131	130				152	1500			
1R7	1.7				150	15				151	150				182	1800			
1R8	1.8				160	16	F, G, J,			161	160				222	2200			
1R9	1.9				180	18	K, M			181	180				272	2700			
2R0	2.0				200	20				201	200				302	3000			
2R1	2.1				220	22				221	220				332	3300			
2R2	2.2				240	24				241	240				392	3900			
2R4	2.4				270	27				271	270				472	4700			
2R7	2.7				300	30				301	300				512	5100			
3R0	3.0																		

$$VRMS = 0.707 \times WVDC$$

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

Capacitance values in **bold** type indicate porcelain dielectric. All other capacitance values indicate ceramic dielectric.

All 700 B Capacitors are available laser marked with ATC's identification, capacitance code and tolerance.

NOTE: EXTENDED WVDC DOES NOT APPLY TO CDR PRODUCTS.

### ATC PART NUMBER CODE

Series	ATC700	B	33	1	J	W	500	X	T
Case Size									
Capacitance Code:									
First 2 significant digits for capacitance.									
R=Decimal Point									
Indicates number of zeros following digits of capacitance in picofarads except for decimal values.									
Capacitance Tolerance									
<b>CAPACITANCE TOLERANCE</b>									
Code	B	C	D	F	G	J	K	M	
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%	

Packaging

T - Tape and Reel, 1000 pc. qty.\*

TV - Vertical Orientation of Product, Tape and Reel, 1000 pc. qty.\*

I - Special Packaging. Consult Factory.

\*Consult ATC for other quantities

ATC Cap-Pac® packaging (100 pc. qty. std.) is also available. For this option, leave last field blank.

Laser Marking

WVDC

Termination Code

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.






A M E R I C A N   T E C H N I C A L   C E R A M I C S

# ATC 700 B Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
700B	W	CDR14BP	B Solder Plate		.110 .020 -.010 (2.79 +.51 -.25)	.110 ±.015 (2.79 ±.038)			Tin/Lead, Solder Plated over Nickel Barrier Termination
700B	P	CDR14BP	B Pellet		.110 .035 -.010 (2.79 +.89 -.25)	.110 ±.015 (2.79 ±.038)		.015 (0.38) ±.010 (0.25)	Heavy Tin/Lead Coated, over Nickel Barrier Termination
700B	T	N/A	B Solderable Nickel Barrier		.110 .020 -.010 (2.79 +.51 -.25)	.110 ±.015 (2.79 ±.038)			<b>RoHS Compliant</b> Tin Plated over Nickel Barrier Termination
700B	CA	CDR13BP	B Gold Chip		.110 .020 -.010 (2.79 +.51 -.25)	.110 ±.015 (2.79 ±.038)			<b>RoHS Compliant</b> Gold Plated over Nickel Barrier Termination
700B	MS	CDR21BP	B Microstrip				.120 (3.05) max.		Length (L <sub>L</sub> )
700B	AR	CDR22BP	B Axial Ribbon		.135 ±.015 (3.43 ±.038)				Width (W <sub>L</sub> )
700B	RR	CDR24BP	B Radial Ribbon			.110 ±.015 (2.79 ±.038)		N/A	Thickness (T <sub>L</sub> )
700B	RW	CDR23BP	B Radial Wire			.145 ±.020 (3.68 ±.051)			
700B	AW	CDR25BP	B Axial Wire						.500 (12.7) min. #26 AWG., .016 (.406) dia. nominal

Additional lead styles available: Narrow Microstrip (NM), Narrow Axial Ribbon (NA) and Vertical Narrow Microstrip (H). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant. For a complete military catalog, request American Technical Ceramics document ATC 001-818.


# ATC 700 B Capacitors: Non-Magnetic Mechanical Configurations\*

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
700B	WN	Meets Requirements	B Non-Mag Solder Plate		.110 .025 -.010 (2.79 +.064 -.025)	.110 ±.015 (2.79 ±.038)			Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination
700B	PN	Meets Requirements	B Non-Mag Pellet		.110 .035 -.010 (2.79 +.089 -.025)	.110 ±.015 (2.79 ±.038)	.102 (2.59) max.	.015 (0.38) ±.010 (0.25)	Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination
700B	TN	Meets Requirements	B Non-Mag Solderable Barrier		.110 .025 -.010 (2.79 +.064 -.025)	.110 ±.015 (2.79 ±.038)			<b>RoHS Compliant</b> Tin Plated over Non-Magnetic Barrier Termination
700B	MN	Meets Requirements	B Non-Mag Microstrip				.120 (3.05) max.		Length (L <sub>L</sub> )
700B	AN	Meets Requirements	B Non-Mag Axial Ribbon		.135 ±.015 (3.43 ±.038)				Width (W <sub>L</sub> )
700B	FN	Meets Requirements	B Non-Mag Radial Ribbon		.110 ±.015 (2.79 ±.038)				Thickness (T <sub>L</sub> )
700B	RN	Meets Requirements	B Non-Mag Radial Wire		.145 ±.020 (3.68 ±.051)				
700B	BN	Meets Requirements	B Non-Mag Axial Wire						


\*Capacitors with values greater than 200 pF contain a trace magnetic element that may exhibit weak magnetic properties.

\*\*Additional lead styles available: Narrow Microstrip (DN), Narrow Axial Ribbon (GN) and Vertical Narrow Microstrip (HN). Other lead lengths are available; consult factory; All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

## Suggested Mounting Pad Dimensions

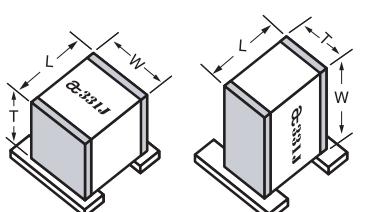

Horizontal Electrode Orientation      Vertical Electrode Orientation

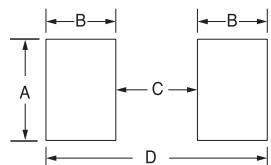

Case B Vertical Mount

Cap Value	Pad Size	A Min.	B Min.	C Min.	D Min.
0.1 pF	Normal	.065	.050	.075	.175
	High Density	.045	.030	.075	.135
0.2 pF	Normal	.090	.050	.075	.175
	High Density	.070	.030	.075	.135
0.3 to 510 pF	Normal	.110	.050	.075	.175
	High Density	.090	.030	.075	.135
> 510 pF	Normal	.120	.050	.075	.175
	High Density	.100	.030	.075	.135

Horizontal Mount

All values	Normal	.130	.050	.075	.175
	High Density	.110	.030	.075	.135

Dimensions are in inches.

A M E R I C A N   T E C H N I C A L   C E R A M I C S


ATC North America  
sales@atceramics.com

ATC Europe  
saleseur@atceramics.com


ATC Asia  
sales@atceramics-asia.com

# ATC 700 B Performance Data


ESR VS. CAPACITANCE  
ATC SERIES 700, CASE B

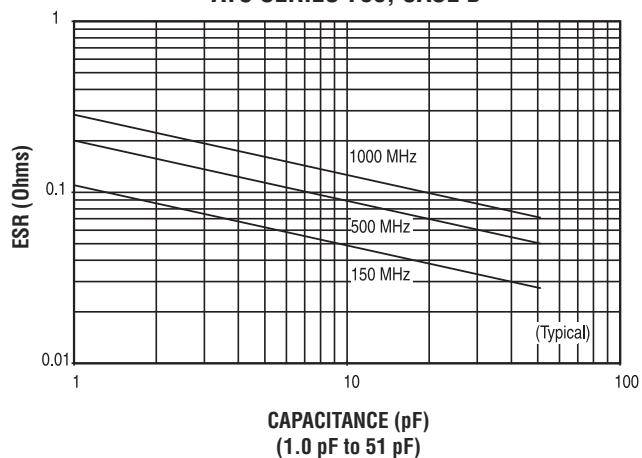


Q VS. CAPACITANCE  
ATC SERIES 700, CASE B

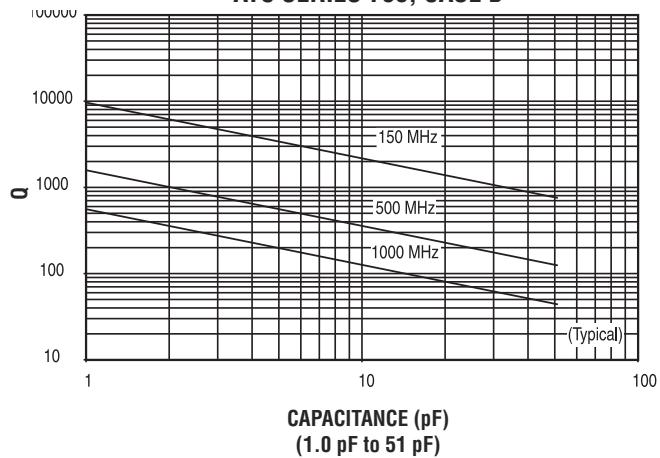


ESR VS. CAPACITANCE  
ATC SERIES 700, CASE B

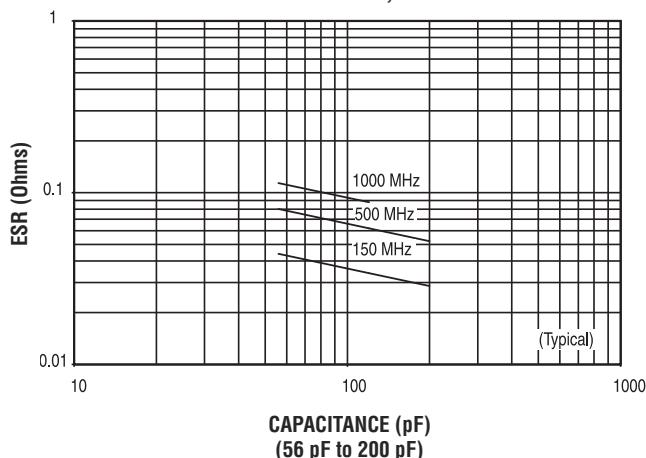


Q VS. CAPACITANCE  
ATC SERIES 700, CASE B

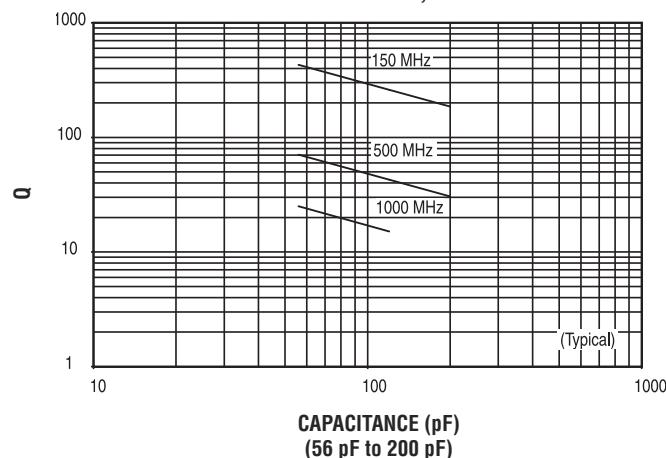

ESR VS. CAPACITANCE  
ATC SERIES 700, CASE B

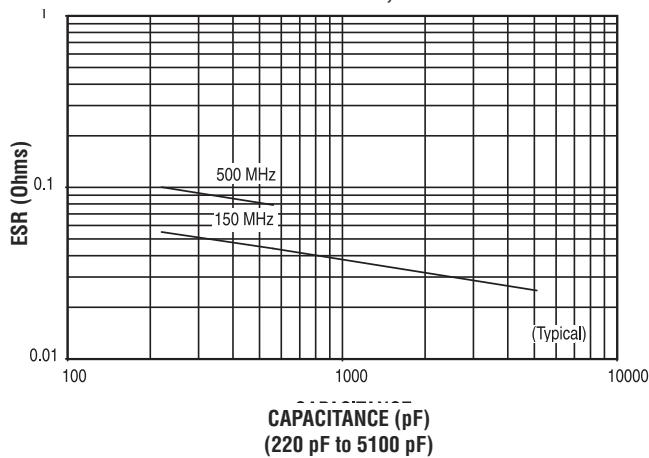

Q VS. CAPACITANCE  
ATC SERIES 700, CASE B

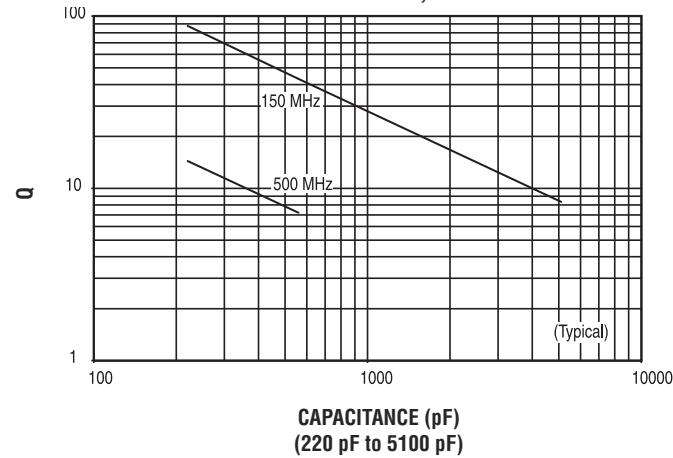

A M E R I C A N   T E C H N I C A L   C E R A M I C S


ATC North America  
sales@atceramics.com

ATC Europe  
saleseur@atceramics.com


ATC Asia  
sales@atceramics-asia.com

# ATC 700 B Performance Data


**SERIES RESONANCE VS. CAPACITANCE**  
ATC SERIES 700, CASE B

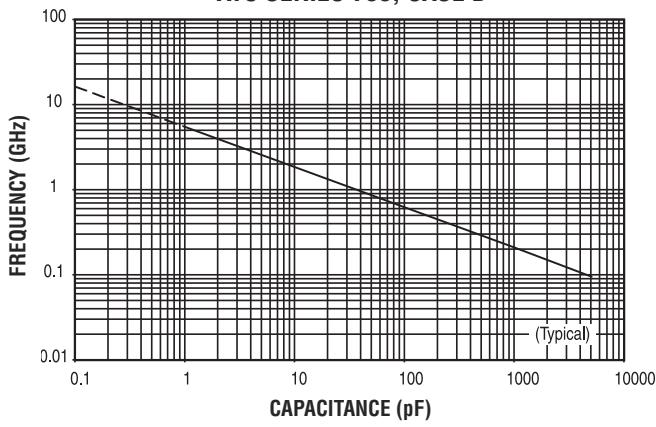


**CURRENT RATING VS. CAPACITANCE**  
ATC SERIES 700, CASE B

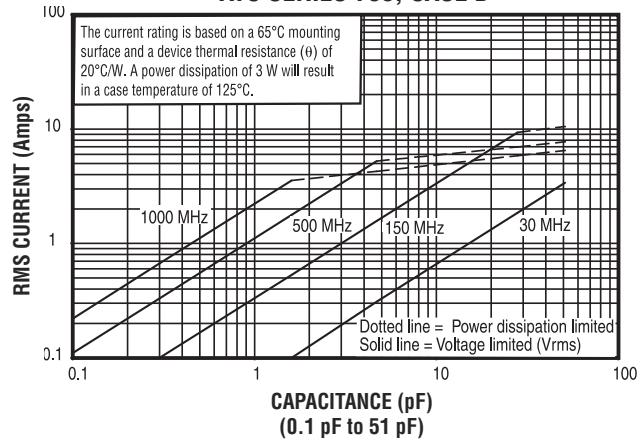


**CURRENT RATING VS. CAPACITANCE**  
ATC SERIES 700, CASE B

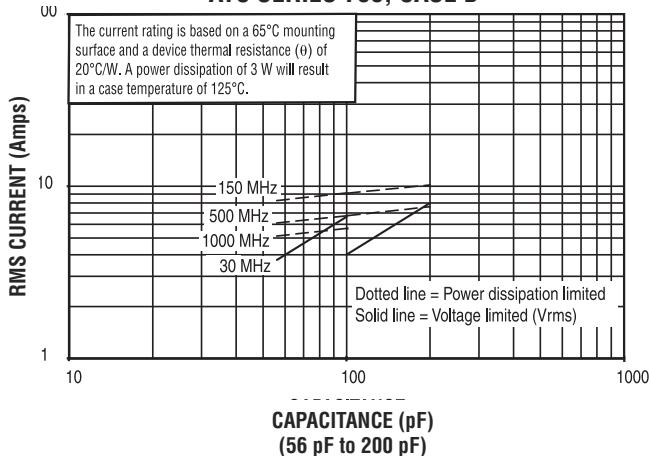

**CURRENT RATING VS. CAPACITANCE**  
ATC SERIES 700, CASE B

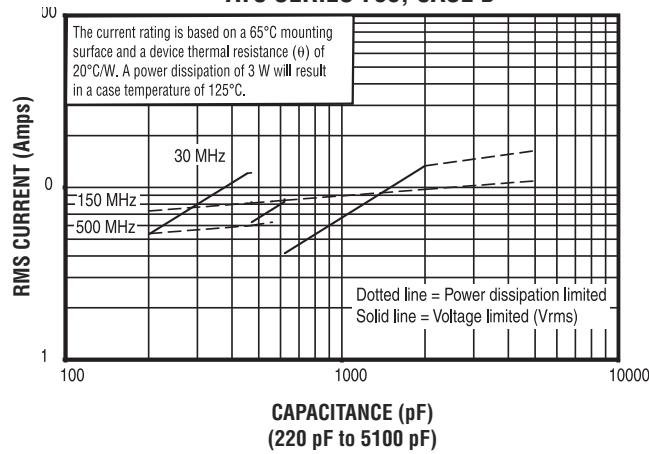


**CAPACITANCE CHANGE VS. TEMPERATURE**  
ATC SERIES 700, CASE B

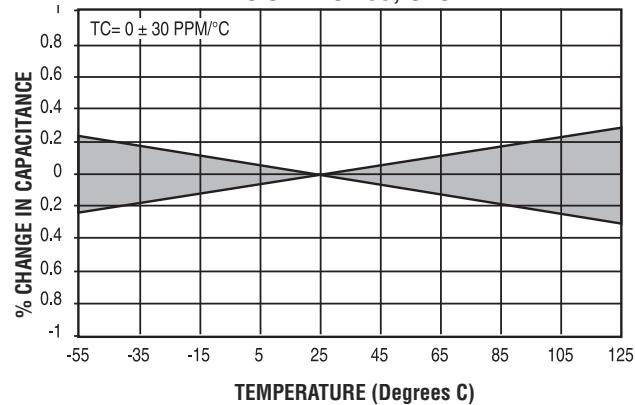


# ATC 700 B Performance Data

## CURRENT RATING VS. CAPACITANCE ATC SERIES 700, CASE B, EXTENDED VOLTAGE

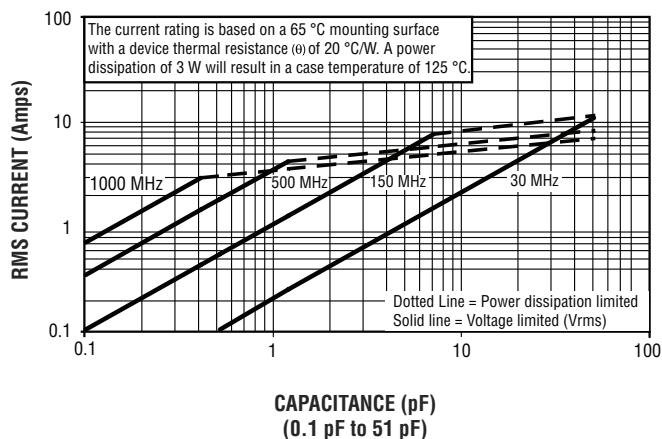

## CURRENT RATING VS. CAPACITANCE ATC SERIES 700, CASE B, EXTENDED VOLTAGE

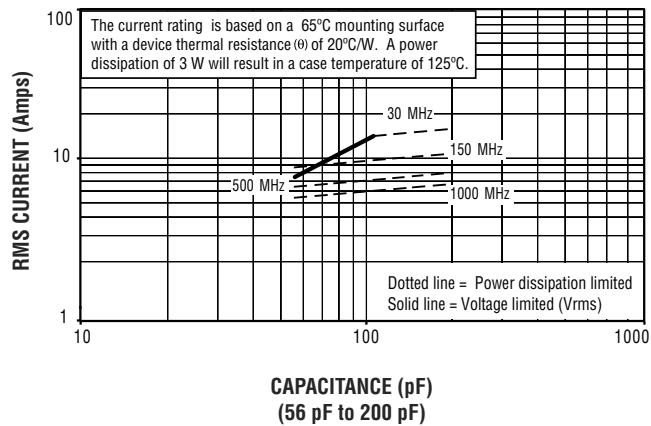

*Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at [www.atceramics.com/productfinder/default.asp](http://www.atceramics.com/productfinder/default.asp). Click on the link for Terms and Conditions of Sale.*

*ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.*

© 1996 American Technical Ceramics Corp. All Rights Reserved

ATC # 001-814 Rev. T, 4/18

**A M E R I C A N   T E C H N I C A L   C E R A M I C S**  
ATC North America  
[sales@atceramics.com](mailto:sales@atceramics.com)

ATC Europe  
[saleseur@atceramics.com](mailto:saleseur@atceramics.com)

ATC Asia  
[sales@atceramics-asia.com](mailto:sales@atceramics-asia.com)

---

[www.atceramics.com](http://www.atceramics.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## American Technical Ceramics (ATC):

[700B0R1BT500XT](#) [700B0R1BW500XT](#) [700B0R2BT500XT](#) [700B0R2BW500XT](#) [700B0R3BT500XT](#)  
[700B0R3BW500XT](#) [700B0R3CT500XT](#) [700B0R3CW500XT](#) [700B0R4BT500XT](#) [700B0R4BW500XT](#)  
[700B0R4CT500XT](#) [700B0R4CW500XT](#) [700B0R5BT500XT](#) [700B0R5BW500XT](#) [700B0R5CT500XT](#)  
[700B0R5CW500XT](#) [700B0R5DT500XT](#) [700B0R5DW500XT](#) [700B0R6BT500XT](#) [700B0R6BW500XT](#)  
[700B0R6CT500XT](#) [700B0R6CW500XT](#) [700B0R6DT500XT](#) [700B0R6DW500XT](#) [700B0R7BT500XT](#)  
[700B0R7BW500XT](#) [700B0R7CT500XT](#) [700B0R7CW500XT](#) [700B0R7DT500XT](#) [700B0R7DW500XT](#)  
[700B0R8BT500XT](#) [700B0R8BW500XT](#) [700B0R8CT500XT](#) [700B0R8CW500XT](#) [700B0R8DT500XT](#)  
[700B0R8DW500XT](#) [700B0R9BT500XT](#) [700B0R9BW500XT](#) [700B0R9CT500XT](#) [700B0R9CW500XT](#)  
[700B0R9DT500XT](#) [700B0R9DW500XT](#) [700B100FT500XT](#) [700B100FW500XT](#) [700B100GT500XT](#)  
[700B100GW500XT](#) [700B100JT500XT](#) [700B100JW500XT](#) [700B100KT500XT](#) [700B100KW500XT](#) [700B100MT500XT](#)  
[700B100MW500XT](#) [700B101FT500XT](#) [700B101FW500XT](#) [700B101GT500XT](#) [700B101GW500XT](#)  
[700B101JT500XT](#) [700B101JW500XT](#) [700B101KT500XT](#) [700B101KW500XT](#) [700B101MT500XT](#) [700B101MW500XT](#)  
[700B102FT50XT](#) [700B102FW50XT](#) [700B102GT50XT](#) [700B102GW50XT](#) [700B102JT50XT](#) [700B102JW50XT](#)  
[700B102KT50XT](#) [700B102KW50XT](#) [700B102MT50XT](#) [700B102MW50XT](#) [700B110FT500XT](#) [700B110FW500XT](#)  
[700B110GT500XT](#) [700B110GW500XT](#) [700B110JT500XT](#) [700B110JW500XT](#) [700B110KT500XT](#) [700B110KW500XT](#)  
[700B110MT500XT](#) [700B110MW500XT](#) [700B111FT300XT](#) [700B111FW300XT](#) [700B111GT300XT](#)  
[700B111GW300XT](#) [700B111JT300XT](#) [700B111JW300XT](#) [700B111KT300XT](#) [700B111KW300XT](#) [700B111MT300XT](#)  
[700B111MW300XT](#) [700B112FT50XT](#) [700B112FW50XT](#) [700B112GT50XT](#) [700B112GW50XT](#) [700B112JT50XT](#)  
[700B112JW50XT](#) [700B112KT50XT](#) [700B112KW50XT](#)