

4


3

2


1

LOC	DIST	REVISIONS				
CE	—	P	LTR	DESCRIPTION	DATE	APVD
			A	RELEASE	07MAY10	BB JD

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.2dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
- 2 MINIMUM RETURN LOSS AT 1310nm: 55dB. RETURN LOSS NOT REQUIRED FOR ASSEMBLIES <= 3 METERS.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

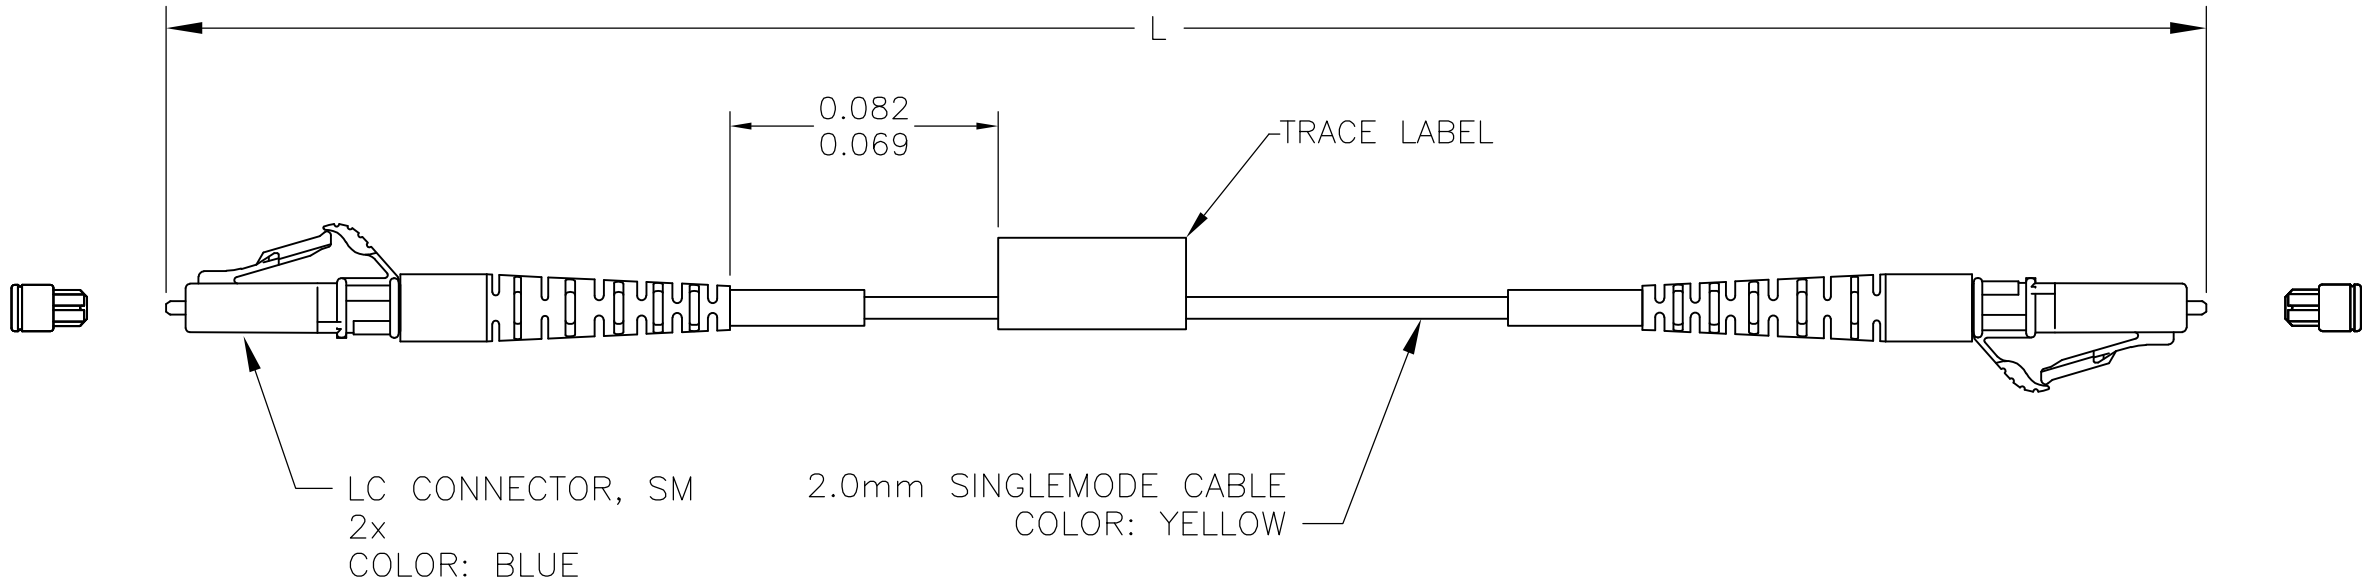

0.21	10.00±0.15 [393.7±6.0]	1-2064844-0
0.20	9.00±0.15 [354.3±6.0]	2064844-9
0.20	8.00±0.08 [315.0±3.0]	2064844-8
0.20	7.00±0.08 [275.6±3.0]	2064844-7
0.20	6.00±0.08 [236.2±3.0]	2064844-6
0.20	5.00±0.08 [196.8±3.0]	2064844-5
0.20	4.00±0.05 [118.1±2.0]	2064844-4
2 0.20	3.00±0.05 [118.1±2.0]	2064844-3
2 0.20	2.00±0.05 [78.7±2.0]	2064844-2
2 0.20	1.00±0.05 [39.4±2.0]	2064844-1
1 MAX IL (dB)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.BRIGGS 07MAY2010		 Tyco Electronics Corporation Harrisburg, PA 17105-3608						
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 07MAY2010								
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 07MAY2010		NAME CABLE ASSY, FIBER OPTIC, 2.0mm, SM, OFNR, LC TO LC —					
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		PRODUCT SPEC —							
	MATERIAL —		APPLICATION SPEC —				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			WEIGHT —				A3	00779	C-2064844	—
		CUSTOMER DRAWING				SCALE NTS	SHEET 1 OF 1	REV A		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2064844-1](#)