


∅ 0.05 (S) X Y  
 ALL PLATED THRU HOLES

RECOMMENDED PC BOARD  
 LAYOUT, BACKPLANE,  
 COMPONENT SIDE SHOWN  
 SCALE 4:1

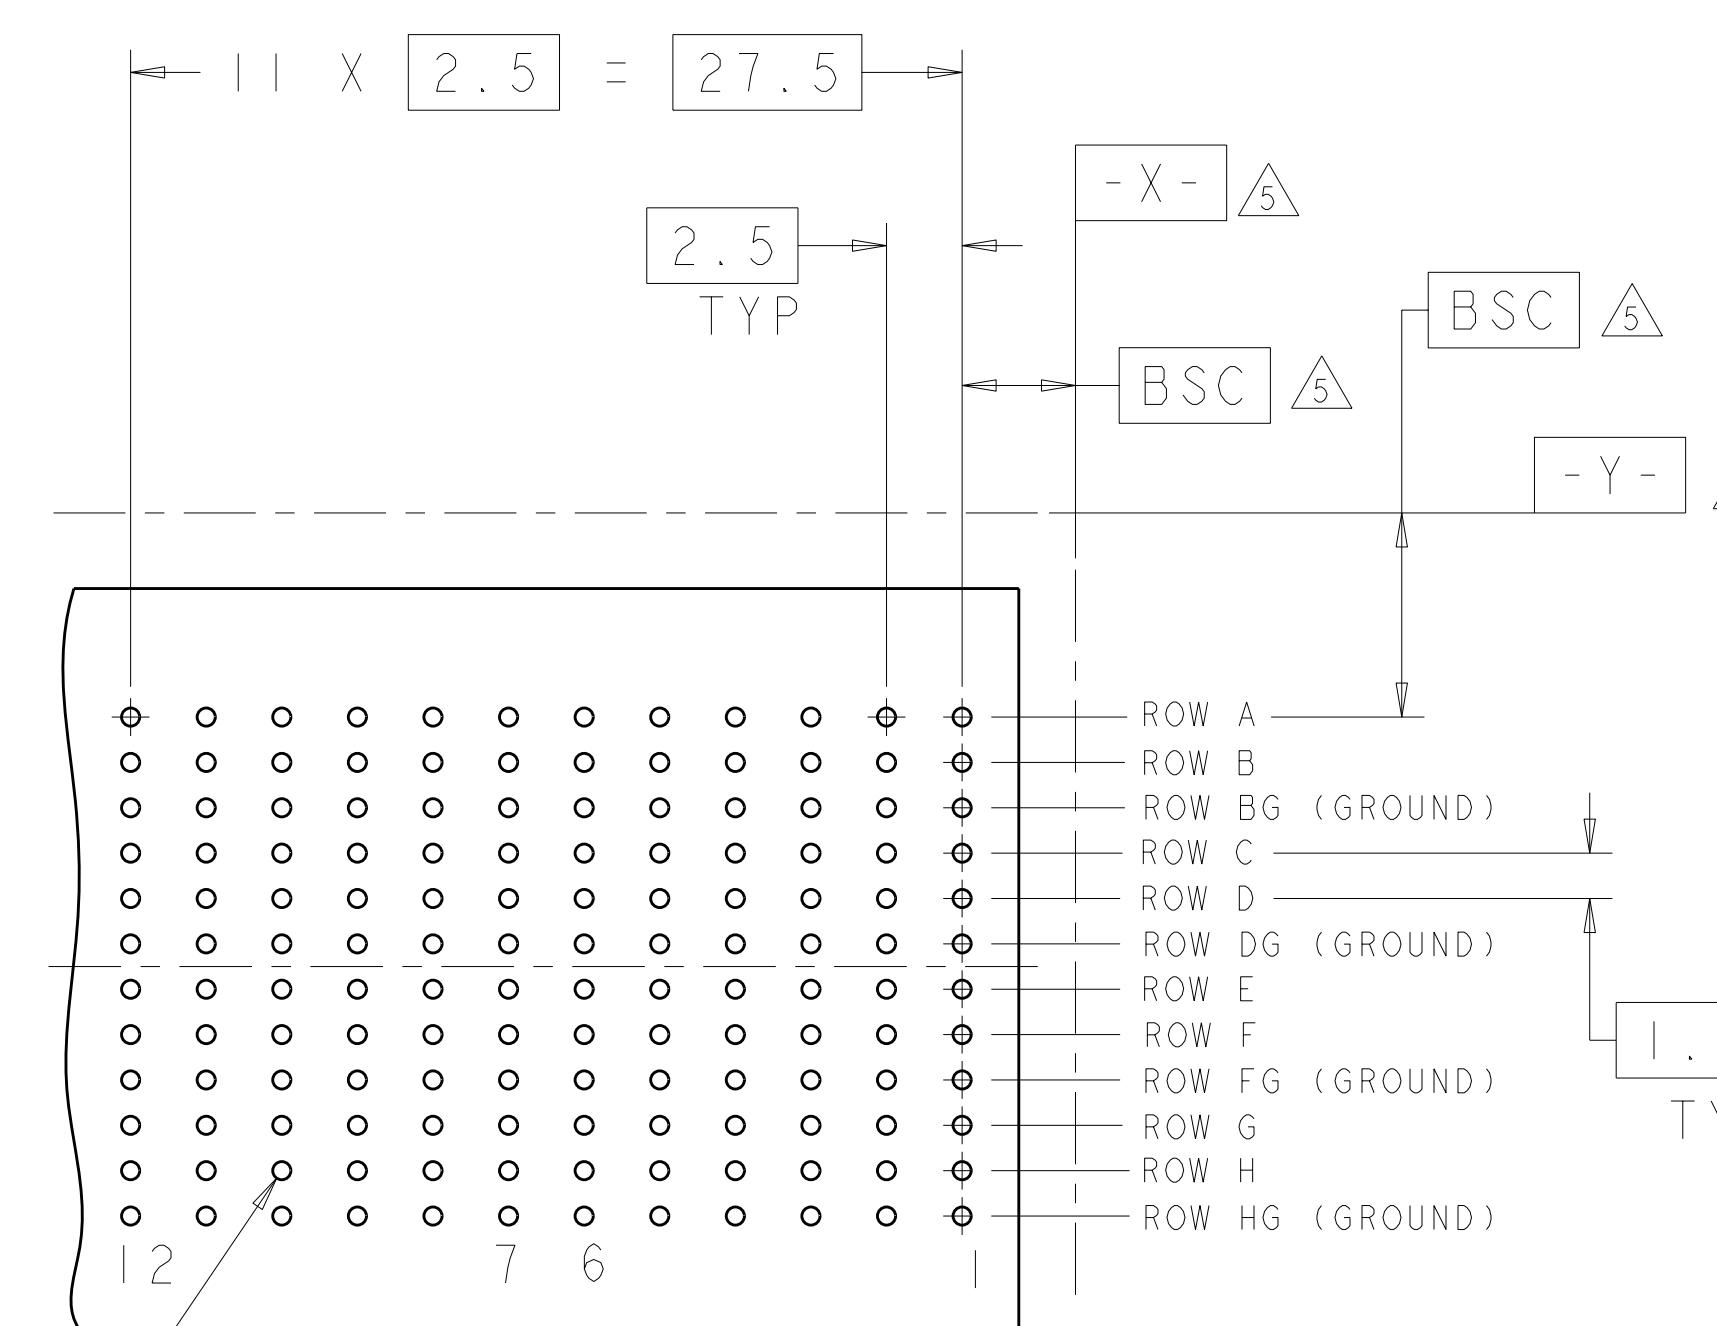

- ① REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- ② MATERIAL: CONTACT AND SHIELD - PHOSPHOR BRONZE HOUSING - GLASS FILLED POLYESTER, UL 94V-0.
- ③ FINISH: SIGNAL AND GROUND CONTACTS: MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
 COMPLIANT PIN AREA: 0.5 μm MIN MATTE TIN OVER BASE PLATING
- ④ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- ⑤ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- ⑥ THE FOUR GROUNDS IN EACH COLUMN ARE COMMONED.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

3.80	6469287-2
5.30	6469287-1
DIM M	PART NUMBER
25JUL2004	S. J. MAGARO
17AUG2007	R. A. PATTERSON
APVD	CHG
PRODUCT SPEC	-
APPLICATION SPEC	-
MATERIAL	2
FINISH	3
ANGLES	±1°
WEIGHT	-
SIZE	CAGE CODE
A 100779	DRAWING NO
REV B	RESTRICTED TO
CUSTOMER DRAWING	
8:1	SCALE
1	OF
REV B	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6469287-1](#)