



Rating	3A 125VAC 1.5A 250VAC		Mounting Hole		Circuit Diagram LED Rating Red:If=20mA,Vf=1.7V Yellow:If=20mA,Vf=2.0V Green:If=20mA,Vf=2.1V 
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1000V 1 minute				
Operation Temperature	-0°C ~ 65°C				
Switch Function	4P SPST (ON)-OFF (LED)				

***MATERIAL:**





Frame: Black, Nylon 66 (94-V2)

Actuator: Red, PC (94-V2)



Terminals: Silver plated, Copper alloy

Contacts: Silver plated, Copper alloy

Printed: None

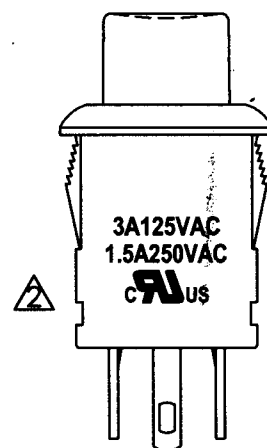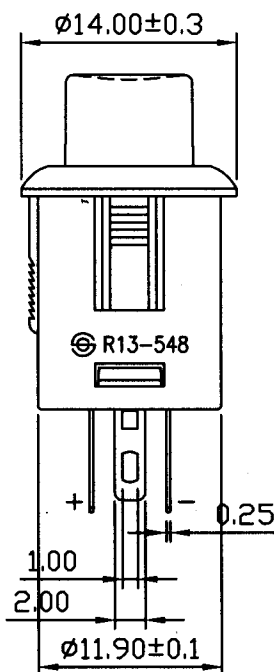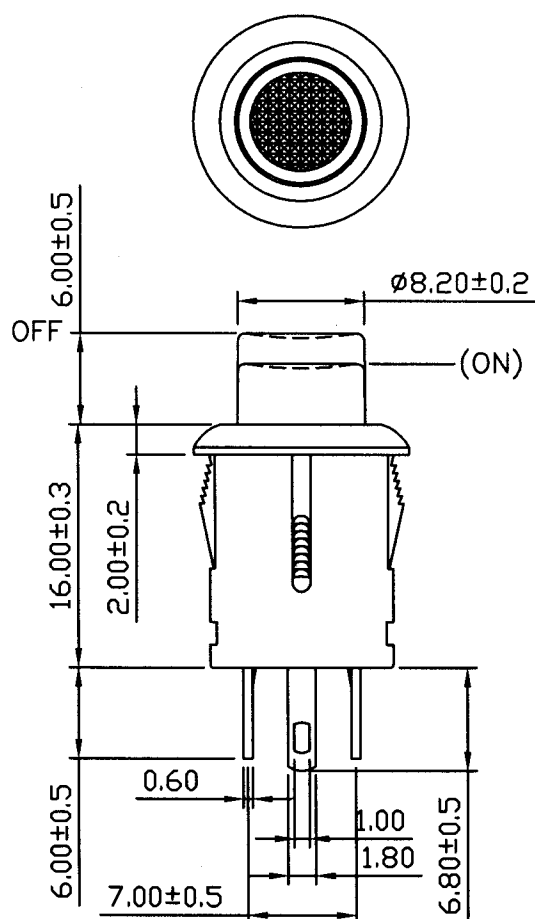

C8\R13\R13-548AL-05(1830566)_2

01/24/'08	曹盈芳	UL安規通過3A125VAC,1.5A250VAC,追加印刷			△	
09/24/'07	李日紅	黑底座1,2端子孔刻字,修改圖面與實物相符合			△	
Date	Name	Descriptions			NO	
Drawn	Checked	Approved	SCI BOM No.	1830566	Model Name	PUCH SWITCH
曹盈芳			Customer No.		Model No.	R13-548AL-05
01/24/'08	1/28/08	1/28/08	Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.	
						REV. 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Shin Chin:](#)

[R13-548AL-05-BRR](#)