

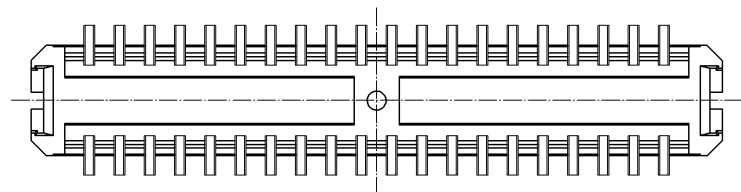
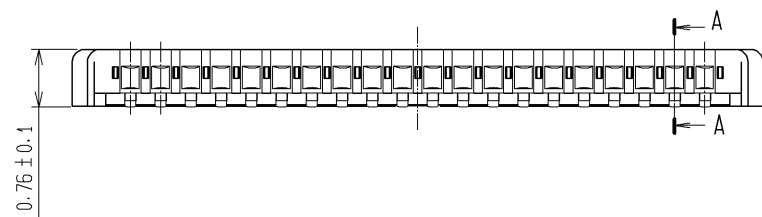


Sep.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

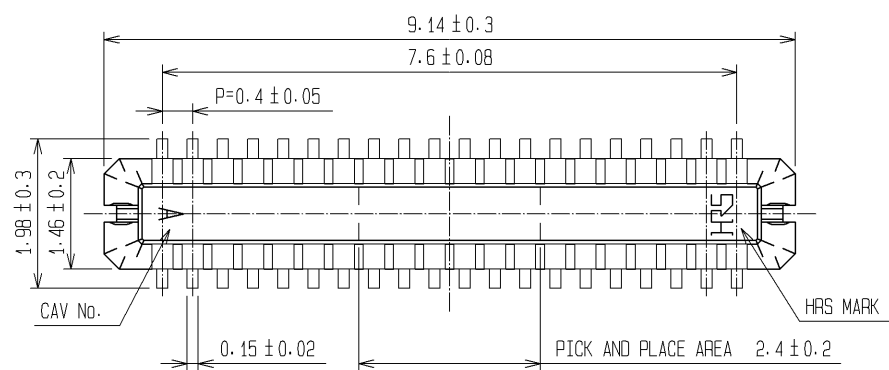


- NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 1000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 mm AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 mm AT MIN SHALL BE EMPTY.
4. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05μm MIN.
SMT LEAD : GOLD 0.05μm MIN.
UNDERPLATING : NICKEL 1μm MIN.
(SURFACE : SEALING)
5. PEEL FORCE OF COVER TAPE REFERS TO JIS C 0806.

RECOMMENDED METAL MASK OPENING PATTERN


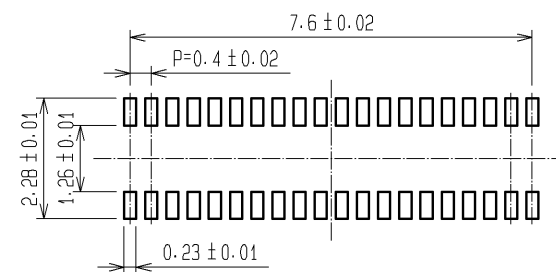



RECOMMENDED SOLDER PASTE THICKNESS: 120μm

RECOMMENDED PATTERN

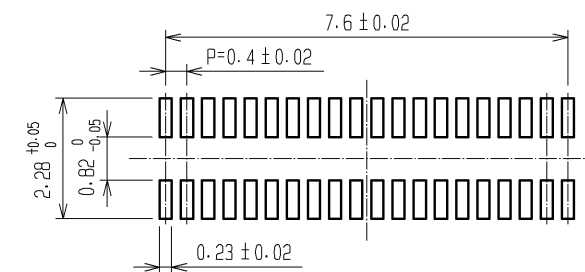


ENGAGEMENT FIGURE

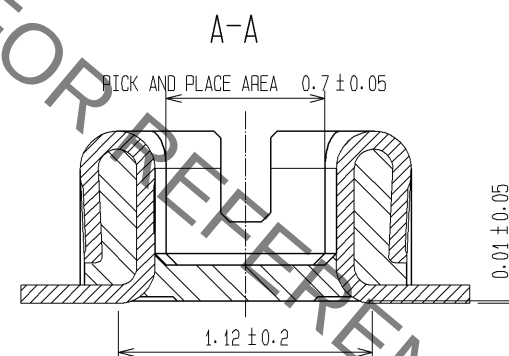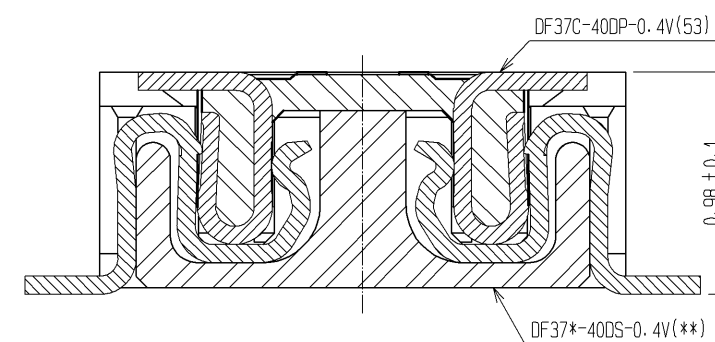

2	PHOSPHOR BRONZE	4	PS	PLASTIC REEL (BLACK)			
1	LCP	UL94V-0, BLACK	4	POLYESTER	CLEAR(COVER TAPE)		
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	CLEAR(EMBOSSED CARRIER TAPE)		
UNITS mm		SCALE FREE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.							
		APPROVED : KH. IKEDA		08.12.25	DRAWING NO.	EDC3-308602-02	
		CHECKED : TS. MIYAZAKI		08.12.25	PART NO.	DF37C-40DP-0.4V(53)	
		DESIGNED : RT. SHIMIZU		08.12.24	CODE NO.	CL684-3027-6-53	
DRAWN : AK. AOYAGI		08.12.24					

Sep.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

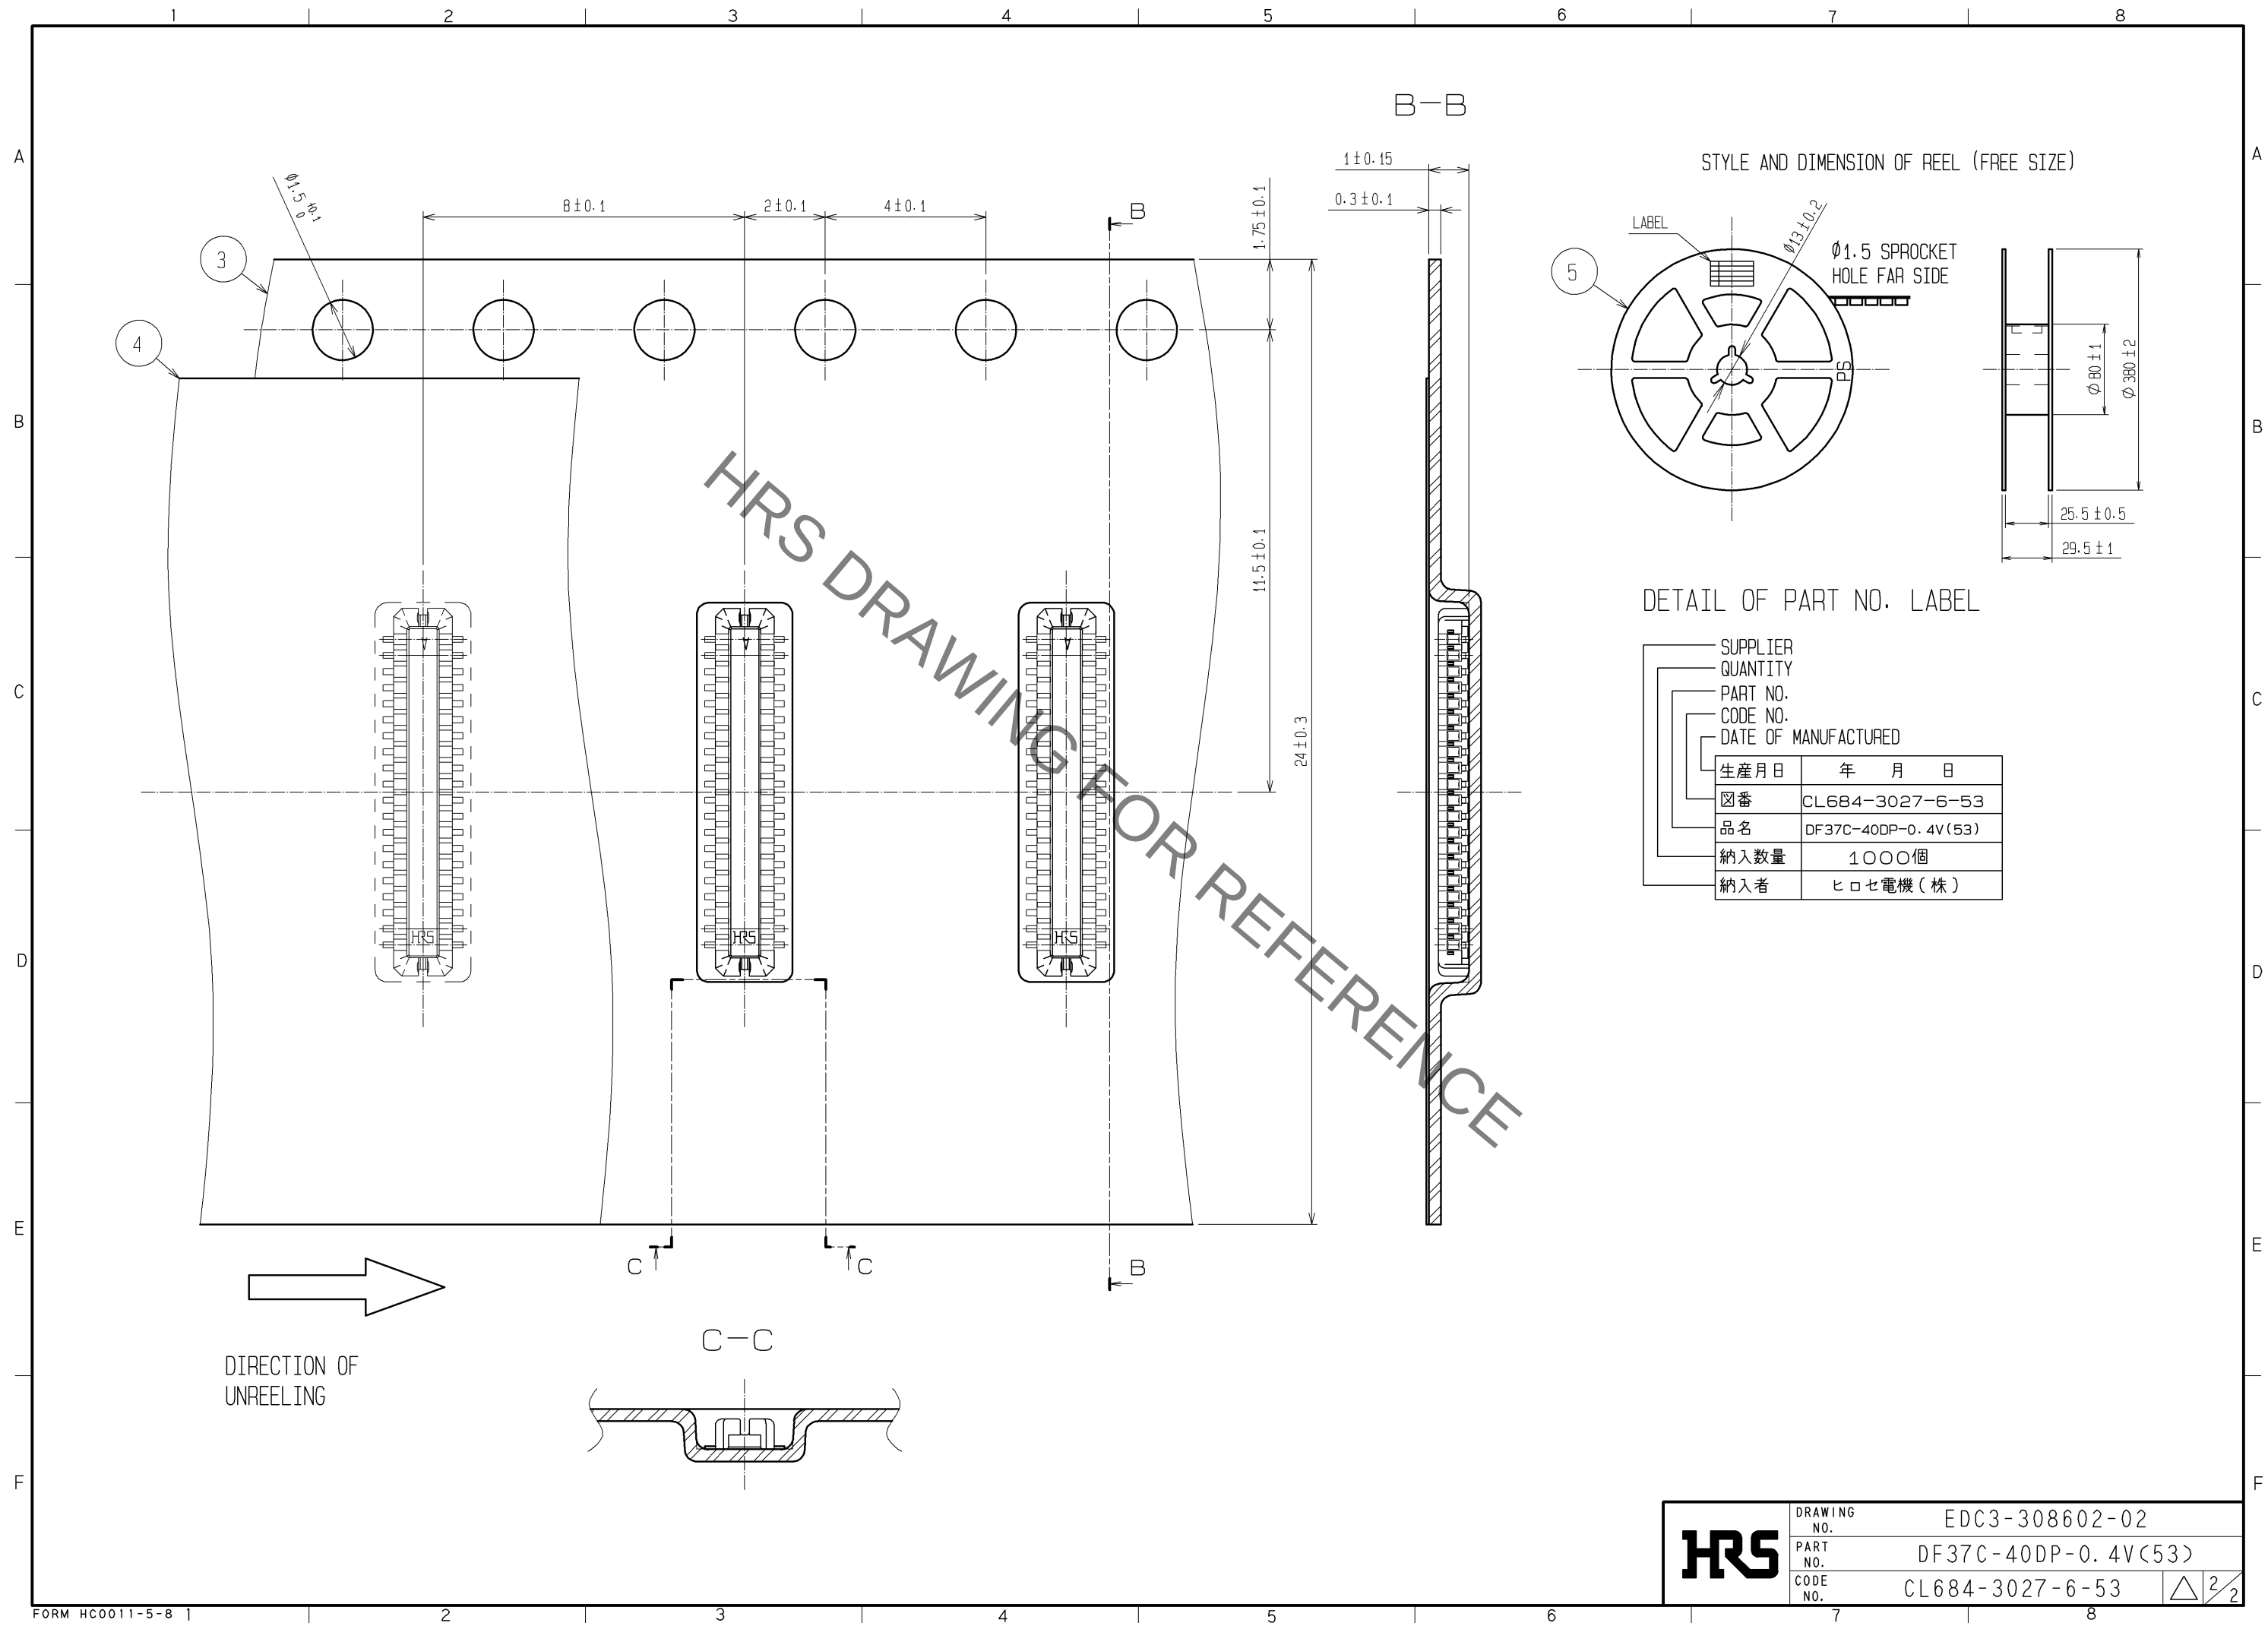

HRS	DRAWING NO.	EDC3-308602-02		
	PART NO.	DF37C-40DP-0.4V(53)		
	CODE NO.	CL684-3027-6-53	$\triangle$	$\frac{2}{2}$