

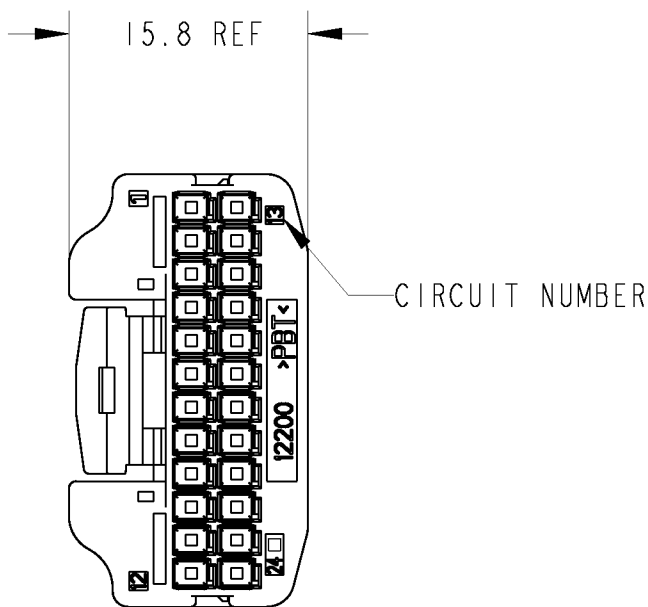
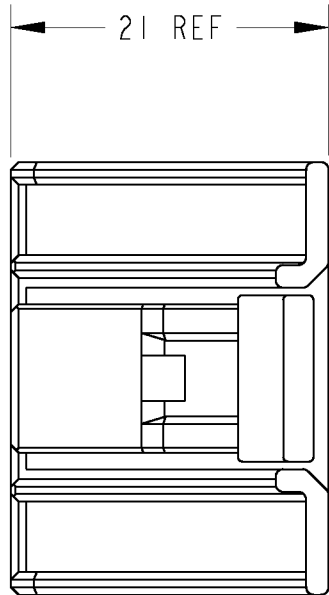


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J			CI	REVISED PER ECO-11-005140	05APR2011	RK

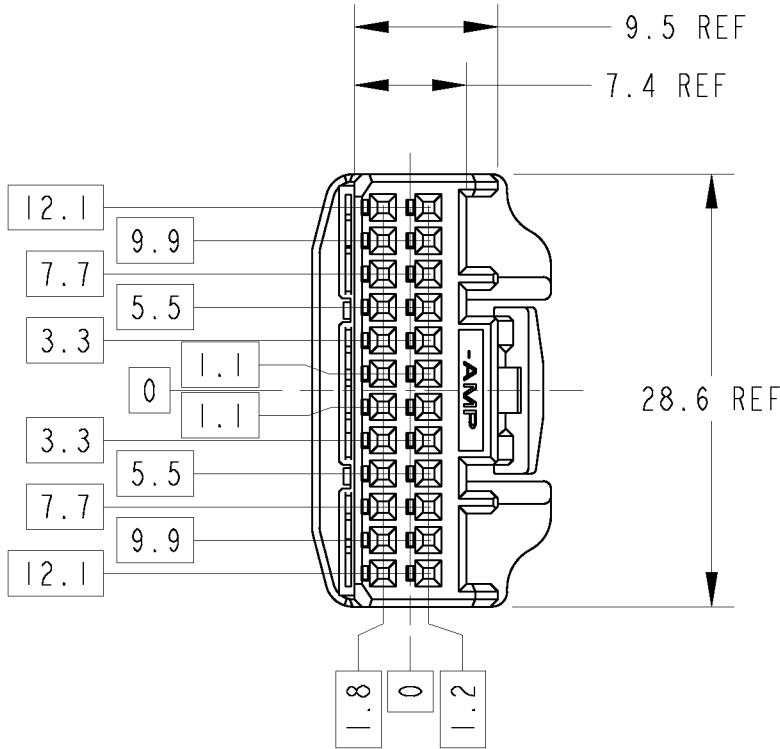

POS 極数	CAP ASSEMBLY PART NO キャップ 型番
24	1318853-1

		TERMINAL NO 端子型番	APPLICABLE WIRE RANGE 適用電線
SIGNAL 025	TIN	1123343-1	AVSS/CAVUS 0.3~0.5mm ² AVSSH-f 0.3~0.5mm ² CAVS 0.22~0.5mm ²

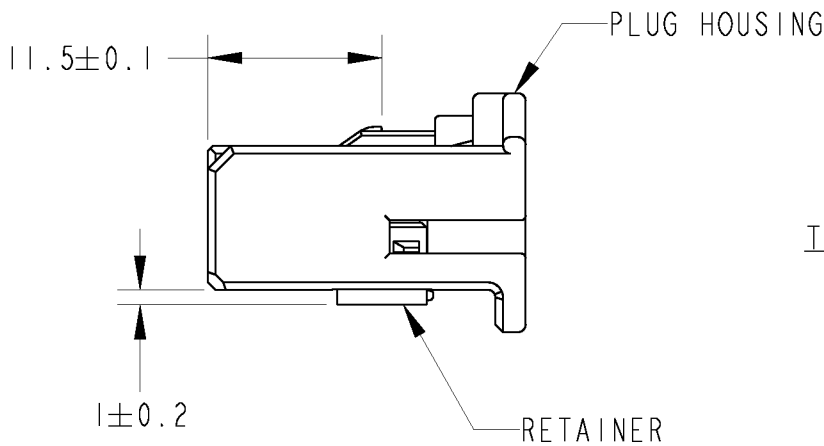

PAPER BOX ダンボール	PLASTIC BAG ビニール袋	BLACK 7	1318917-2
PAPER BOX ダンボール	PLASTIC BAG ビニール袋	NATURAL 7	1318917-1
OUTER 外装	INNER 内装	COLOR	PART NUMBER
PACKING STYLE 梱包形態			

1. RETAINER SHOULD BE SET TO THE PRE- ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER
2. THE RETENTION LATCH OF THE RETAINER MUST BE OUT SIDE OF PLUG HOUSING WHEN PRE-ASSEMBLY
3. RETAINER RETENTION FORCE FROM HOUSING : 20N MIN
4. INSTRUCTION SHEET NO : 411-5928
5. PART NUMBER OF CAP HOUSING TO BE MATED : SEE TABLE -1
6. APPLIED TERMINAL : SEE TABLE -2
7. RETAINER IS THE SAME COLOR AS HOUSING.

1. プラグハウジングにリテーナーを仮止して出荷する
2. 仮係止時リテーナー突起がハウジングの外側に出ていること
3. リテーナーの仮係止保持力は 20N 以上
4. 取扱説明書 NO : 411-5928
5. 嵌合相手型番は TABLE -1参照
6. 適用端子は TABLE -2参照
7. リテーナーはハウジング本体と同色とする。

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: mm

MATERIAL
材料 PBT

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差 ±0.3

0-PLC ±
1-PLC ±0.1
2-PLC ±0.01
3-PLC ±0.001
4-PLC ±0.0001
ANGLES ±3'00"

FINISH
仕上 SEE TABLE-3

DWN N.YASUDA 08MAR00

CHK N.SAI 10MAR00

APVD N.SAI 10MAR00

PRODUCT SPEC 108-5668

APPLICATION SPEC 114-5250

WEIGHT 3.68 g

CUSTOMER DRAWING

TE Connectivity

025 SERIES 24POSITION
PLUG HOUSING ASSEMBLY

SIZE A3 CAGE CODE 00779 DRAWING NO C-1318917

SCALE 2:1 SHEET 1 OF 1 REV CI

NAME 025 SERIES 24POSITION
PLUG HOUSING ASSEMBLY

RESTRICTED TO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1318917-2](#)