




FCI Sealed 24 Way APEX Hybrid (1.5 mm/2.8 mm) Connection System

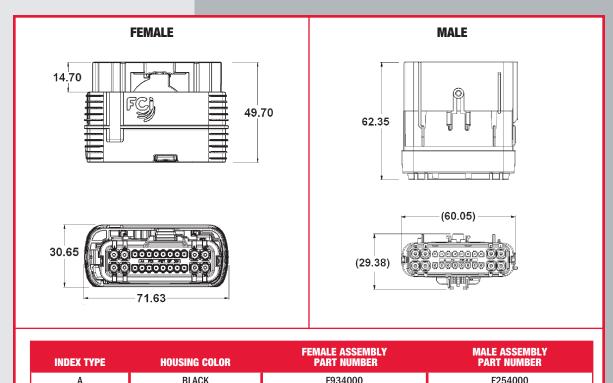

A	BLACK	F934000	F254000
В	GRAY	F044000	F354000
С	BROWN	F144000	F454000
D	GREEN	F244000	F554000

APPLICATION NOTES:

APEX 150 CAVITY DESIGNATIONS: CAVITIES 3,4,5,6,7,8,9,10 and 15,16,17,18,19,20,21,22

APEX 2.8 CAVITY DESIGNATIONS: CAVITIES 1,2,11,12,13,14,23,24

ALLOWABLE WIRE SIZE RANGE FOR 1.5 mm CAVITIES: 22-16 AWG TXL (1.50 mm min. to 2.35 mm max.)

ALLOWABLE WIRE SIZE RANGE FOR 2.8 mm CAVITIES: 18-12 AWG TXL (1.91 mm min. to 3.30 mm max.)

ASSOCIATED COMPONENTS: CAVITY PLUG FOR APEX 150 CAVITIES: 54241629 CAVITY PLUG FOR FEMALE APEX 2.8 CAVITIES: 54240002 CAVITY PLUG FOR MALE APEX 2.8 CAVITIES: 54240003

FEATURES CHRYSLER TYPE CLIP SLOT

www.ttiinc.com/transportation

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Aptiv: <u>F254000</u> <u>F254000-B</u>