



- EMI, RFI, ESD Protection
- Grounding Straps
- Engine Dress-Up
- Complies With
CID A-A-59569
- Extreme Blowout
Protection
- Expands For Easy
Installation
- Cut And Abrasion
Resistant



Cut Cleanly
Scissors

Material	Tinned Copper
Grade	MBN
Wire Thickness	.005" - .010"

Nominal Size	Part #	Wall Thickness	Wire Thickness	Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1/16"	MBN0.06SV	0.013"	0.005"	250'	100'	Silver	0.40
7/64"	MBN0.11SV	0.013"	0.005"	250'	100'	Silver	0.80
1/8"	MBN0.13SV	0.013"	0.005"	250'	100'	Silver	1.00
5/32"	MBN0.16SV	0.013"	0.005"	250'	100'	Silver	2.10
11/64"	MBN0.17SV	0.013"	0.005"	250'	100'	Silver	1.35
13/64"	MBN0.20SV	0.020"	0.008"	250'	100'	Silver	2.50
1/4"	MBN0.25SV	0.013"	0.005"	250'	100'	Silver	2.20
3/8"	MBN0.38SV	0.013"	0.005"	250'	100'	Silver	3.30
1/2"	MBN0.50SV	0.013"	0.005"	100'	50'	Silver	3.50
5/8"	MBN0.63SV	0.016"	0.006"	100'	50'	Silver	3.60
25/32"	MBN0.78SV	0.013"	0.005"	100'	50'	Silver	7.35
7/8"	MBN0.88SV	0.025"	0.010"	100'	50'	Silver	10.30
1"	MBN1.00SV	0.025"	0.010"	100'	50'	Silver	13.15
1 1/8"	MBN1.13SV	0.025"	0.010"	100'	50'	Silver	13.80
1 1/4"	MBN1.25SV	0.025"	0.010"	100'	50'	Silver	16.50
1 3/8"	MBN1.38SV	0.025"	0.010"	100'	50'	Silver	16.90
1 1/2"	MBN1.50SV	0.025"	0.010"	100'	50'	Silver	18.40
2"	MBN2.00SV	0.025"	0.010"	100'	50'	Silver	22.70
2 1/4"	MBN2.25SV	0.025"	0.010"	100'	50'	Silver	23.60


Tinned Copper Sleeve For Shielding, Grounding And Decoration. Provides Shield Coverage of 90% Minimum!


Our skill with braided sleeving extends to many materials including metal braid for a variety of applications. Our tinned copper braid is perfect for shielding on harnesses and cables. Wire conforms to ASTM-B 33.

The material is also great for hose covering on hot rods and motorcycles.


(This product was previous known as Metal Braid.)

Colors Available:
Silver (SV)

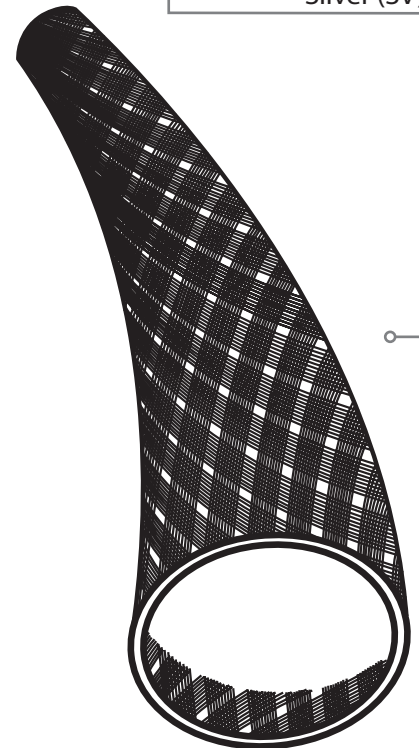

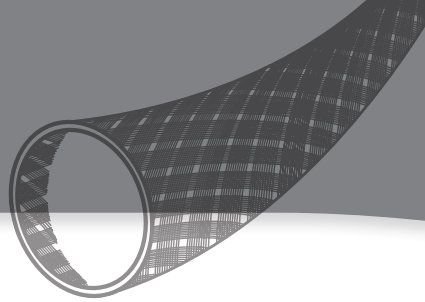

Melt Point
ASTM D-2117
1,828°F (998°C)

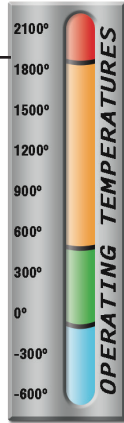

CHEMICAL RESISTANCE

- 1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	5
Strong Oxidants _____	5
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	2
Fungus ASTM G-21 _____	2
Halogen Free _____	Yes
RoHS _____	Yes

Nominal Size	Part #	AWG of Ends	Carriers	Wires Per Carrier	Current Capacity Amps
1/16"	MBN0.06SV	36	24	2	11
7/64"	MBN0.11SV	36	24	4	19
1/8"	MBN0.13SV	36	24	5	25
5/32"	MBN0.16SV	36	24	10	40
11/64"	MBN0.17SV	36	24	7	32
13/64"	MBN0.20SV	32	24	5	46
1/4"	MBN0.25SV	36	24	16	53
3/8"	MBN0.38SV	36	48	8	53
1/2"	MBN0.50SV	36	48	11	62
*5/8"	MBN0.63SV	34	48	8	64
25/32"	MBN0.78SV	36	48	18	88
7/8"	MBN0.88SV	30	48	7	100
1"	MBN1.00SV	30	48	8	120
1 1/8"	MBN1.13SV	30	48	9	130
*1 1/4"	MBN1.25SV	30	48	10	145
1 3/8"	MBN1.38SV	30	48	11	150
1 1/2"	MBN1.50SV	30	48	12	165
2"	MBN2.00SV	30	48	14	180
*2 1/4"	MBN2.25SV	30	48	16	190

*Not on Spec - CID A-A-59569 (formerly Mil Spec QQB-575)

PHYSICAL PROPERTIES

Monofilament Diameter _____	.005-.010
ASTM D-204	
Flammability Rating _____	Non Flammable
Recommended Cutting _____	Shears
Colors _____	1
Wall Thickness _____	.013-.025
Specific Gravity ASTM D-792 _____	8.9
Moisture Absorption _____	NA
% ASTM D-570	

FLAMMABILITY

Rating _____ Non Flammable