


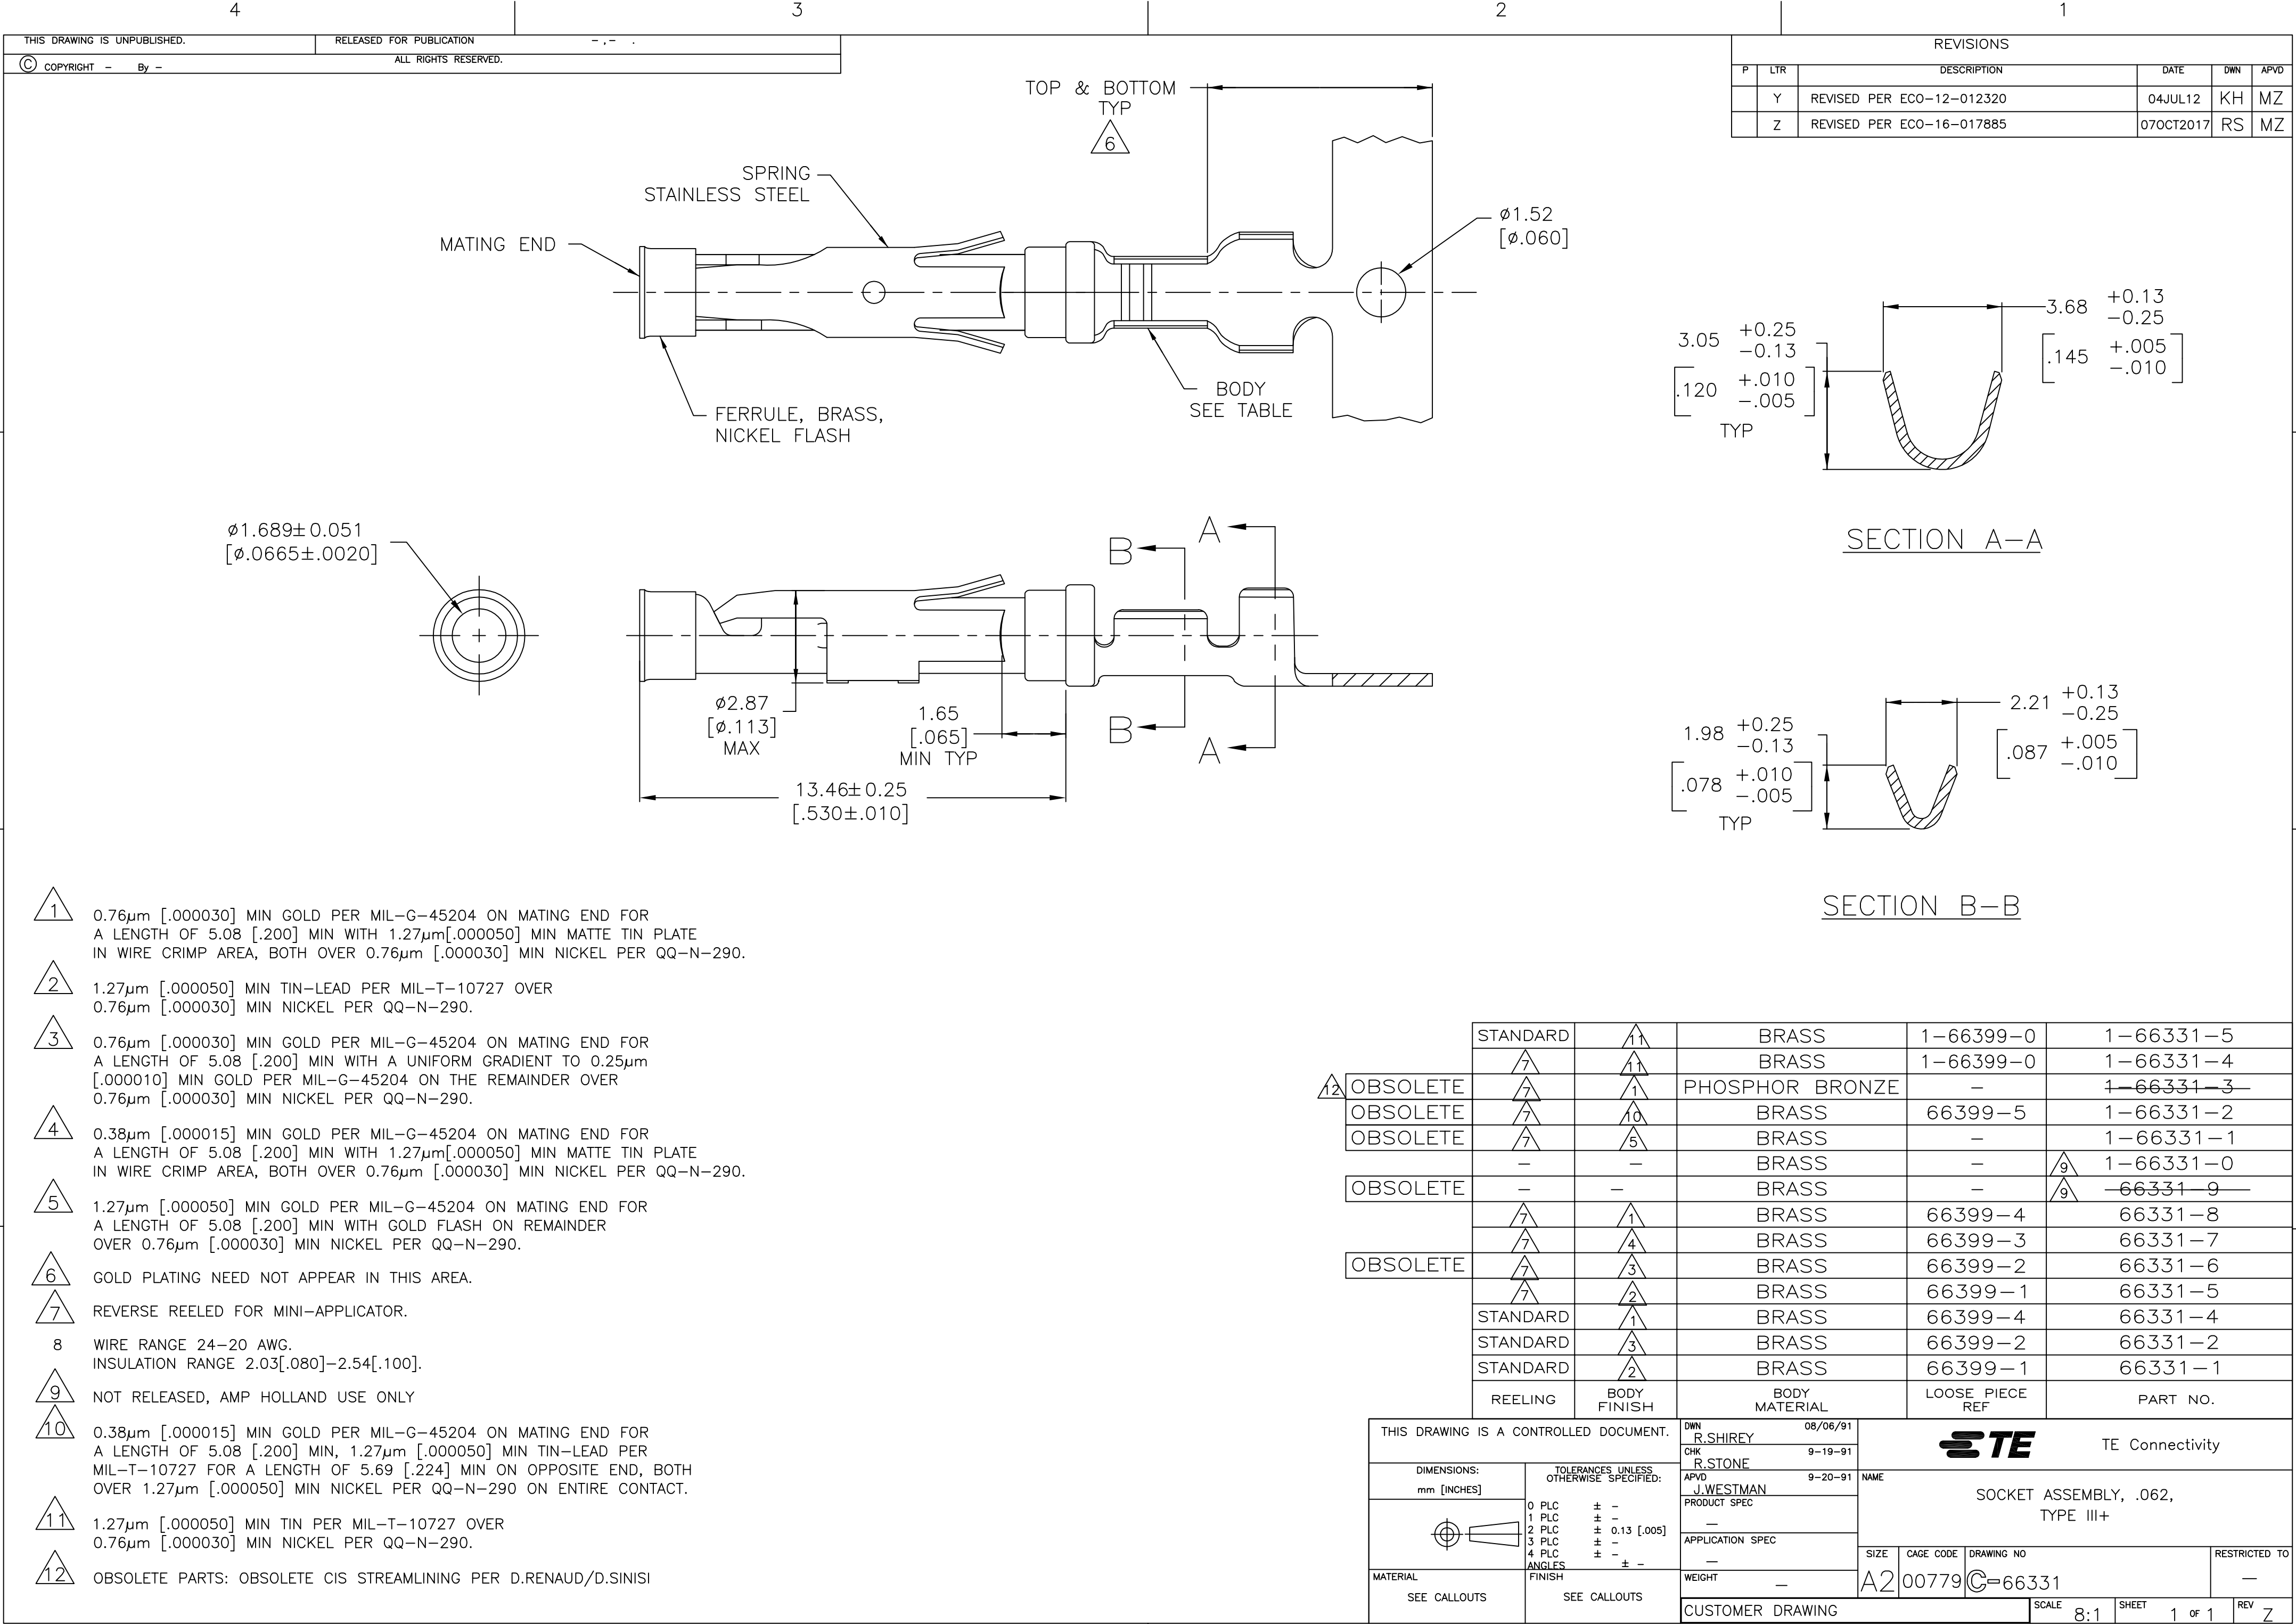

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y	REVISED PER ECO-12-012320	04JUL12	KH	MZ
	Z	REVISED PER ECO-16-017885	07OCT2017	RS	MZ

- 1 0.76µm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27µm[.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 2 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 3 0.76µm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25µm [.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 4 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27µm[.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 5 1.27µm [.000050] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON REMAINDER OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 6 GOLD PLATING NEED NOT APPEAR IN THIS AREA.
- 7 REVERSE REELED FOR MINI-APPLICATOR.
- 8 WIRE RANGE 24-20 AWG. INSULATION RANGE 2.03[.080]-2.54[.100].
- 9 NOT RELEASED, AMP HOLLAND USE ONLY
- 10 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 11 1.27µm [.000050] MIN TIN PER MIL-T-10727 OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△12		STANDARD	△11	BRASS	1-66399-0	1-66331-5
		△7	△11	BRASS	1-66399-0	1-66331-4
	OBSOLETE	△7	△1	PHOSPHOR BRONZE	-	1-66331-3
	OBSOLETE	△7	△10	BRASS	66399-5	1-66331-2
	OBSOLETE	△7	△5	BRASS	-	1-66331-1
		-	-	BRASS	-	△9 1-66331-0
	OBSOLETE	-	-	BRASS	-	△9 66331-9
		△7	△1	BRASS	66399-4	66331-8
		△7	△4	BRASS	66399-3	66331-7
	OBSOLETE	△7	△3	BRASS	66399-2	66331-6
		△7	△2	BRASS	66399-1	66331-5
		STANDARD	△1	BRASS	66399-4	66331-4
	STANDARD	△3	BRASS	66399-2	66331-2	
	STANDARD	△2	BRASS	66399-1	66331-1	
	REELING	BODY FINISH	BODY MATERIAL	LOOSE PIECE REF	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.SHIREY 08/06/91	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK R.STONE 9-19-91			
		APVD J.WESTMAN 9-20-91	NAME SOCKET ASSEMBLY, .062, TYPE III+		
		PRODUCT SPEC			
		APPLICATION SPEC	SIZE A2 CAGE CODE 00779 DRAWING NO C=66331 RESTRICTED TO -		
		WEIGHT -			
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS	CUSTOMER DRAWING SCALE 8:1 SHEET 1 of 1 REV Z		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66331-2](#)