




Semiconductor Fuse
 35-100A 700 Volts
 700-1200A

BIF Document
 35785308

Size

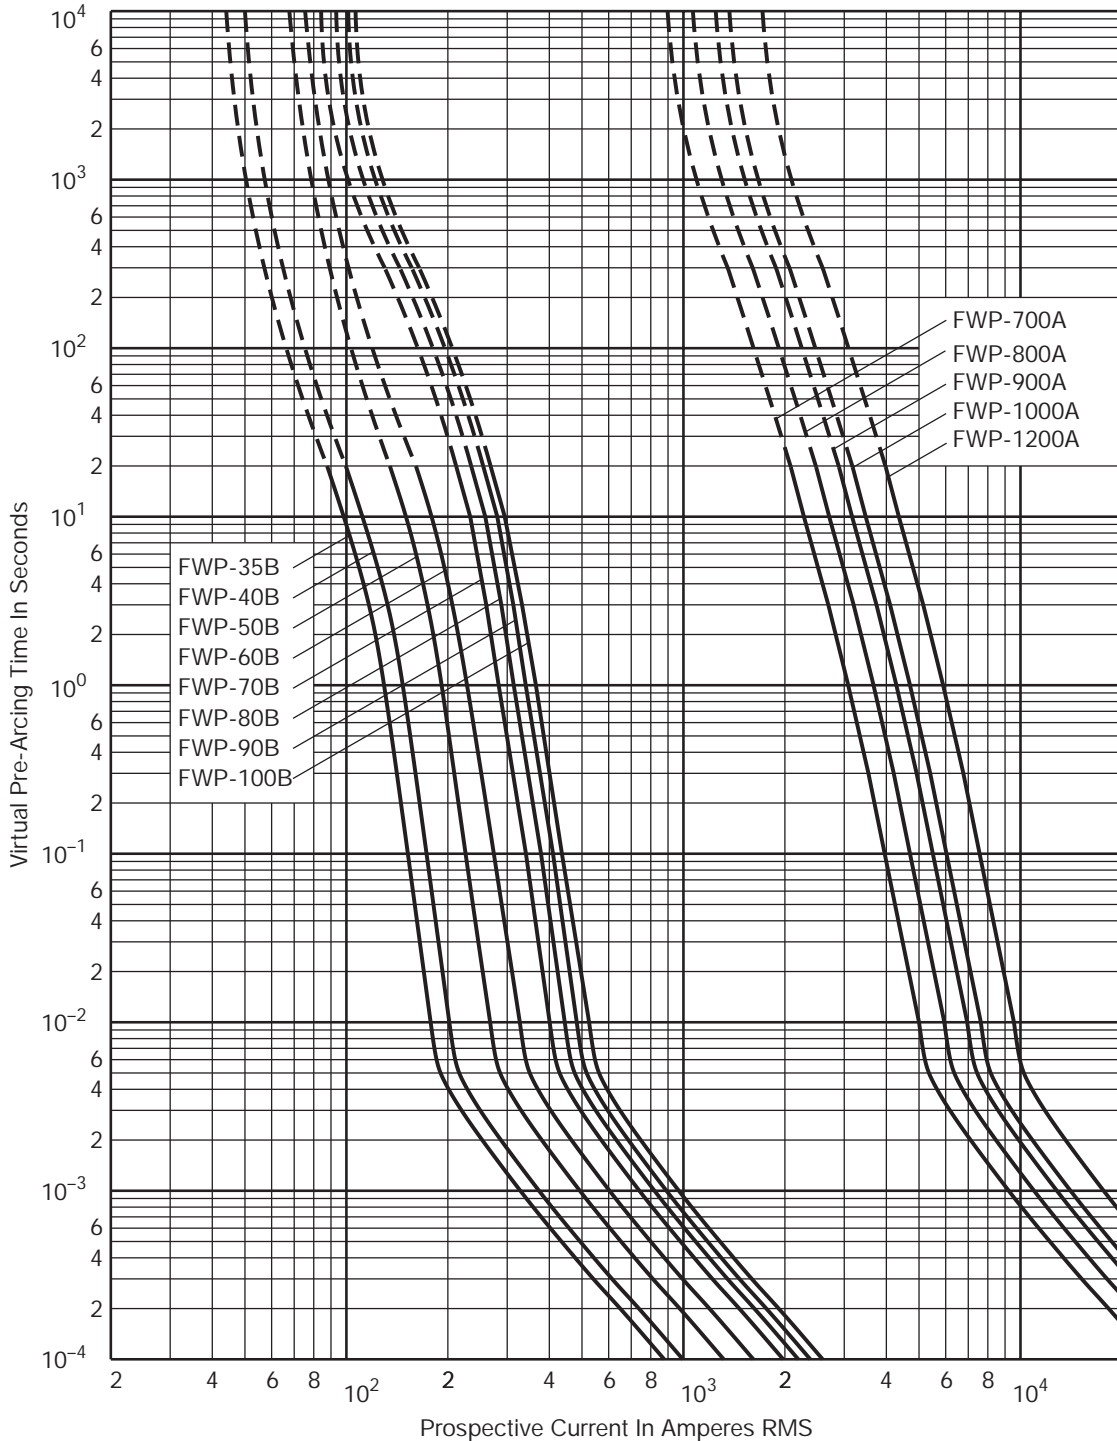

Minimum Melting Time-Current Characteristic Curves
FWP 35B-100B & 700A-1200A


Approved: **NN** Page **1 of 2**
 Rev. Date: **SEPT-97** Pub. Date: **JAN-98**



Semiconductor Fuse
 35-100A 700 Volts
 700-1200A

BIF Document
35785308

Size

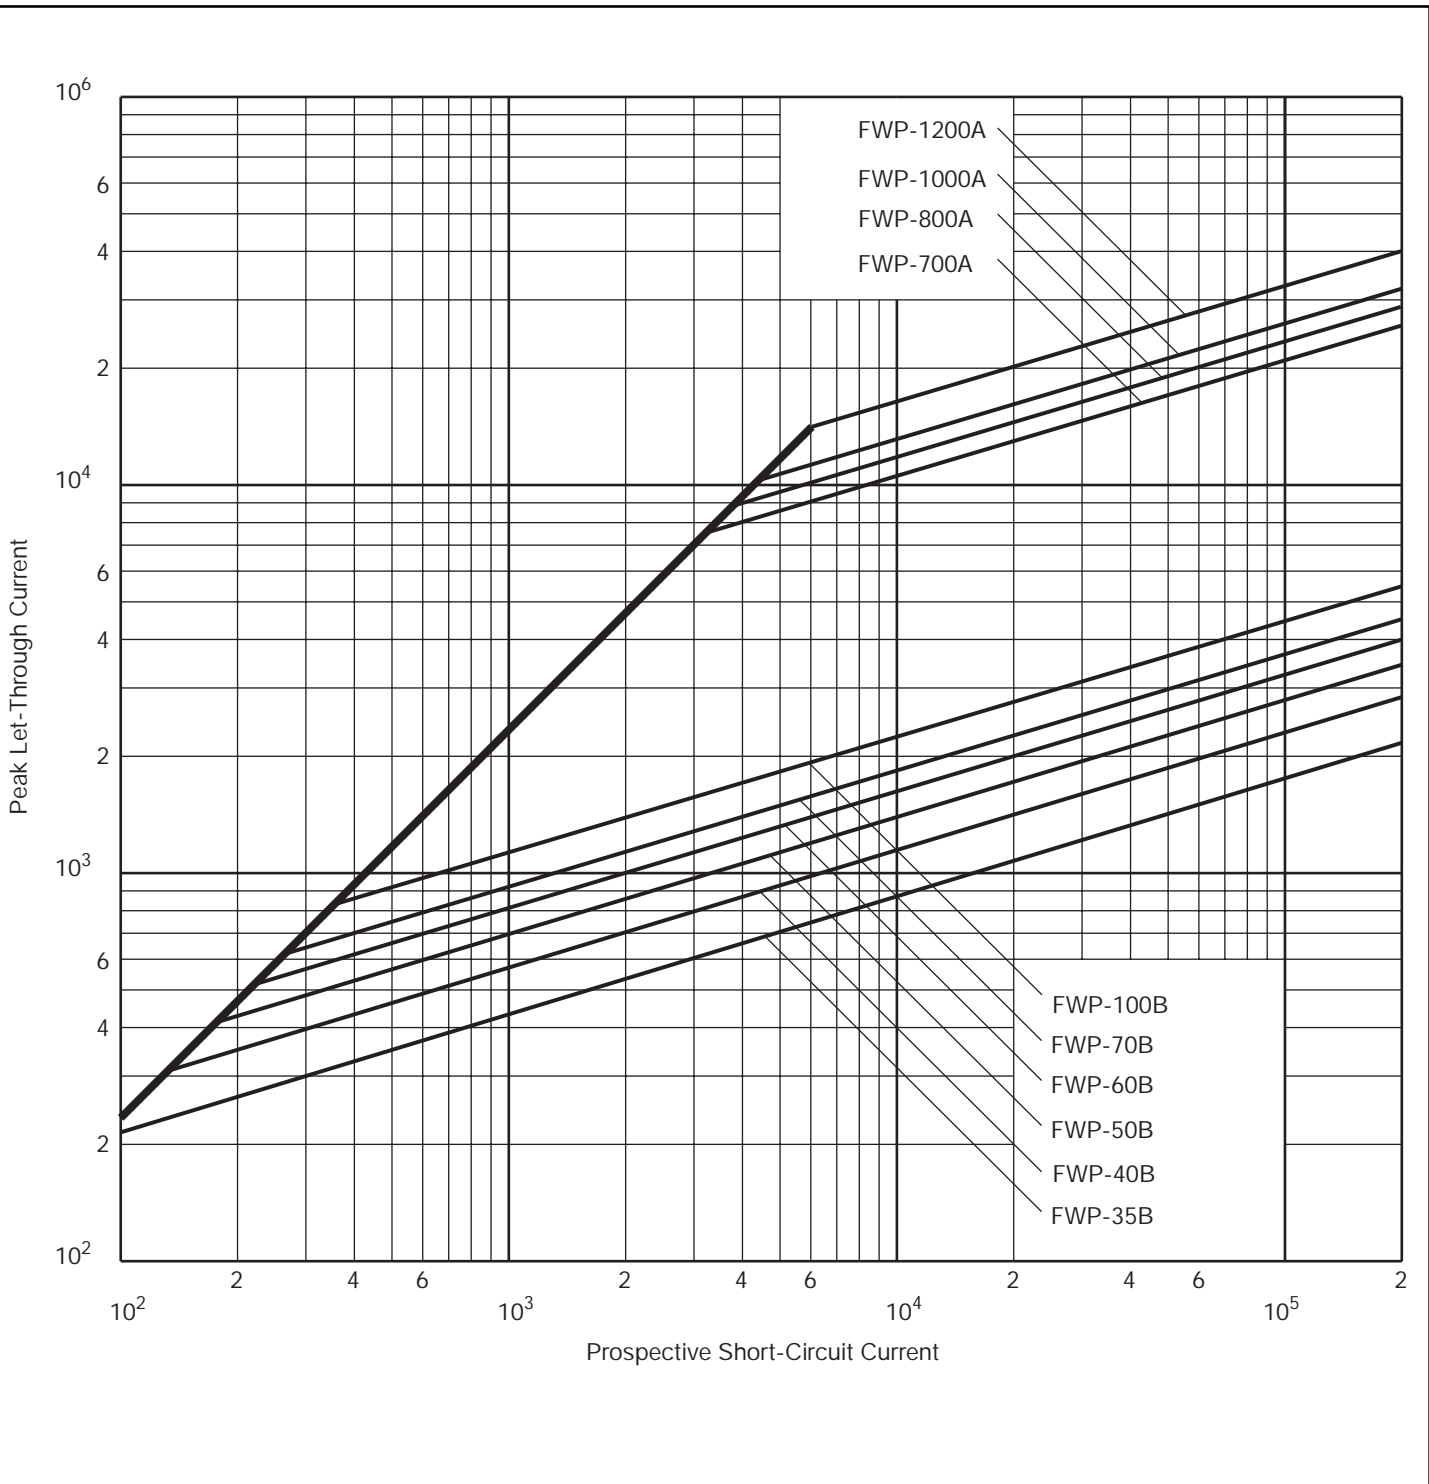

Peak Let-Through Cut-Off Current Characteristic Curves
FWP 35B-100B & 700A-1200A

Approved: **NN**
 Rev. Date: **SEPT-97**

Page **2 of 2**
 Pub. Date: **JAN-98**

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[FWP-40A](#) [FWP-80A](#)