

## ATM blade fuses



### Catalog symbol

- ATM\_

### Description

A range of UL® Listed fast-acting miniature blade fuses for automotive and low-voltage circuits.

### Ratings

- Volts: 32 Vac/dc
- Amps: 2 to 30 A
- Interrupting rating: 1 kA

### Agency information

- UL Listed, Guide FHXT, File AU169
- ISO 8820-3 / JASO D612 / SAE J2077 and J1171 ignition protection

### Materials

- Silver-plated zinc terminals and element
- Polyamide housing with UL 94 HB flammability rating

### Environmental

- Operating temperature range -40°C to +80°C, 95% RH non-condensing
- Storage temperature range -5°C to +35°C or lower, 85% RH non-condensing

### Basic catalog numbers

Cat. no. (amp)	Color code	Cat. no. (amp)	Color code
ATM-1*	Black	ATM-10	Red
ATM-2	Gray	ATM-15	Blue
ATM-3	Violet	ATM-20	Yellow
ATM-4	Pink	ATM-25	Clear
ATM-5	Tan	ATM-30	Green
ATM-7-1/2	Brown		


\* Available only in traditional and bulk pack.

### Packaging codes

Package type	Cat. no. configuration	Contents
Traditional	ATM-(amp)	5 fuses in a tin
Reload	ATM-(amp)RLD*	10 fuses in a polybag
Retail pack	BP/ATM-(amp)-RP	5 fuses in a blister card
Value pack	VP/ATM-(amp)-RP	25 fuses in a clamshell pack
Bulk pack	BK/ATM-(amp)	500 fuses in a carton

\* Not available for the 4 amp ATM fuses.

### Dimensions — in



### Operating @ 23°C\*

% of fuse amp rating	Min	Max
110%	100 hrs	—
135%	0.75 sec	600 sec
160%	0.25 sec	50.0 sec
200%	0.15 sec	5.0 sec
350%	0.04 sec	0.5 sec
600%	0.02 sec	0.1 sec

\* Fuse characteristics may vary according to the conditions under which they are used. Fuse derating with change in ambient temperature: -0.15% / 1°C.

### Features

- Halogen free and RoHS compliant
- Test points on fuse housing speeds troubleshooting
- Industry standard color coded by amp rating

### Typical applications

- Automotive
- Low voltage control circuits

### Recommended fuse holders, add-a-circuit and fuseclips


Part number	Description	Max volts/ amps	Leadwire
HHH	Add-a-circuit for additional fused circuit on a block	32V/10A	5"/#16
HHL	Inline fuse holder with cover	32V/20A	2x4"/#16
HHM	Inline fuse holder with cover	32V/30A	2x4"/#12
HHU	Water resistant inline fuse holder with cover	32V/30A	2x4"/#12
ATM-FHID	Indicating inline fuse holder with cover	32V/20A	2x4"/#16
1A5778**	PCB fuse clip	32V/15A	—
1A5779**	PCB fuse clip with nylon base	32V/15A	—

\*\* See data sheet no. 2131 for details.



Powering Business Worldwide

Time-current characteristic curves — average melt

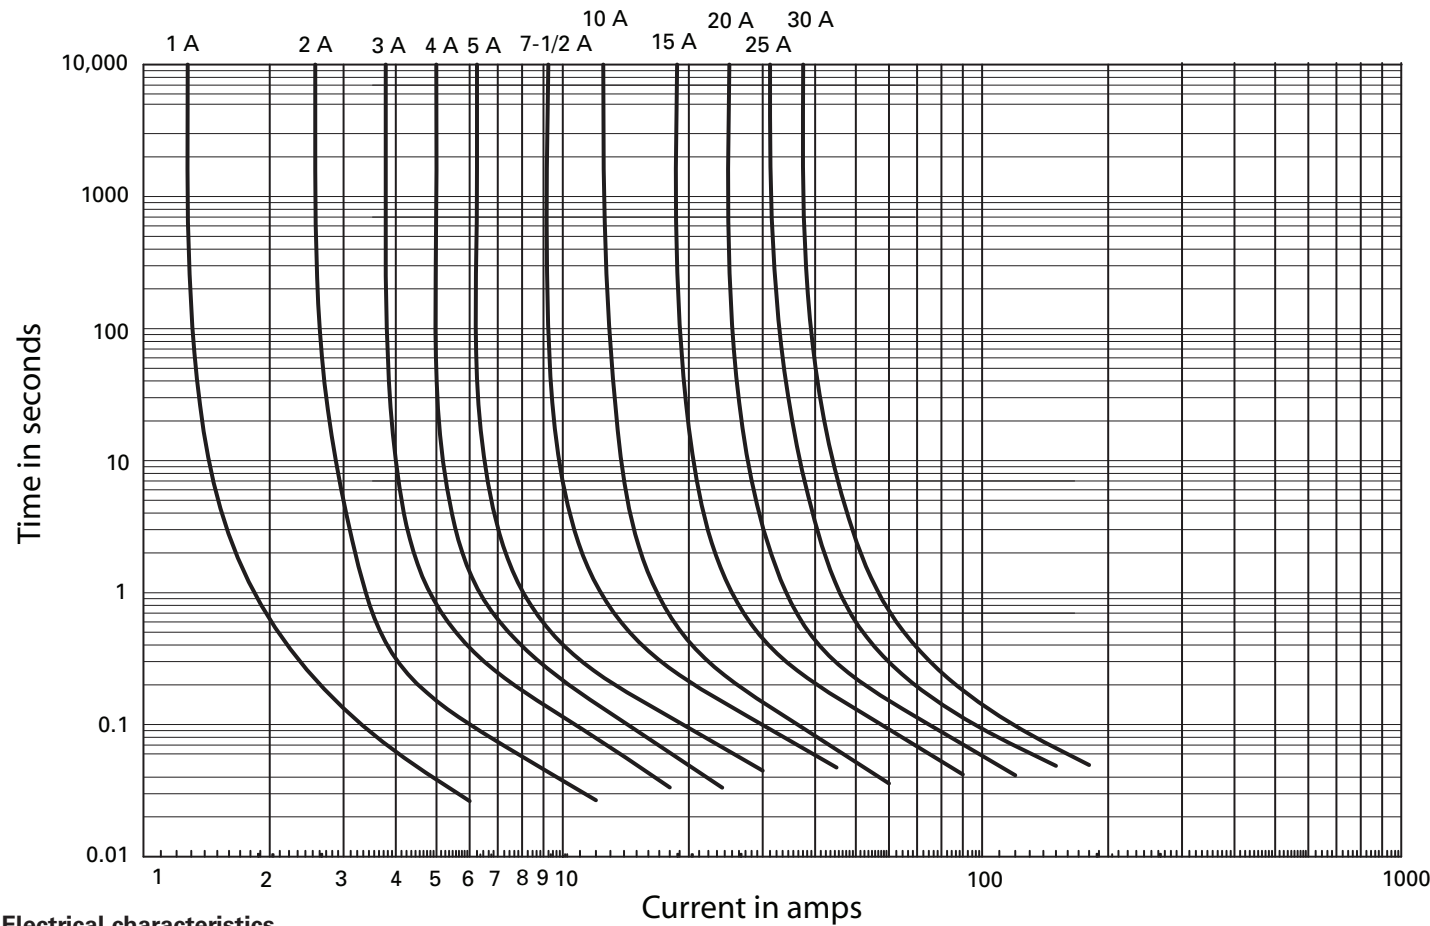

Electrical characteristics

Fuse amps	Resistance	Voltage drop
1	121 mΩ	175 mV
2	49.7 mΩ	140 mV
3	29.6 mΩ	140 mV
4	23.8 mΩ	136 mV
5 A	16.7 mΩ	112 mV
7-1/2	11.1 mΩ	112 mV
10	7.82 mΩ	106 mV
15	4.93 mΩ	99 mV
20	3.48 mΩ	95 mV
25	2.58 mΩ	92 mV
30	2.12 mΩ	86 mV

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton  
1000 Eaton Boulevard  
Cleveland, OH 44122  
Eaton.com  
  
Bussmann Division  
114 Old State Road  
Ellisville, MO 63021  
United States  
Eaton.com/bussmannseries

© 2019 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2048 — BU-SB15054  
January 2019



Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

For Eaton’s Bussmann series product information, call 1-855-287-7626 or visit: [Eaton.com/bussmannseries](http://Eaton.com/bussmannseries)

Follow us on social media to get the latest product and support information.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Eaton:

[BK/ATM-20](#) [BK/ATM-2](#) [BK/ATM-3](#) [BK/ATM-7-1/2](#) [BK/ATM-5](#) [BK/ATM-4](#) [BK/ATM-30](#) [BK/ATM-25](#) [BK/ATM-15](#)  
[BK/ATM-10](#) [BP/ATM-10-RP](#) [BP/ATM-5](#) [BP/ATM-3](#) [ATM-5LP](#) [BP/ATM-2](#) [BP/ATM-25](#) [BP/ATM-4](#) [BP/ATM-20](#)  
[BP/ATM-10](#) [BP/ATM-7-1/2](#) [BP/ATM-30](#) [BP/ATM-15](#) [ATM-7-1/2](#) [ATM-4LP](#) [ATM-3LP](#) [ATM-2LP](#) [BP-ATM-2-RP](#) [BP-](#)  
[ATM-15-RP](#) [ATM-10](#) [ATM-15](#) [ATM-2](#) [ATM-20](#) [ATM-25](#) [ATM-3](#) [ATM-30](#) [ATM-4](#) [ATM-5](#) [BK-ATM-30](#) [BK-ATM-4](#)  
[BK-ATM-5](#) [BK-ATM-7-1-2](#) [BK-ATM-15](#) [BK-ATM-20](#) [BK-ATM-2](#) [BK-ATM-10](#) [BK-ATM-25](#) [BK-ATM-3](#)