
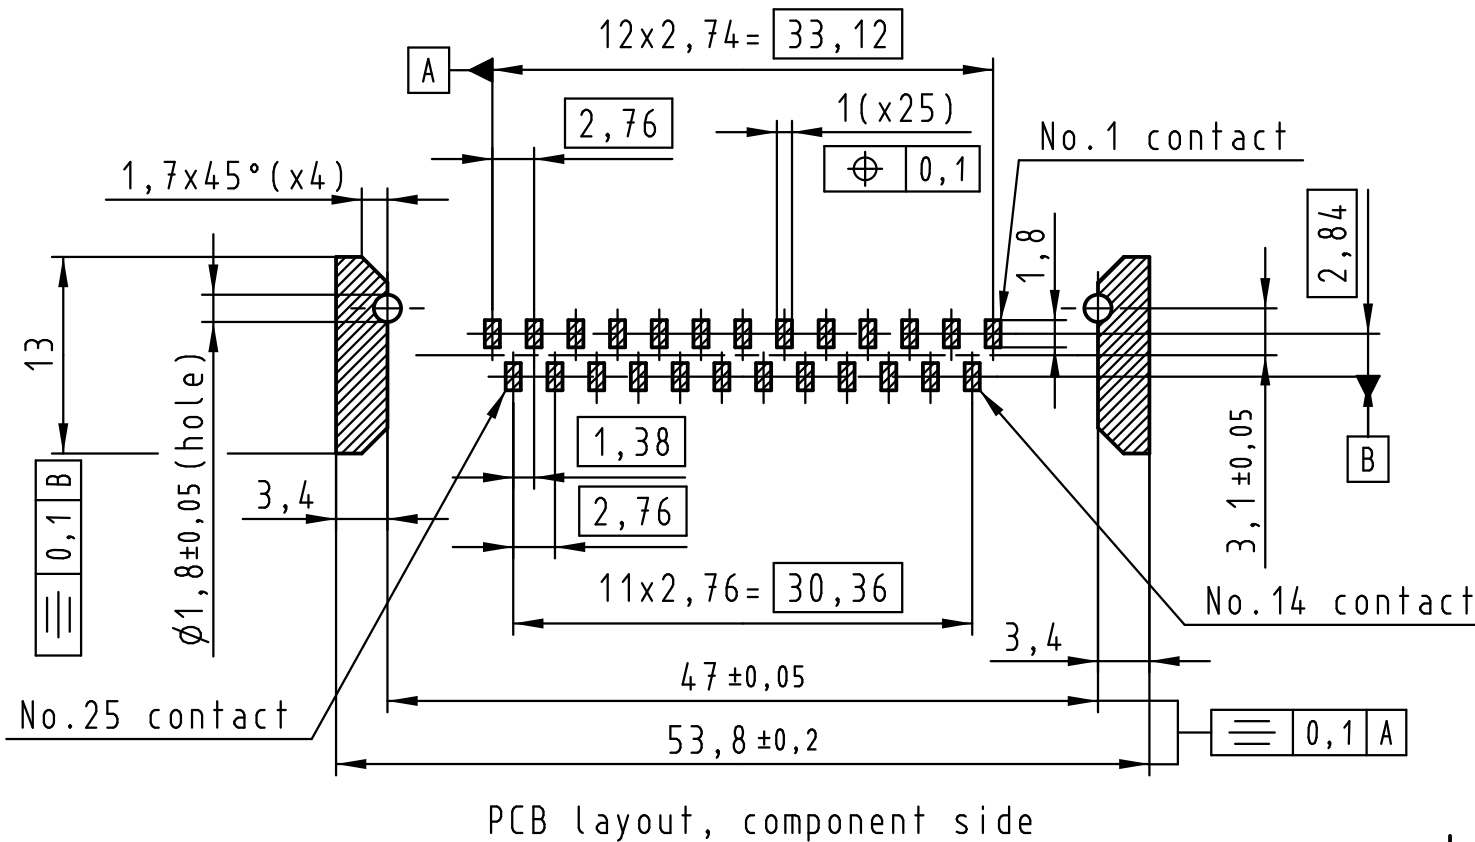
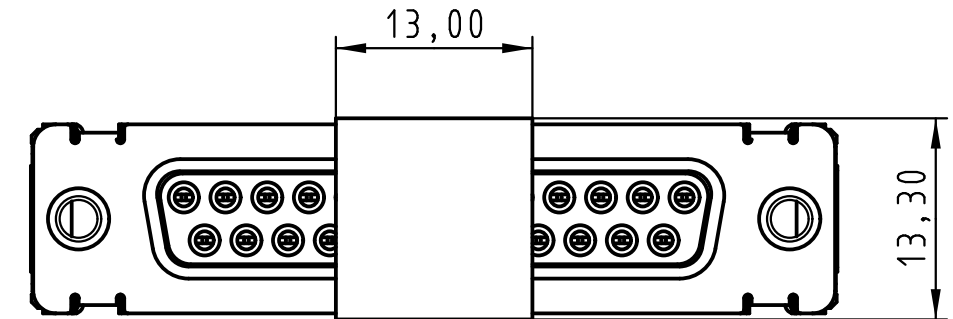
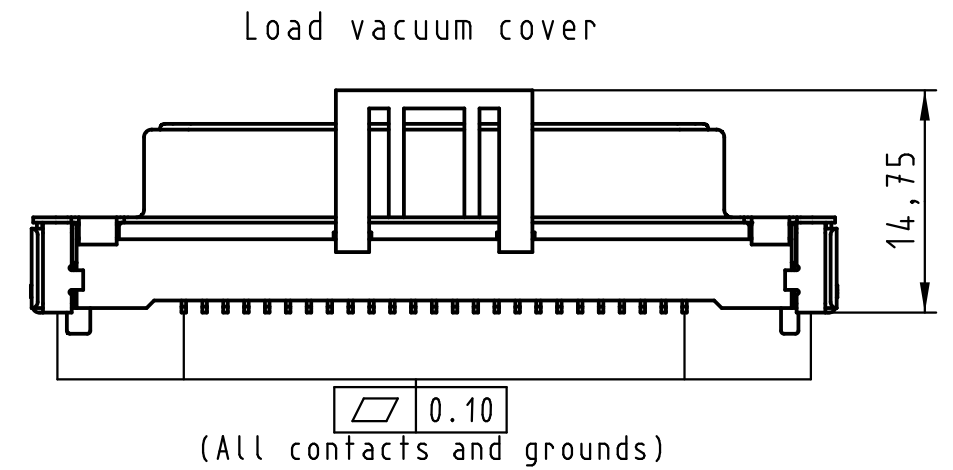
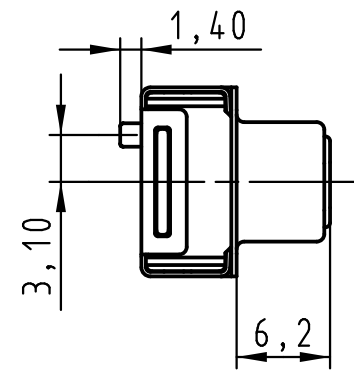
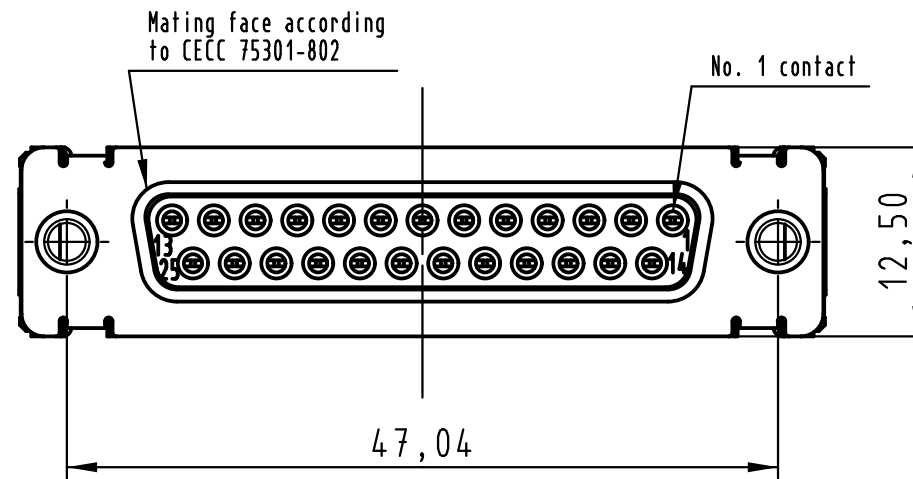


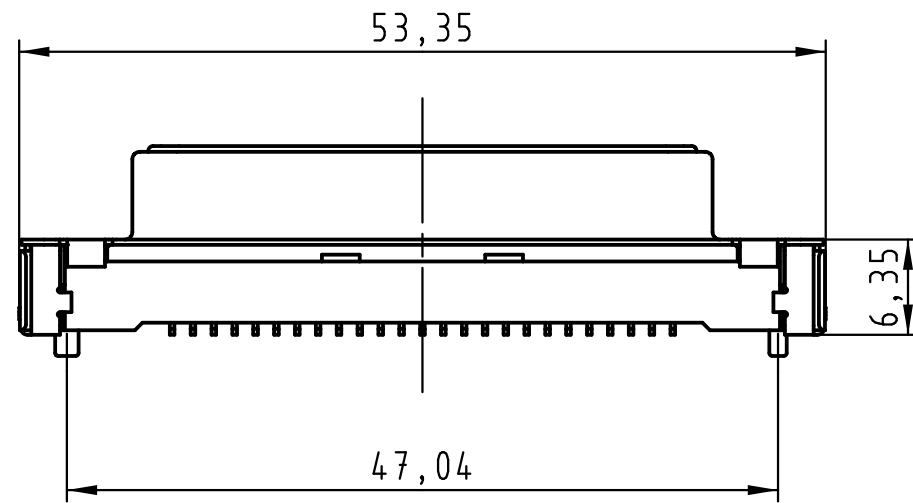


Max. Temperature: 260° during 10 seconds.




0955 315 3611 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)
0955 315 3612 741	1	4-40 UNC		
0955 315 6611 741	2	M3		
0955 315 6612 741	2	4-40 UNC		
0955 315 7611 741	3	M3		
0955 315 7612 741	3	4-40 UNC		
Part number	PL	Nut	Index designation	

 All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances				
				Dat.	Name	Scale 2 : 1	D-Sub SMT, 25 poles Female, Straight with nuts and ground pads			
			Detail.	25-Oct-11	Johnson.S					
			Insp.	17-Nov-11	Steven.W					
			Stand.	17-Nov-11	Steven.W					
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited					TB 09 55 315 x61x		Page 1 / 2
Mod.	Dat.	Name				Sub.				

All rights reserved

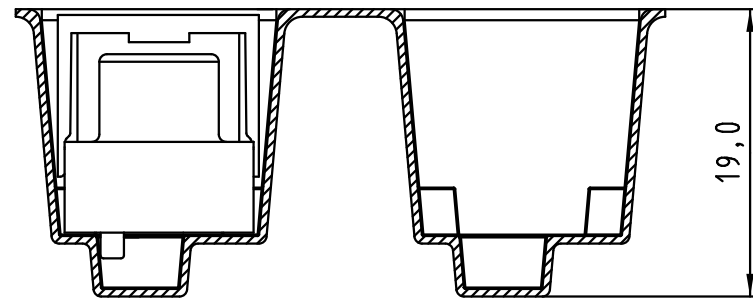

Detail A

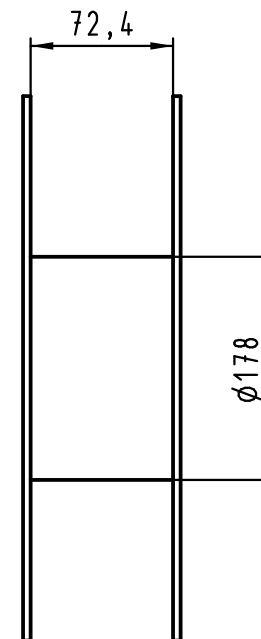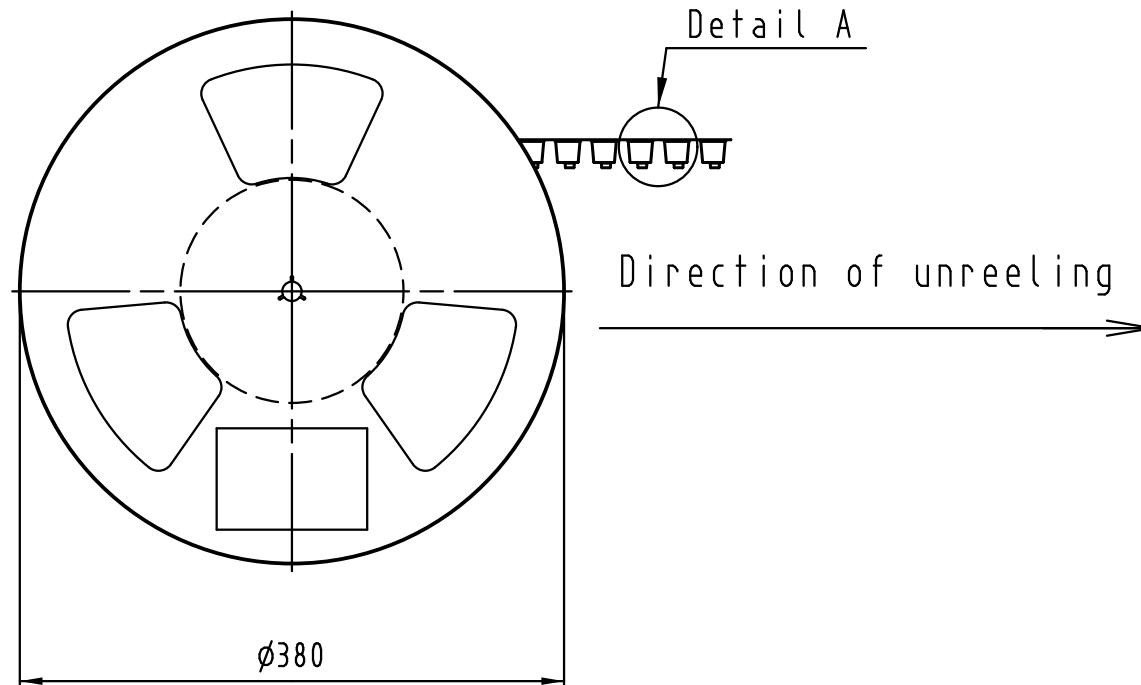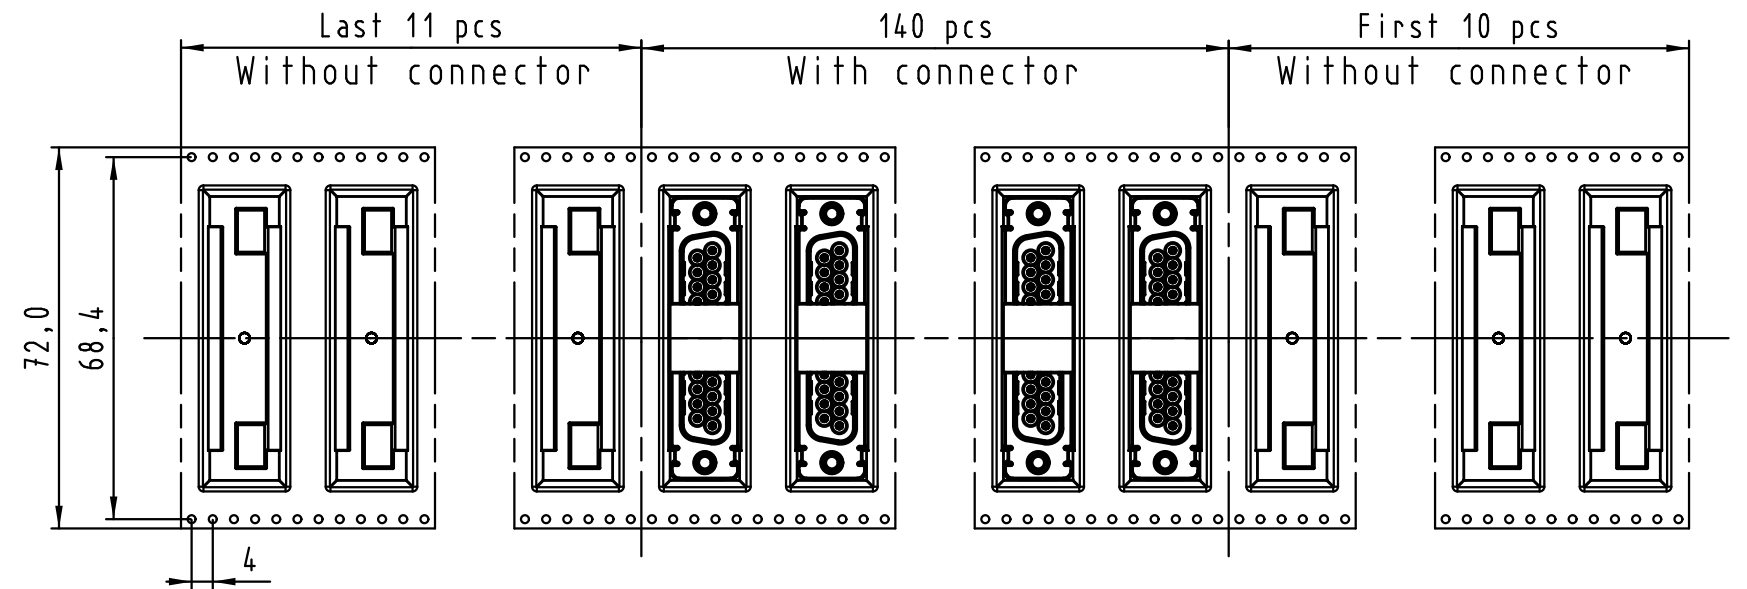

See TB 09 55 315 x61x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 315 3611 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 315 3612 741	1	4-40 UNC		
0955 315 6611 741	2	M3		
0955 315 6612 741	2	4-40 UNC		
0955 315 7611 741	3	M3		
0955 315 7612 741	3	4-40 UNC	Index designation	
Part number	PL	Nut		

 All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances	
				Dat.	Name	Scale	D-Sub SMT, 25 poles Female, Straight with nuts and ground pads
			Detail.	25-Oct-11	Johnson.S		
			Insp.	17-Nov-11	Steven.W		
			Stand.	17-Nov-11	Steven.W		TB 09 55 315 x61x
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited				
Mod.	Dat.	Name				Sub.	Page 2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09553156611741](#) [09553157612741](#) [09553157611741](#) [09553156612741](#)