

Differential current monitoring - RCM-A/50/85-264V - 2806016

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Differential current monitor in type A version for detecting pulsing AC and DC leakage currents at 50/60 Hz.

Your advantages

- ✓ Residual current detection characteristics type A (50/60 Hz)
- ✓ Detects pulsating DC and AC residual currents
- ✓ Adjustable residual response current of 30 mA to 3 A
- ✓ Adjustable pre-alarm threshold and delay time
- ✓ Actual residual current can be read via LED display
- ✓ Remote signaling for main and pre-alarm
- ✓ Residual current monitoring devices act as a form of fire prevention



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 504911
GTIN	4046356504911

Technical data

Dimensions

Height	89.7 mm
Width	71.6 mm
Depth	62.2 mm
Horizontal pitch	4 Div.

Ambient conditions

Degree of protection	IP20
	IP40 (distributor installation with cover)
Ambient temperature (operation)	-25 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

Differential current monitoring - RCM-A/50/85-264V - 2806016

Technical data

General

Housing material	Polycarbonate
Mounting type	DIN rail: 35 mm

Common characteristics

Nominal voltage U_N	85 V AC ... 264 V AC
Nominal frequency f_N	50 Hz (60 Hz)
Current consumption	< 4 VA
Max. required back-up fuse	16 A (B)
Rated response differential current I_{dyn}	3 A
Differential current acquisition characteristic	Type A (50 / 60 Hz)
Response differential current $I_{\Delta n}$	30, 100, 300, 1000, 3000 mA (adjustable)
Discrimination threshold main alarm	80 % ... 100 % (of the set response differential current $I_{\Delta n}$)
Discrimination threshold pre-alarm	10 % ... 90 % (of the main alarm threshold, adjustable)
Response time for $2 \times I_{\Delta n}$	0.1 s ... 1 s (adjustable)
Rated surge voltage resistance U_{imp}	4 kV
Overvoltage category_GRP	III
Rated voltage U_n	230 V AC
Degree of pollution	2

Connections

Connection method	Screw terminal blocks
Tightening torque	0.6 Nm
Stripping length	8 mm
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Min. conductor cross section, flexible, with ferrule	0.25 mm ²
Max. conductor cross section, flexible, with ferrule	2.5 mm ²

Remote indication contact

Connection name	Pre-alarm
Switching function	PDT contact
Connection name	Main alarm
Switching function	PDT contact
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Maximum operating voltage U_{max} AC	230 V AC

Differential current monitoring - RCM-A/50/85-264V - 2806016

Technical data

Remote indication contact


Max. operating current I_{max}	5 A ($\cos \phi > 0.9$)
Max. required back-up fuse	4 A (gL)

Standards and Regulations


Standards/specifications	DIN EN 62020
	DIN EN 60664

Drawings

Dimensional drawing

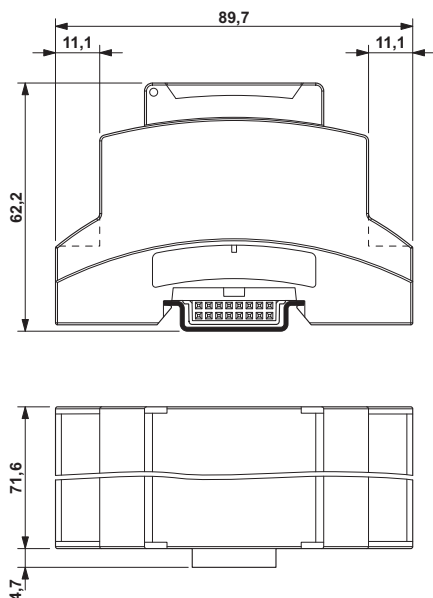

Circuit diagram



Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2806016](#)