


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0834249060](#)
Status: **Active**
Overview: [Commercial Micro-D High-Density Connectors](#)
Description: Commercial Micro-D Cable Assembly, 25 CMD-to-25 Pin D-Subminiature (Female-to-Male), 0.46m Length

Documents:
[Drawing \(PDF\)](#)
[Product Specification PS-83421-001-001 \(PDF\)](#)
[Packaging Specification PK-83422-001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Cable Assemblies
Series	83424
Assembly Configuration	Dual Ended Connectors
Connector to Connector	Commercial Micro-D-to-D-Sub
Overview	Commercial Micro-D High-Density Connectors
Product Name	Commercial Micro-D, D-Sub
UPC	822350652131
Physical	
Cable Length	0.46m
Circuits (Loaded)	25
Gender	Male-Female
Lock to Mating Part	Yes
Material - Plating Termination	Tin
Net Weight	23.215/g
Packaging Type	Bag
Plating min - Mating	0.127µm
Plating min - Termination	1.270µm
Single Ended	No
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	N/A
Wire Size AWG	28
Wire/Cable Type	PVC
Electrical	
Current - Maximum per Contact	1.0A
Shield Type	AL Foil
Shielded	Yes
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-83422-001
Product Specification	PS-83421-001-001
Sales Drawing	SD-83424-060

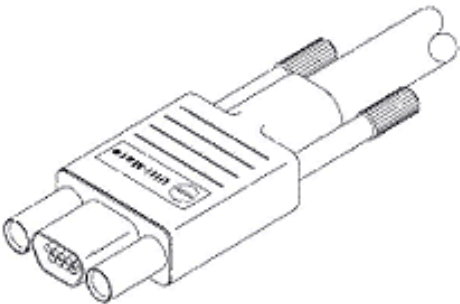

Series image - Reference only

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per - ED/108/2014 (17 Dec 2014) Halogen-Free Status Not Low-Halogen Need more information on product environmental compliance? Email productcompliance@molex.com Please visit the Contact Us section for any non-product compliance questions.	China RoHS China ROHS Not Relevant ELV Not Relevant RoHS Phthalates Not Reviewed

Search Parts in this Series
[83424](#) Series

Mates With
Ulti-Mate™ Commercial Micro D, [83612](#) ,
[83619](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[83424-9061](#) [83424-9060](#)