

Features

Regulated Converters

- 4:1 Wide Input Voltage Range
- 1.6kVDC Isolation
- UL Certified
- Efficiency up to 91%
- Six-Sided Continuous Shield
- No Minimum Load Required



RP30-FW

30 Watt
2"x1"
Single & Dual Output



Description

The RP30-FW series DC/DC converters are designed to meet to UL 60950-1 and to cUL 60950-1. This makes them ideal for all telecom and industrial applications where approved safety standards are required. The industry standard 2" x 1" package meets military standards for thermal shock and vibration tolerance.

Selection Guide

| Part Number | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [mA] | Input ⁽¹⁾ Current [mA] | Efficiency ⁽¹⁾ typ. [%] | Max. Capacitive Load ⁽²⁾ [μF] |
|-------------------------------|---------------------------|----------------------|---------------------|-----------------------------------|------------------------------------|--|
| RP30-243.3SF ^(4,5) | 9-36 | 3.3 | 7500 | 1199 | 86 | 20000 |
| RP30-2405SF ^(4,5) | 9-36 | 5 | 6000 | 1420 | 88 | 14400 |
| RP30-2412SF ^(4,5) | 9-36 | 12 | 2500 | 1404 | 89 | 3000 |
| RP30-2415SF ^(4,5) | 9-36 | 15 | 2000 | 1404 | 89 | 2000 |
| RP30-483.3SF ^(4,5) | 18-75 | 3.3 | 7500 | 600 | 86 | 20000 |
| RP30-4805SF ^(4,5) | 18-75 | 5 | 6000 | 710 | 88 | 14400 |
| RP30-4812SF ^(4,5) | 18-75 | 12 | 2500 | 694 | 90 | 3000 |
| RP30-4815SF ^(4,5) | 18-75 | 15 | 2000 | 687 | 91 | 2000 |
| RP30-2405DF ^(4,5) | 9-36 | ±5 | ±3000 | 1420 | 88 | ±3000 |
| RP30-2412DF ^(4,5) | 9-36 | ±12 | ±1250 | 1437 | 87 | ±2000 |
| RP30-2415DF ^(4,5) | 9-36 | ±15 | ±1000 | 1437 | 87 | ±1300 |
| RP30-4805DF ^(4,5) | 18-75 | ±5 | ±3000 | 710 | 88 | ±3000 |
| RP30-4812DF ^(4,5) | 18-75 | ±12 | ±1250 | 710 | 88 | ±2000 |
| RP30-4815DF ^(4,5) | 18-75 | ±15 | ±1000 | 710 | 88 | ±1300 |




Notes:

- Note1: Maximum value at nominal input voltage and full load.
 Note2: Test by minimum Vin and constant resistor load.



Model Numbering

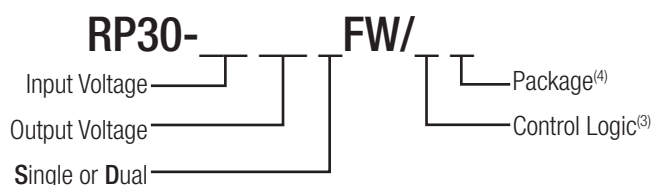

Ordering Examples

- RP30-2405SF^(4,5) = 24V Input, 5V Output, Positive Logic CTRL pin fitted
 RP30-4812DF^(4,5)/N-HC = 48V Input, ±12V Output, Negative Logic CTRL pin fitted, Heat-sink fitted

Notes:

- Note3: no suffix for CTRL function with Positive Logic (1=ON, 0=OFF)
 add "N" for CTRL function with Negative Logic (0=ON, 1=OFF)
 Note4: add suffix -HC for premounted Heat-sink and clips

UL60950-1 Certified

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

BASIC CHARACTERISTICS

| Parameter | Condition | Min. | Typ. | Max. |
|---|--|---------------|--|--|
| Input Voltage Range | nom. $V_{in} = 24\text{V}$ nom. $V_{in} = 48\text{V}$ | 9VDC 18VDC | 24VDC 48VDC | 36VDC 75VDC |
| Under Voltage Lockout (UVLO) | $V_{in} = 24\text{V}$ DC-DC ON DC-DC OFF | | 8VDC | 9VDC |
| | $V_{in} = 48\text{V}$ DC-DC ON DC-DC OFF | | 16VDC | 18VDC |
| Input Filter | | | | Pi-Type |
| Input Reflected Ripple Current ⁽⁵⁾ | nominal V_{in} and full load | | 20mA _{p-p} | |
| Input Surge Voltage | $V_{in} = 24\text{V}$, 100ms max. $V_{in} = 48\text{V}$, 100ms max. | | | 50VDC 100VDC |
| Start-up time | Power up Remote ON/OFF | | 30ms 30ms | |
| Operating Frequency Range | | 387kHz | 430kHz | 473kHz |
| Minimum Load | | 0% | | |
| Ripple and Noise | 20MHz bandwidth with a $1\mu\text{F}/50\text{V}$ MLCC 3.3V _{out} , 5V _{out} 12V _{out} , 15V _{out} | | 100mV _{p-p} 150mV _{p-p} | |
| Remote ON/OFF ⁽⁶⁾ | Positive Logic DC-DC ON DC-DC OFF | | | Open or $3.0\text{V} < V_r < 12\text{V}$ Short or $0\text{V} < V_r < 1.2\text{V}$ |
| | Negative Logic DC-DC ON DC-DC OFF | | | Short or $0\text{V} < V_r < 1.2\text{V}$ Open or $3.0\text{V} < V_r < 12\text{V}$ |
| Input current of Remote pin (CTRL) | DC-DC OFF | | 3mA | |
| | DC-DC ON | -0.5mA | | 0.5mA |


Notes:

Note5: Simulated source impedance of $12\mu\text{H}$. $12\mu\text{H}$ inductor in series with $+V_{in}$.


Note6: The ON/OFF control function can be positive or negative logic. The pin voltage is referenced $-V_{in}$ pin.

RP30-2405SFV

Efficiency vs. Output Current

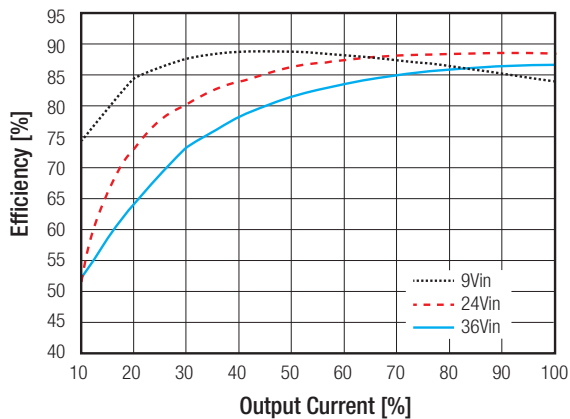

Efficiency vs. Input Voltage

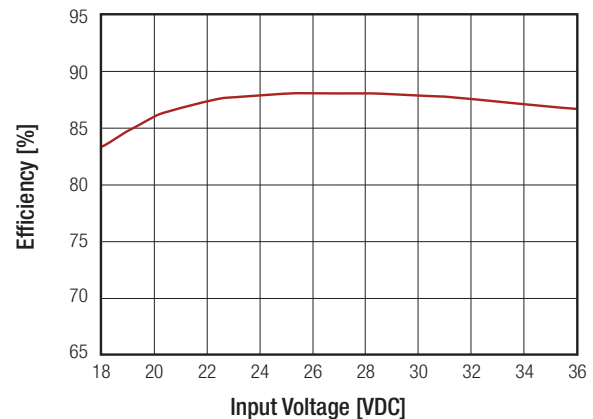


continued on next page


Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

RP30-4805SFW

Efficiency vs. Output Current

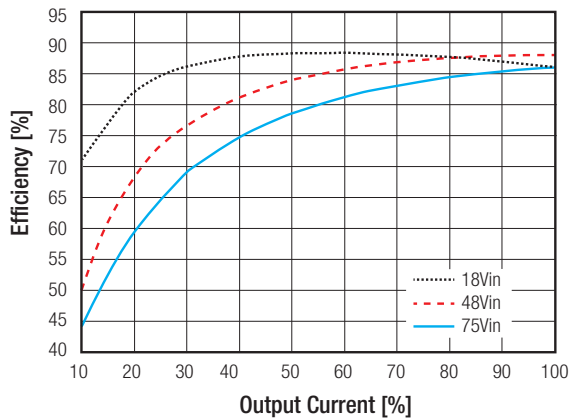

Efficiency vs. Input Voltage

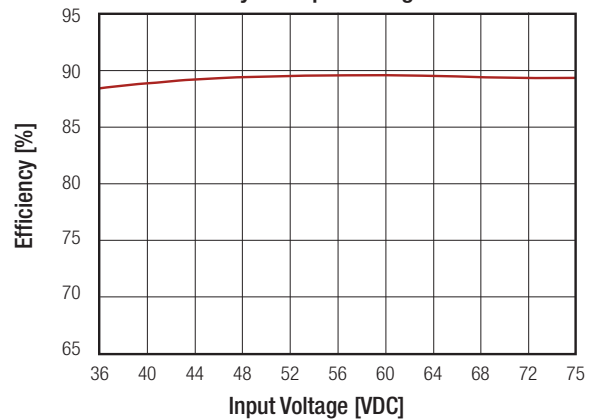


REGULATIONS

| Parameter | Condition | Value | |
|----------------------------------|------------------------------------|------------|-------|
| Output Voltage Accuracy | | ±1% max. | |
| Voltage Adjustability | Single | ±10% max. | |
| Line Voltage Regulation | low line to high line at full load | ±0.2% max. | |
| Load Voltage Regulation | no load to full load | Single | ±0.5% |
| | | Dual | ±1.0% |
| Cross Regulation | asymmetrical 25% <-> 100% load | ±5% | |
| Transient Response recovery time | 25% load step change | 250µs typ. | |

External Output Trimming

Output Voltage Trimming

Single output Powerline converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. No general equation can be given for calculating the trim resistors, but the following trimtables give typical values for choosing these trimming resistors. If voltages between the given trim points are required, extrapolate between the two nearest given values to work out the resistor required or use a variable resistor to set the output voltage. Output can be externally trimmed by using the method shown below.

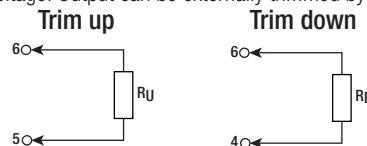

RP30-xx3.3SFW

| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|
| Vout = | 3.333 | 3.366 | 3.399 | 3.432 | 3.465 | 3.498 | 3.531 | 3.564 | 3.597 | 3.63 | Volts |
| R _u = | 57.93 | 26.16 | 15.58 | 10.28 | 7.11 | 4.99 | 3.48 | 2.34 | 1.46 | 0.75 | kOhms |
| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout = | 3.267 | 3.234 | 3.201 | 3.168 | 3.135 | 3.102 | 3.069 | 3.036 | 3.003 | 2.97 | Volts |
| R _d = | 69.47 | 31.23 | 18.49 | 12.12 | 8.29 | 5.74 | 3.92 | 2.56 | 1.50 | 0.65 | kOhms |

RP30-xx05SFW

| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|------------------|-------|-------|-------|------|------|------|------|------|------|------|-------|
| Vout = | 5.05 | 5.01 | 5.15 | 5.20 | 5.25 | 5.30 | 5.35 | 5.4 | 5.45 | 5.50 | Volts |
| R _u = | 36.57 | 16.58 | 9.92 | 6.58 | 4.59 | 3.25 | 2.30 | 1.59 | 1.03 | 0.59 | kOhms |
| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout = | 4.95 | 4.90 | 4.85 | 4.80 | 4.75 | 4.70 | 4.65 | 4.60 | 4.55 | 4.50 | Volts |
| R _d = | 45.53 | 20.61 | 12.31 | 8.15 | 5.66 | 4.00 | 2.81 | 1.92 | 1.23 | 0.68 | kOhms |

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

| RP30-xx12SFW | | | | | | | | | | | |
|------------------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout = | 12.12 | 12.24 | 12.36 | 12.48 | 12.60 | 12.72 | 12.84 | 12.96 | 13.08 | 13.20 | Volts |
| R_{L} = | 367.91 | 165.95 | 98.64 | 64.98 | 44.78 | 31.32 | 21.70 | 14.49 | 8.88 | 4.39 | kOhms |
| | | | | | | | | | | | |
| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout = | 11.88 | 11.76 | 11.64 | 11.52 | 11.40 | 11.28 | 11.16 | 11.04 | 10.92 | 10.8 | Volts |
| R_{D} = | 460.99 | 207.95 | 123.60 | 81.42 | 56.12 | 39.25 | 27.20 | 18.16 | 11.13 | 5.51 | kOhms |

| RP30-xx15SFW | | | | | | | | | | | |
|------------------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout = | 15.15 | 15.3 | 15.45 | 15.60 | 15.75 | 15.90 | 16.05 | 16.20 | 16.35 | 16.50 | Volts |
| R_{L} = | 404.18 | 180.59 | 106.06 | 68.80 | 46.44 | 31.53 | 20.88 | 12.90 | 6.69 | 1.72 | kOhms |
| | | | | | | | | | | | |
| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout = | 14.85 | 14.70 | 14.55 | 14.40 | 14.25 | 14.10 | 13.95 | 13.80 | 13.65 | 13.50 | Volts |
| R_{D} = | 499.82 | 223.41 | 131.27 | 85.20 | 57.56 | 39.14 | 25.97 | 16.10 | 8.42 | 2.282 | kOhms |



| PROTECTIONS | | | |
|--|-------------------|--------------------------------|--------|
| Parameter | Condition | Value | |
| Short Circuit Protection (SCP) | | continuous, automatic recovery | |
| Over Voltage Protection (OVP) | Zener Diode Clamp | 3.3Vout | 3.9VDC |
| | | 5Vout | 6.2VDC |
| | | 12Vout | 15VDC |
| | | 15Vout | 18VDC |
| Over Load Protection (OLP) | % of Iout rated | 150% typ. | |
| Over Temperature Protection (OTP) | | 115°C typ. | |
| Isolation Voltage | I/P to O/P | 1.6kVDC/ 1 minute | |
| | I/P (O/P) to case | 1.6kVDC/ 1 minute | |
| Isolation Resistance | 500VDC | 1GΩ min. | |
| Isolation Capacitance | | 1500pF max. | |
| Notes: Note7: This power module is not internally fused. An input line fuse must always be used. | | | |

| ENVIRONMENTAL | | |
|-----------------------------|--|------------------------------|
| Parameter | Condition | Value |
| Operating Temperature Range | without derating | -40°C to +62°C |
| | with derating | -40°C to +101°C |
| Maximum Case Temperature | | +105°C max. |
| Temperature Coefficient | | ±0.02%/°C max. |
| Thermal Impedance | natural convection (20LFM) without Heat-sink | 12°C/Watt |
| | natural convection (20LFM) with Heat-sink | 10°C/Watt |
| Operating Humidity | | 5% - 95% RH |
| Thermal Shock | | MIL-STD-810F |
| Vibration | | MIL-STD-810F |
| MTBF | MIL-HDBK-217F | 1288 x 10 ³ hours |
| | Bellcore TR-NWT-000332® | 3163 x 10 ³ hours |

continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

Derating Graph⁽⁹⁾

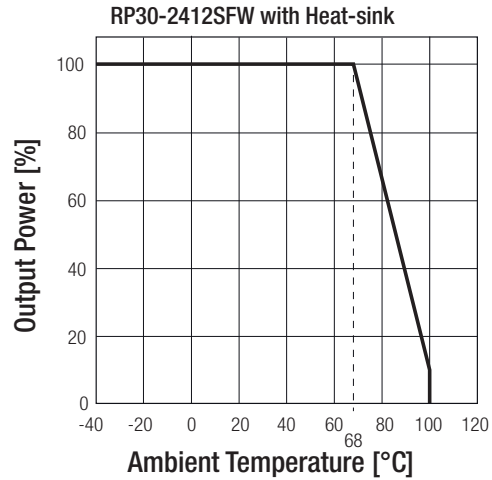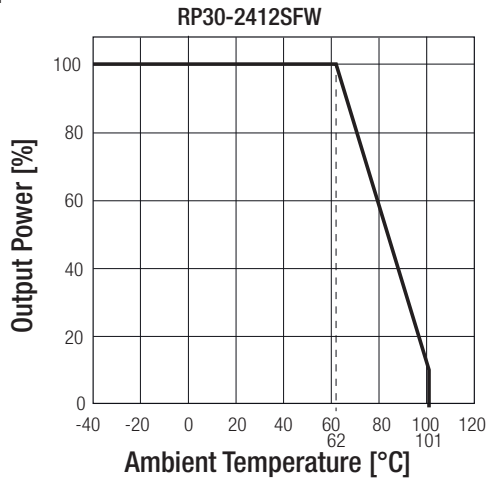

Notes:

Note8: BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment)
MIL-HDBK-217F Notice2 @ $T_A = 25^\circ\text{C}$, Full load (Ground, Benign, controlled environment)

Note9: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at techsupportAT@recom-power.com

SAFETY AND CERTIFICATIONS



| Certificate Type (Safety) | Report / File Number | Standard |
|--------------------------------|---|--|
| UL General Safety | E196683 | UL60950-1 1st. Ed.: 2003 C22.2 No. 60950 1st. Ed.: 2003 |
| EMC Compliance | Condition | Standard / Criterion |
| EMI Standard ⁽¹⁰⁾ | with external filter | EN55022, Class A or B |
| ESD | Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$ | EN61000-4-2, Criteria A |
| Radiated Immunity | 10 V/m | EN61000-4-3, Criteria A |
| Fast Transient ⁽¹¹⁾ | $\pm 2\text{kV}$ | EN61000-4-4, Criteria A |
| Surge ⁽¹¹⁾ | $\pm 1\text{kV}$ | EN61000-4-5, Criteria A |
| Conducted Immunity | 10 Vr.m.s | EN61000-4-6, Criteria A |

Notes:

Note10: The standard modules meet EMI Class A or Class B with external components, see filter suggestions below.

Note11: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Recom suggests: 12VDC & 24VDC input Nippon chemi-con KY series, 330 $\mu\text{F}/50\text{V}$
48VDC input Nippon chemi-con KY series, 220 $\mu\text{F}/100\text{V}$

EMI Filtering Class A

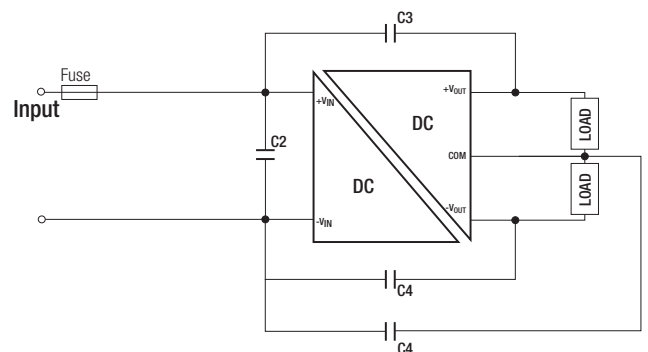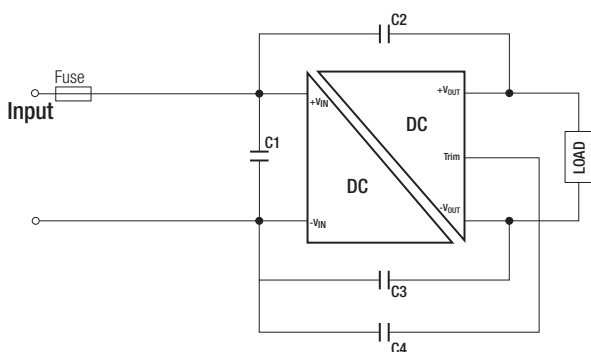


continued on next page

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

| MODEL | C1 | C2/C3/C4 |
|--------------|------------|------------|
| RP30-24xxSFW | 4.7µF/50V | 1000pF/2kV |
| RP30-24xxDFW | 1812 MLCC | 1808 MLCC |
| RP30-48xxSFW | 2.2µF/100V | 1000pF/2kV |
| RP30-48xxDFW | 1812 MLCC | 1808 MLCC |

EMI Filtering Class B



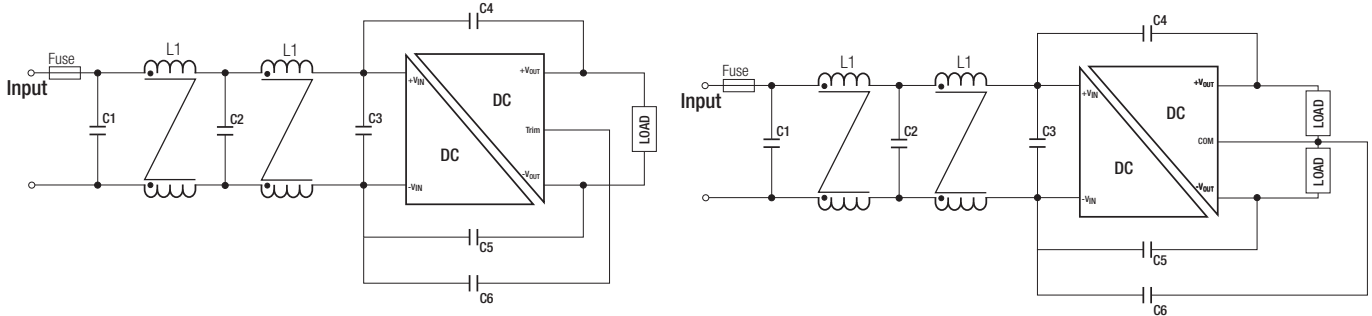


| MODEL | C1/C2/C3 | C4/C5/C6 | L1 | L2 |
|--------------|------------|------------|---|---|
| RP30-24xxSFW | 4.7µF/50V | 1000pF/2kV | CMC: 33.3µH ref.: WE 744842932 ref.: CMC-09 | CMC: 55µH ref.: WE 744290560 ref.: CMC-10 |
| RP30-24xxDFW | 1812 MLCC | 1808 MLCC | | |
| RP30-48xxSFW | 2.2µF/100V | 1000pF/2kV | CMC: 33.3µH ref.: WE 744842932 ref.: CMC-09 | CMC: 55µH ref.: WE 744290560 ref.: CMC-10 |
| RP30-48xxDFW | 1812 MLCC | 1808 MLCC | | |

DIMENSIONS and PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|----------------------------|-------------------|----------------------|
| Material | Case | Nickel coated copper |
| | Base | FR4 PCB |
| | Potting | Epoxy (UL94-V0) |
| Package Dimensions (LxWxH) | without Heat-sink | 50.8 x 25.4 x 10.2mm |
| | with Heat-sink | 56.8 x 25.4 x 16.8mm |
| Package Weight | without Heat-sink | 30.5g |
| | with Heat-sink | 41.39g |

Dimension Drawing (mm)


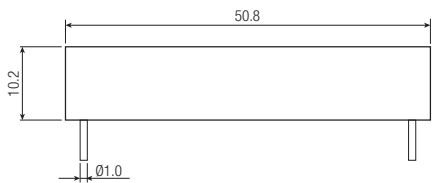


Pin Connections

| Pin # | Single | Dual |
|-------|--------|-------|
| 1 | +Vin | +Vin |
| 2 | -Vin | -Vin |
| 3 | CTRL | CTRL |
| 4 | +Vout | +Vout |
| 5 | -Vout | Com |
| 6 | Trim | -Vout |

Pin Pitch Tolerance ±0.25mm
 Pin dimension tolerance ±0.1mm
 Tolerance: X.X ±0.5mm
 X.XX ±0.25mm


Recommended Footprint Details

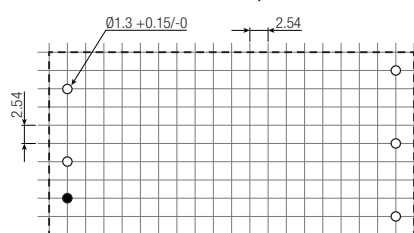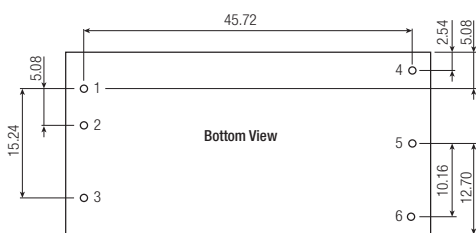

continued on next page

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

Dimension Drawing (mm) with Heat-sink

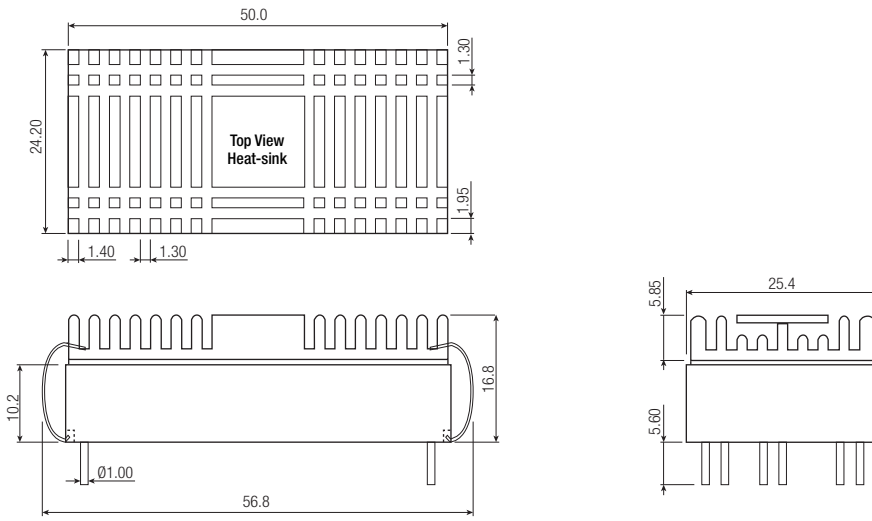

PACKAGING INFORMATION

| Parameter | Type | Value |
|---------------------------|-------------------|-----------------|
| Packaging Quantity | without Heat-sink | 9pcs. |
| | with Heat-sink | 20pcs. |
| Storage Temperature Range | | -55°C to +125°C |
| Storage Humidity | | 5% - 95% RH |

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[RP30-2405DFW](#) [RP30-2405DFW/N](#) [RP30-2405DFW/N-HC](#) [RP30-2405DFW-HC](#) [RP30-2405SFW](#) [RP30-2405SFW/N](#) [RP30-2405SFW/N-HC](#) [RP30-2405SFW-HC](#) [RP30-2412DFW](#) [RP30-2412DFW/N](#) [RP30-2412DFW/N-HC](#) [RP30-2412DFW-HC](#) [RP30-2412SFW](#) [RP30-2412SFW/N](#) [RP30-2412SFW/N-HC](#) [RP30-2412SFW-HC](#) [RP30-2415DFW](#) [RP30-2415DFW/N](#) [RP30-2415DFW/N-HC](#) [RP30-2415DFW-HC](#) [RP30-2415SFW](#) [RP30-2415SFW/N](#) [RP30-2415SFW/N-HC](#) [RP30-2415SFW-HC](#) [RP30-243.3SFW](#) [RP30-243.3SFW/N](#) [RP30-243.3SFW/N-HC](#) [RP30-243.3SFW-HC](#) [RP30-4805DFW](#) [RP30-4805DFW/N](#) [RP30-4805DFW/N-HC](#) [RP30-4805DFW-HC](#) [RP30-4805SFW](#) [RP30-4805SFW/N](#) [RP30-4805SFW/N-HC](#) [RP30-4805SFW-HC](#) [RP30-4812DFW](#) [RP30-4812DFW/N](#) [RP30-4812DFW/N-HC](#) [RP30-4812DFW-HC](#) [RP30-4812SFW](#) [RP30-4812SFW/N](#) [RP30-4812SFW/N-HC](#) [RP30-4812SFW-HC](#) [RP30-4815DFW](#) [RP30-4815DFW/N](#) [RP30-4815DFW/N-HC](#) [RP30-4815DFW-HC](#) [RP30-4815SFW](#) [RP30-4815SFW/N](#) [RP30-4815SFW/N-HC](#) [RP30-4815SFW-HC](#) [RP30-483.3SFW](#) [RP30-483.3SFW/N](#) [RP30-483.3SFW/N-HC](#) [RP30-483.3SFW-HC](#)