S-6 CANDELABRA SCREW BASE See lamp ratings on page K.

Recognized under the component program of Underwriters' Laboratories Inc. 75W., 125V.

Large Incandescent Indicators

FOR MOUNTING IN 1" CLEARANCE HOLE FOR 6 TO 250V OPERATION

These series indicator lights meet or exceed requirements of MIL-L-3661.

MATERIALS AND FINISHES


- Mounting Bushing: Standard—brass, white nickel finish. Optional—black nickel finish.
- Lens Holder and Knurled Flange Ring: Brass, polished chrome finish.
 Optional—black nickel or satin chrome finish.
- Mounting Nut: Brass, white nickel finish.
- Internal-tooth Lockwasher: Phosphor bronze, white nickel finish.
- Terminals: Solder brass, hot tinned. Screw-brass, white nickel finish. Quick Connect-brass, tinned. Mate with standard female receptacles.

These assemblies are shown with screw-on or friction-fit lens caps, Bayonet lock lens caps are also available. Information will be furnished upon request.



How to designate the three digit part number suffix (-XXX		
Finish	Resistor	Hardware
2 — black nickel 3 — polišhed chrome 4 — satin chrome	0 — none	1 — brass 3 — water-tight on the face of the panel. (screw-on caps only)

WITH SCREW-ON LENS CAPS

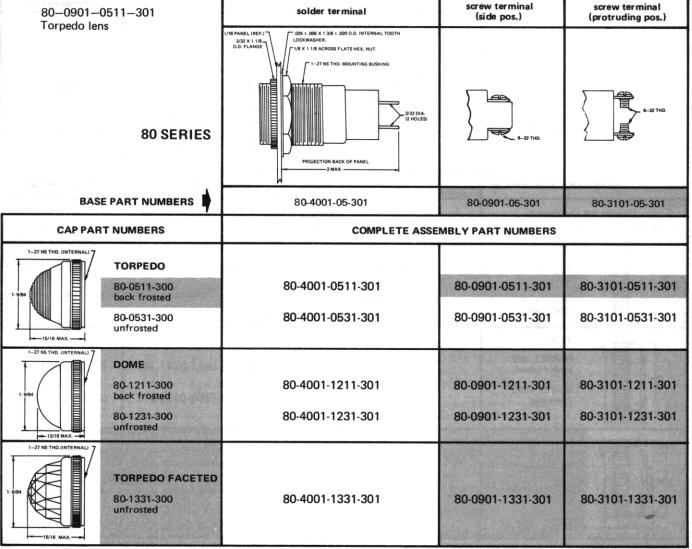

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

<u>080-0901-05-203</u> <u>080-0901-05-301</u> <u>080-4001-05-301</u> <u>080-4001-05-300</u> <u>080-0901-05-300</u> <u>080-4001-05-203</u> <u>080-3101-05-300</u> <u>080-3101-05-300</u> <u>080-0901-05-300</u> <u>080-0901-05-300</u> <u>080-0901-05-300</u> <u>080-4001-05-203</u> <u>080-0901-05-300</u> <u>080-4001-05-203</u> <u>080-0901-05-300</u> <u>080-4001-05-203</u> <u>080-0901-05-300</u> <u>080-4001-05-300</u> <u>080-4001-05</u>