
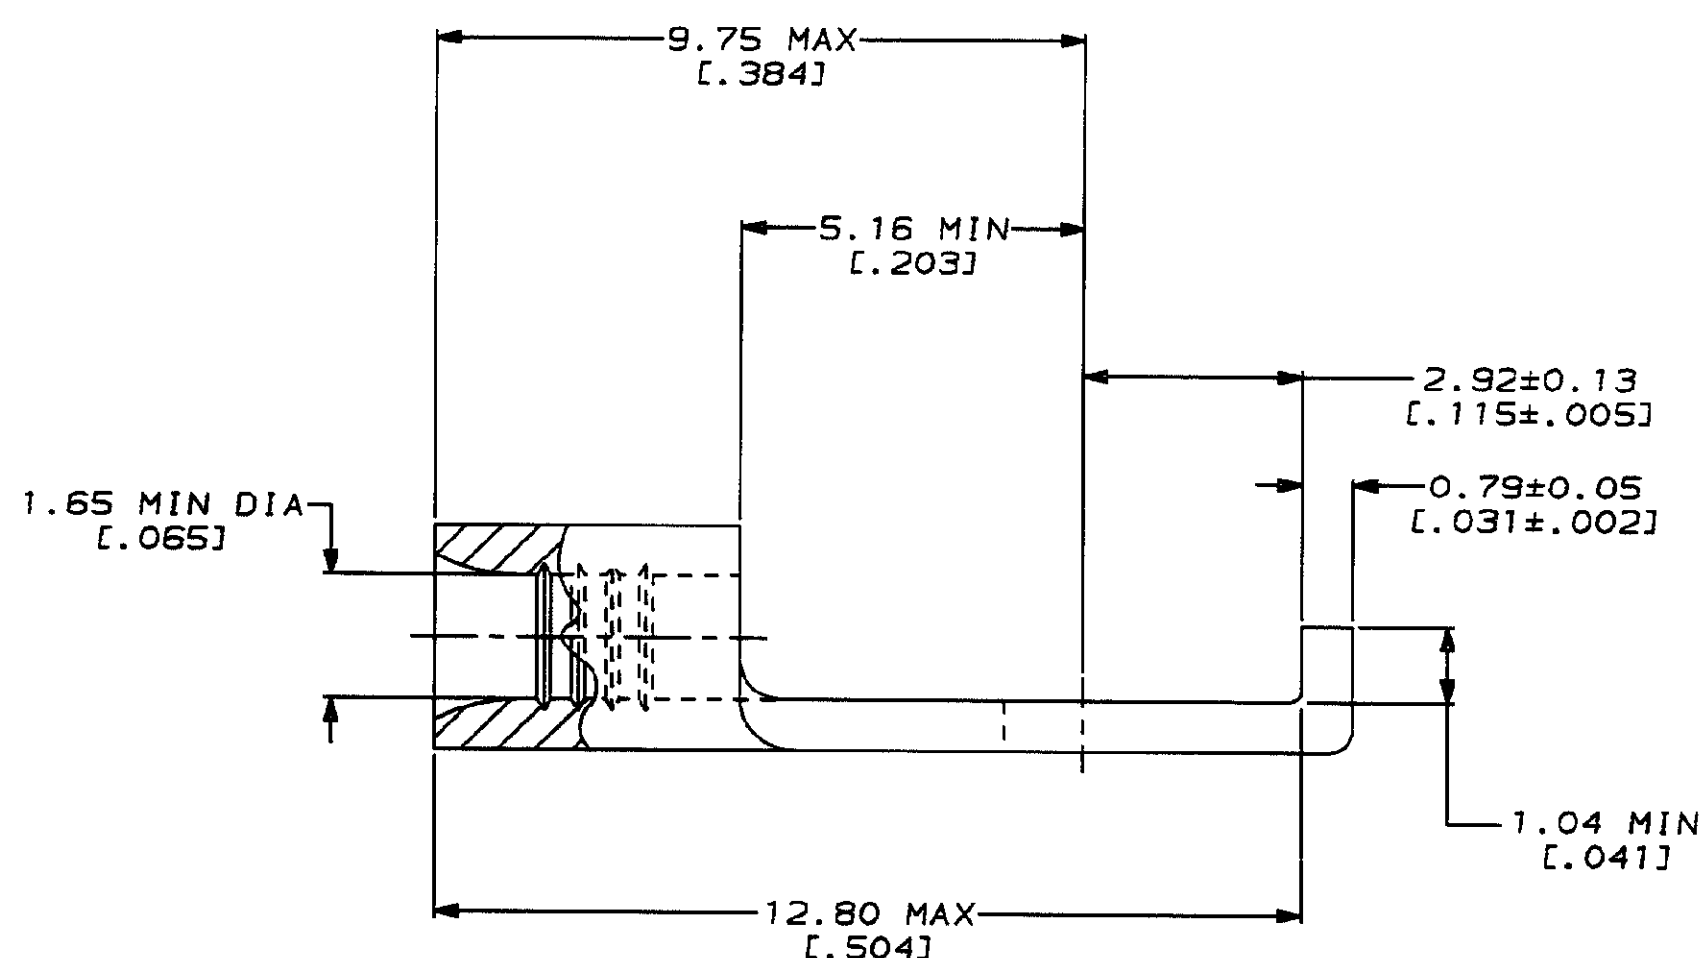


DRAWING MADE IN THIRD ANGLE PROJECTION
THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC		DIST		ZONE		LTR		REVISIONS		DATE	APPD
G	14	P	F			A		DESCRIPTION			
								REVISED PER 0720-0230-93		2/28/94	6 DAP

METRIC
DIMENSIONS LISTED IN mm [INCHES]

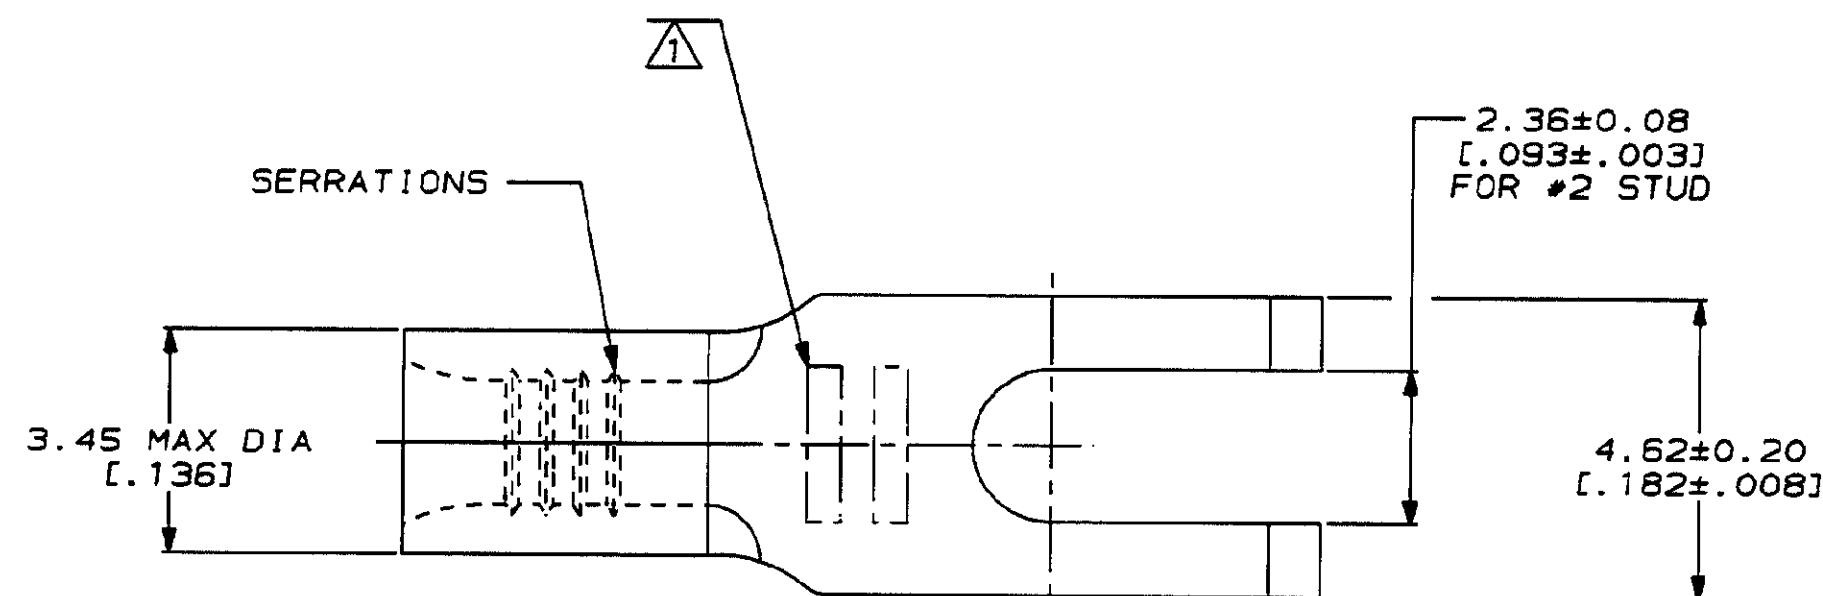

△ STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928; COMMERCIAL WIRE RANGE IS 22-16

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON:
2 PLC DEC ± -
3 PLC DEC ± -
ANGLES ± -

DR 3-2-93
TA BRINKMAN
CHK 3-2-93
DA PATTERSON

AMP AMP Incorporated
Harrisburg, PA 17105-3508

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

VOLTAGE RATING:
NOT APPLICABLE

MATERIAL
COPPER PER
ASTM B-152
ANNEALED

APPD 3-2-93
DE MILLER

NAME

TERMINAL, FLANGED
SPADE, BUDGET

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

WIRE CROSS SECTIONAL AREA RANGE:
0.26-1.65mm² [509-3,260] CIR MILS
STRANDED

FINISH
TIN PLATE
0.00254[.000100] MIN
THK PER MIL-T-10727

APPD 3-2-93
JL HECKLEY

PRODUCT SPEC

APPLICATION SPEC

SIZE
CAGE CODE
DRAWING NO
C 00779 C=324604

SCALE 10:1 SHEET 1 OF 1

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

WEIGHT

CUSTOMER DRAWING

AMP 1471-S REV 3-92

28-FEB-94 14:33:00 amp26463 /Files/dept1123/dwg1123/u.bodies/u.22-16

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[324604](#)