

**Not Recommended for New Designs**

## Low Jitter and Skew 10 to 140 MHz Zero Delay Buffer (ZDB)

| Key Features  | Description  |
|---|--|
| <ul style="list-style-type: none"> <li>10 to 140 MHz operating frequency range</li> <li>Low output clock jitter: <ul style="list-style-type: none"> <li>- 140 ps-max c-c-j at 66 MHz</li> </ul> </li> <li>Low output-to-output skew: 150 ps-max</li> <li>Low product-to-product skew: 400 ps-max</li> <li>3.3 V power supply range</li> <li>Low power dissipation: <ul style="list-style-type: none"> <li>- 14 mA-max at 66MHz</li> <li>- 26 mA-max at 133 MHz</li> </ul> </li> <li>One input drives 5 outputs organized as 4+1</li> <li>SpreadThru™ PLL that allows use of SSCG</li> <li>Standard and High-Drive options</li> <li>Available in 8-pin SOIC and TSSOP packages</li> <li>Available in Commercial and Industrial grades</li> </ul> | <p>The SL2305 is a low skew, low jitter and low power Zero Delay Buffer (ZDB) designed to produce up to five (5) clock outputs from one (1) reference input clock for high speed clock distribution applications. The product has an on-chip PLL which locks to the input clock at CLKIN and receives its feedback internally from the CLKOUT pin.</p>   |
|   | <p>The SL2305 is available with two (2) drive strength versions. The -1 is the standard-drive version and -1H is the high-drive version.</p> <p>The SL2305 high-drive version operates up to 140MHz and the standard drive version -1 operates up to 100.</p> <p>The SL2305 enters into Power-Down (PD) mode if the input at CLKIN is DC (0 to VDD). In this power-down state all five (5) outputs are tri-stated and the PLL is turned off leading to less than 12<math>\mu</math>A-max of power supply current draw.</p> |


### Applications

- Printers and MFPs
- Digital Copiers
- PCs and Work Stations
- DTV
- Routers, Switchers and Servers
- Digital Embedded Systems


### Benefits

- Up to five (5) distribution of input clock
- Standard and High-Drive levels to control impedance level, frequency range and EMI
- Low jitter and skew
- Low power dissipation
- Low cost

### Block Diagram

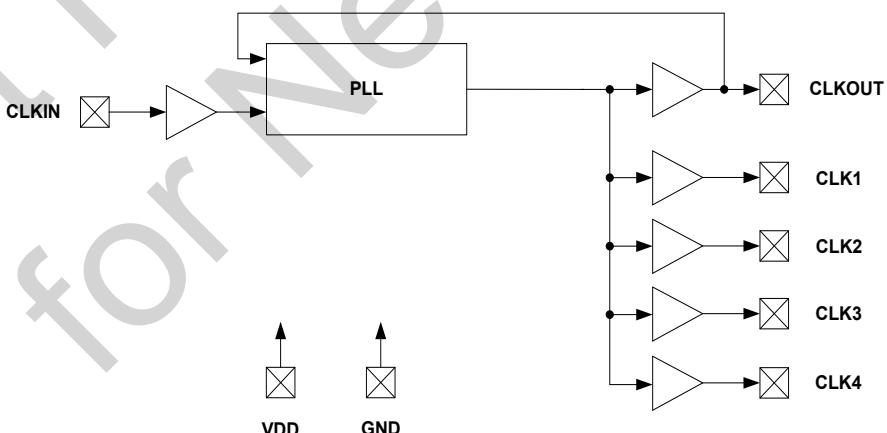

## Pin Configuration

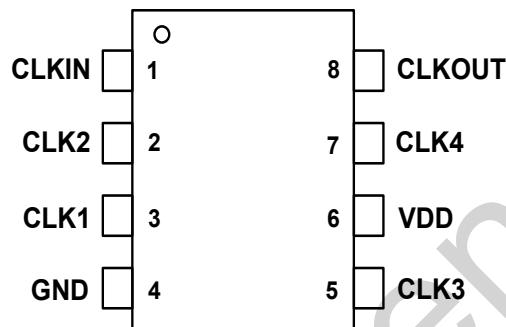

8-Pin SOIC or TSSOP

## Pin Description

| Pin Number | Pin Name | Pin Type | Pin Description   |
|------------|----------|----------|---|
| 1          | CLKIN    | Input    | Reference Frequency Clock Input. Weak pull-down (250kΩ).                                |
| 2          | CLK2     | Output   | Buffered Clock Output Weak pull-down (250kΩ).   |
| 3          | CLK1     | Output   | Buffered Clock Output. Weak pull-down (250kΩ).  |
| 4          | GND      | Power    | Power Ground.   |
| 5          | CLK3     | Output   | Buffered Clock Output. Weak pull-down (250kΩ).  |
| 6          | VDD      | Power    | 3.3V Power Supply.  |
| 7          | CLK4     | Output   | Buffered Clock Output. Weak pull-down (250kΩ).  |
| 8          | CLKOUT   | Output   | Buffered Clock Output, Used for Internal Feedback to PLL Input. Weak pull-down (250kΩ). |

### General Description

The SL2305 is a low skew, low jitter Zero Delay Buffer with very low operating power supply current (IDD).

The product includes an on-chip high performance PLL that locks into the input reference clock and produces five (5) output clock drivers tracking the input reference clock for systems requiring clock distribution.

In addition to CLKOUT that is used for internal PLL feedback, there is a single bank with four (4) outputs, bringing the number of total available output clocks to five (5).

### Input and output Frequency Range

The input and output frequency range is the same. But, the frequency range depends on the drive levels and load capacitance (CL) as given in the below Table 1.

| Drive      | CL(pF) | Min(MHz) | Max(MHz) |
|------------|--------|----------|----------|
| HIGH (-1H) | 15     | 10       | 140      |
| HIGH (-1H) | 30     | 10       | 100      |
| STD (-1)   | 15     | 10       | 100      |
| STD (-1)   | 30     | 10       | 66       |

**Table 1. Input/Output Frequency Range**

If the input clock frequency is DC (0 to VDD), this is detected by an input detection circuitry and all five (5) clock outputs are forced to Hi-Z. The PLL is shutdown to save power. In this shutdown state, the product draws less than 12 $\mu$ A-max supply current.

### SpreadThru™ Feature

If a Spread Spectrum Clock (SSC) were to be used as an input clock, the SL2305 is designed to pass the modulated Spread Spectrum Clock (SSC) signal from its CLKIN (reference) input to the output clocks. The same spread characteristics at the input are passed through the PLL and drivers without any degradation in spread percent (%), spread profile and modulation frequency.

### Absolute Maximum Ratings

| Description                   | Condition                      | Min   | Max     | Unit |
|-------------------------------|--------------------------------|-------|---------|------|
| Supply voltage, VDD           |                                | - 0.5 | 4.6     | V    |
| All Inputs and Outputs        |                                | - 0.5 | VDD+0.5 | V    |
| Ambient Operating Temperature | In operation, C-Grade          | 0     | 70      | °C   |
| Ambient Operating Temperature | In operation, I-Grade          | - 40  | 85      | °C   |
| Storage Temperature           | No power is applied            | - 65  | 150     | °C   |
| Junction Temperature          | In operation, power is applied | -     | 125     | °C   |

|                                  |               |        |       |    |
|----------------------------------|---------------|--------|-------|----|
| Soldering Temperature            |               | –      | 260   | °C |
| ESD Rating (Human Body Model)    | JEDEC22-A114D | -4,000 | 4,000 | V  |
| ESD Rating (Charge Device Model) | JEDEC22-C101C | -1,500 | 1,500 | V  |
| ESD Rating (Machine Model)       | JEDEC22-A115D | -250   | 250   | V  |
| Latch-up                         | 125°C         | -200   | 200   | mA |

**Operating Conditions:** Unless otherwise stated VDD=3.3V+/-10% and both C and I Grades

| Symbol | Description                    | Condition   | Min  | Max | Unit |
|--------|--------------------------------|---|------|-----|------|
| VDD    | 3.3V Supply Voltage            | 3.3V+/-10%  | 3.0  | 3.6 | V    |
| TA     | Operating Temperature(Ambient) | Commercial  | 0    | 70  | °C   |
|        |                                | Industrial  | -40  | 85  | °C   |
| CLOAD  | Load Capacitance               | 10 to 140 MHz, -1H high drive                                       | –    | 15  | pF   |
|        |                                | 10 to 100 MHz, -1H high drive                                       | –    | 30  | pF   |
|        |                                | 10 to 100MHz, -1 standard drive                                     | –    | 15  | pF   |
|        |                                | 10 to 66MHz, -1 standard drive                                      | –    | 30  | pF   |
| CIN    | Input Capacitance              | CLKIN pin   | –    | 7   | pF   |
| tpu    | Power-up Time                  | Power-up time for all VDDs to reach minimum VDD voltage (VDD=3.0V). | 0.05 | 100 | ms   |
| CLBW   | Closed-loop bandwidth          | 3.3V, (typical)   | 1.2  |     | MHz  |
| ZOUT   | Output Impedance               | 3.3V (typical), -1H high drive                                      | 22   |     | Ω    |
|        |                                | 3.3V (typical), -1 standard drive                                   | 32   |     | Ω    |

**DC Electrical Specifications:** Unless otherwise stated VDD=3.3V+/-10% and both C and I Grades

| Symbol | Description                                 | Condition  | Min | Max     | Unit |
|--------|---|--|-----|---------|------|
| VDD    | Supply Voltage                              |  | 3.0 | 3.6     | V    |
| VIL    | Input LOW Voltage                           | CLKIN (Pin-1)  | –   | 0.8     | V    |
| VIH    | Input HIGH Voltage                          | CLKIN (Pin-1)  | 2.0 | VDD+0.3 | V    |
| IIL    | Input LOW Current                           | CLKIN, 0 < VIN < 0.8V                                      | –   | 25      | µA   |
| IIH    | Input HIGH Current                          | CLKIN, VIN = VDD   | –   | 50      | µA   |
| VOL    | Output LOW Voltage<br>(All outputs)         | IOL = 8 mA (standard drive)                                | –   | 0.4     | V    |
|        |   | IOL = 12 mA (high drive)                                   | –   | 0.4     | V    |
| VOH    | Output HIGH Voltage<br>(All outputs)        | IOH = –8 mA (standard drive)                               | 2.4 | –       | V    |
|        |   | IOH = –12 mA (high drive)                                  | 2.4 | –       | V    |
| IDDPD  | Power Down Supply Current<br>CLKIN=0 to VDD | C-Grade, Power-down if CLKIN=0 to VDD or input is floating | –   | 12      | µA   |
|        |   | I-Grade, Power-down if CLKIN=0 to VDD or input is floating | –   | 25      | µA   |
| IDD1   | Power Supply Current                        | All Outputs CL=0, 33MHz CLKIN                              | –   | 8       | mA   |
| IDD2   | Power Supply Current                        | All Outputs CL=0, 66MHz CLKIN                              | –   | 14      | mA   |
| IDD3   | Power Supply Current                        | All Outputs CL=0, 100MHz CLKIN                             | –   | 20      | mA   |
| IDD4   | Power Supply Current                        | All Outputs CL=0, 133MHz CLKIN                             | –   | 26      | mA   |
| RPD    | Pull-down Resistors                         | Pins-1/2/3/5/7/8, 250kΩ-typ                                | 175 | 325     | kΩ   |

**Switching Specifications:** Unless otherwise stated VDD=3.3V+/-10% and both C and I Grades

| Symbol | Description  | Condition                                 | Min | Max | Unit |
|--------|--|---|-----|-----|------|
| FMAX1  | Maximum Frequency <sup>[1]</sup><br>(Input=Output)<br>All Active PLL Modes | High drive (-1H). All outputs CL=15pF     | 10  | 140 | MHz  |
|        |  | High drive (-1H), All outputs CL=30pF     | 10  | 100 | MHz  |
|        |  | Standard drive, (-1), All outputs CL=15pf | 10  | 100 | MHz  |
|        |  | Standard drive, (-1), All outputs CL=30pf | 10  | 66  | MHz  |
| INDC   | Input Duty Cycle   | Measured at 1.4V, Fout=66MHz,<br>CL=15pF  | 30  | 70  | %    |
| OUTDC1 | Output Duty Cycle <sup>[2]</sup>   | Measured at 1.4V, Fout≥50MHz,<br>CL=15pF  | 40  | 60  | %    |
| OUTDC2 | Output Duty Cycle <sup>[2]</sup>   | Measured at 1.4V, Fout≤50MHz,<br>CL=15pF  | 45  | 55  | %    |
| tr/f   | Rise, Fall Time (3.3V) <sup>[2]</sup><br>(Measured at: 0.8 to 2.0V)        | High drive (-1H), CL=10pF                 | –   | 1.5 | ns   |
|        |  | High drive (-1H), CL=30pF                 | –   | 1.8 | ns   |
|        |  | Standard drive (-1), CL=10pF              | –   | 2.2 | ns   |
|        |  | Standard drive (-1), CL=30pF              | –   | 2.5 | ns   |


|                   |  |   |      |     |    |
|-------------------|--|---|------|-----|----|
| t1                | Output-to-Output Skew <sup>[2]</sup><br>(Measured at VDD/2)        | All outputs CL=0 or equally loaded, -1 or -1H drives          | —    | 150 | ps |
| t2                | Product-to-Product Skew <sup>[2]</sup><br>(Measured at VDD/2)      | All outputs CL=0 or equally loaded, -1 or -1H drives          | —    | 400 | ps |
| t3                | Delay Time, CLKIN Rising Edge to CLKOUT Rising Edge <sup>[2]</sup> | Measured at VDD/2   | —220 | 220 | ps |
| t <sub>LOCK</sub> | PLL Lock Time <sup>[2]</sup>                                       | Time from 90% of VDD to valid clocks on all the output clocks | —    | 1.0 | ms |
| CCJ               | Cycle-to-cycle Jitter <sup>[2]</sup>                               | Fin=Fout=66 MHz, <CL=15pF, -1H drive                          | —    | 140 | ps |
|                   |  | Fin=Fout=66 MHz, <CL=15pF, -1 drive                           | —    | 150 | ps |
|                   |  | Fin=Fout=66 MHz, <CL=30pF, -1H drive                          | —    | 160 | ps |
|                   |  | Fin=Fout=66 MHz, <CL=30pF, -1 drive                           | —    | 170 | ps |

**Notes:**

1. For the given maximum loading conditions. See CL in Operating Conditions Table.
2. Parameter is guaranteed by design and characterization. Not 100% tested in production.

## External Components & Design Considerations

### Typical Application Schematic

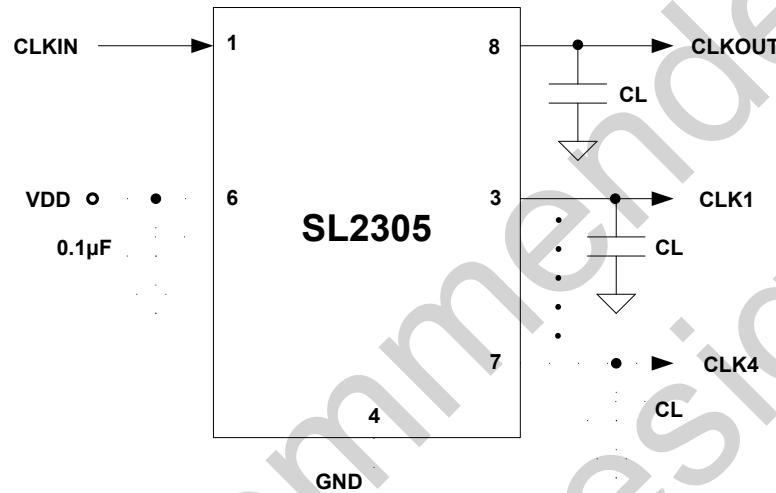

### Comments and Recommendations

**Decoupling Capacitor:** A decoupling capacitor of  $0.1\mu\text{F}$  must be used between VDD and VSS on the pins 6 and 4. Place the capacitor on the component side of the PCB as close to the VDD pin as possible. The PCB trace to the VDD pin and to the GND via should be kept as short as possible. Do not use vias between the decoupling capacitor and the VDD pin.

**Series Termination Resistor:** A series termination resistor is recommended if the distance between the outputs and the load is over  $1\frac{1}{2}$  inch. The nominal impedance of the Clock outputs are about  $30\ \Omega$ . Use  $20\ \Omega$  resistor in series with the output to terminate  $50\Omega$  trace impedance and place  $20\ \Omega$  resistor as close to the clock outputs as possible.

**Zero Delay and Skew Control:** All outputs and CLKIN pins should be loaded with the same load to achieve "Zero Delay" between the CLKIN and the outputs. The CLKOUT pin is connected to CLKIN internally on-chip for internal feedback to PLL, and sees an additional  $2\ \text{pF}$  load with respect to the clock pins. For applications requiring zero input/output delay, the load at the all output pins including the CLKOUT pin must be the same. If any delay adjustment is required, the capacitance at the CLKOUT pin could be increased or decreased to increase or decrease the delay between clocks and CLKIN.

For minimum pin-to-pin skew, the external load at the clock outputs must be the same.

## Switching Waveforms

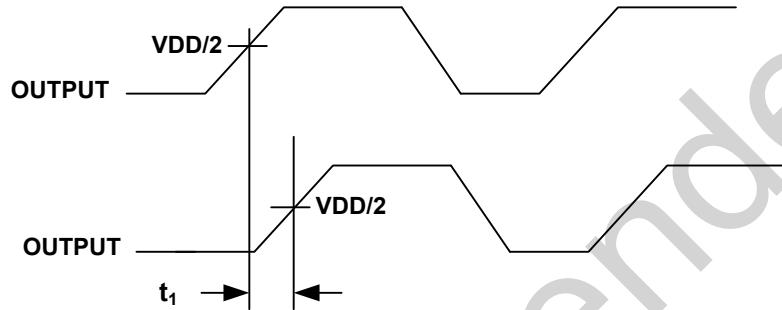


Figure 1. Output to Output Skew

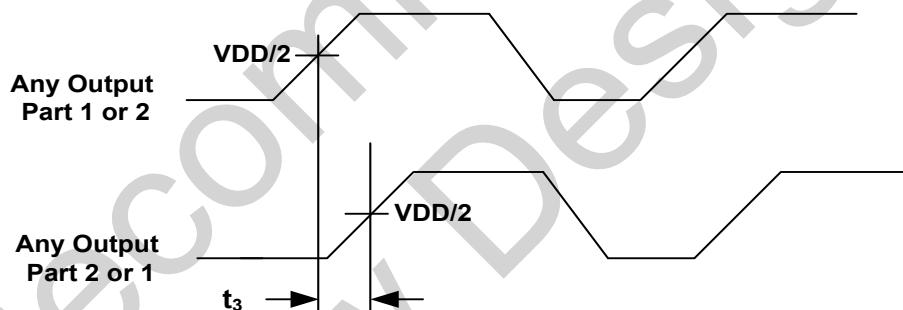


Figure 2. Input-to-Output Skew


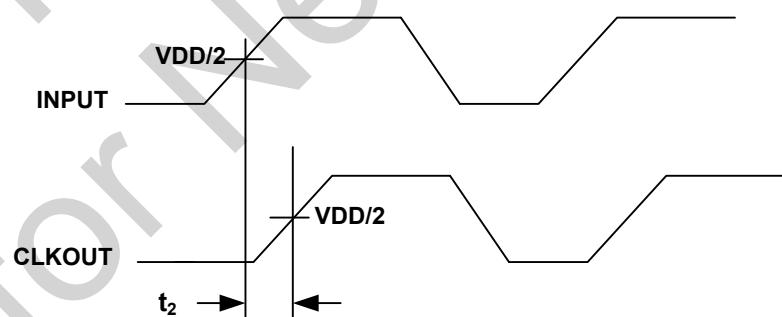


Figure 3. Part-to-Part Skew

## Package Outline and Package Dimensions

### 8-Pin SOIC Package (150-mil)

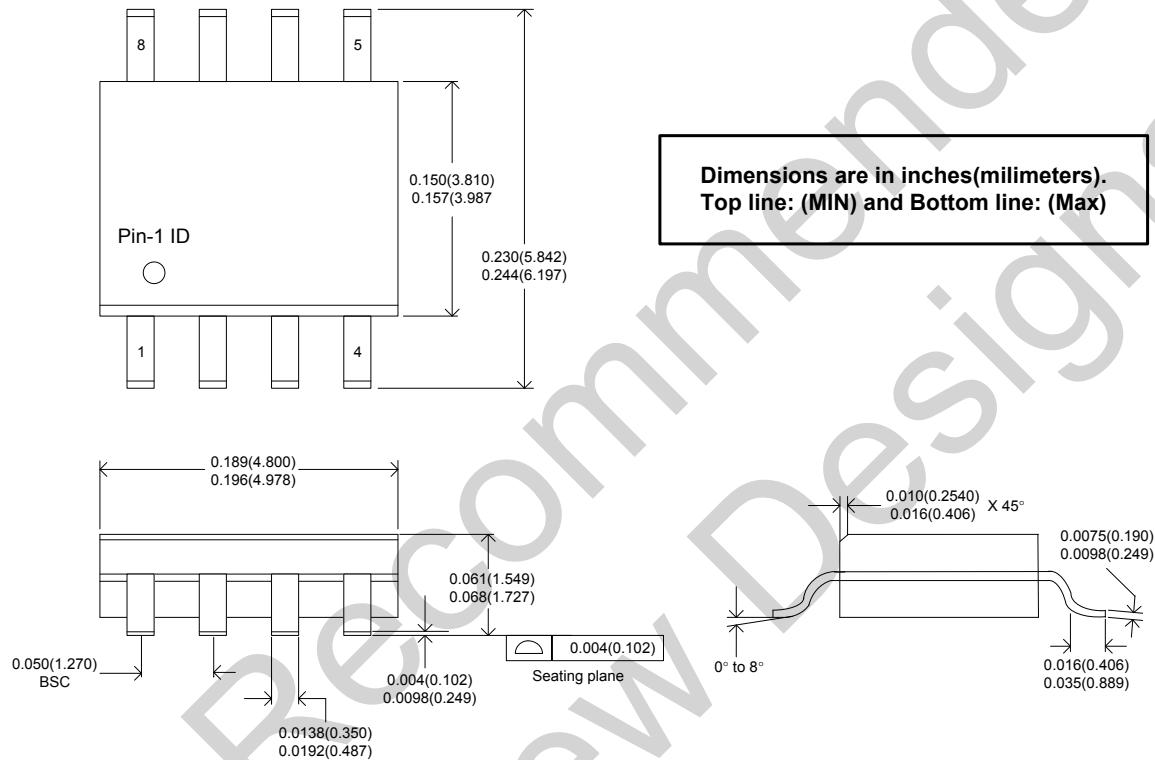


## Thermal Characteristics


| Parameter                                 | Symbol | Condition               | Min | Typ | Max | Unit |
|---|--------|-------------------------|-----|-----|-----|------|
| Thermal Resistance<br>Junction to Ambient | θ JA   | Still air               | -   | 150 | -   | °C/W |
|   | θ JA   | 1m/s air flow           | -   | 140 | -   | °C/W |
|   | θ JA   | 3m/s air flow           | -   | 120 | -   | °C/W |
| Thermal Resistance<br>Junction to Case    | θ JC   | Independent of air flow | -   | 40  | -   | °C/W |

## Package Outline and Package Dimensions

### 8-Pin TSSOP Package (4.4-mm)

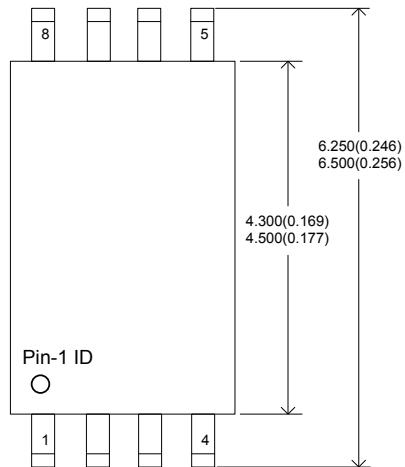

Dimensions are in millimeters (inches)  
 Top line: (MIN) and Bottom line: (Max)

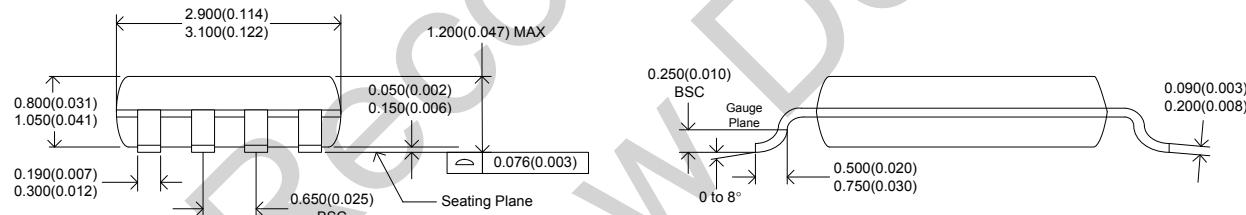

## Thermal Characteristics

| Parameter                                 | Symbol | Condition               | Min | Typ | Max | Unit |
|---|--------|-------------------------|-----|-----|-----|------|
| Thermal Resistance<br>Junction to Ambient |        | Still air               | -   | 110 | -   | °C/W |
|   |        | 1m/s air flow           | -   | 100 | -   | °C/W |
|   |        | 3m/s air flow           | -   | 80  | -   | °C/W |
| Thermal Resistance<br>Junction to Case    |        | Independent of air flow | -   | 35  | -   | °C/W |

**Ordering Information \***

| Ordering Number | Marking     | Shipping Package | Package     | Temperature |
|-----------------|-------------|------------------|-------------|-------------|
| SL2305SC-1      | SL2305SC-1  | Tube             | 8-pin SOIC  | 0 to 70°C   |
| SL2305SC-1T     | SL2305SC-1  | Tape and Reel    | 8-pin SOIC  | 0 to 70°C   |
| SL2305SI-1      | SL2305SI-1  | Tube             | 8-pin SOIC  | -40 to 85°C |
| SL2305SI-1T     | SL2305SI-1  | Tape and Reel    | 8-pin SOIC  | -40 to 85°C |
| SL2305SC-1H     | SL2305SC-1H | Tube             | 8-pin SOIC  | 0 to 70°C   |
| SL2305SC-1HT    | SL2305SC-1H | Tape and Reel    | 8-pin SOIC  | 0 to 70°C   |
| SL2305SI-1H     | SL2305SI-1H | Tube             | 8-pin SOIC  | -40 to 85°C |
| SL2305SI-1HT    | SL2305SI-1H | Tape and Reel    | 8-pin SOIC  | -40 to 85°C |
| SL2305ZC-1      | SL2305ZC-1  | Tube             | 8-pin TSSOP | 0 to 70°C   |
| SL2305ZC-1T     | SL2305ZC-1  | Tape and Reel    | 8-pin TSSOP | 0 to 70°C   |
| SL2305ZI-1      | SL2305ZI-1  | Tube             | 8-pin TSSOP | -40 to 85°C |
| SL2305ZI-1T     | SL2305ZI-1  | Tape and Reel    | 8-pin TSSOP | -40 to 85°C |
| SL2305ZC-1H     | SL2305ZC-1H | Tube             | 8-pin TSSOP | 0 to 70°C   |
| SL2305ZC-1HT    | SL2305ZC-1H | Tape and Reel    | 8-pin TSSOP | 0 to 70°C   |
| SL2305ZI-1H     | SL2305ZI-1H | Tube             | 8-pin TSSOP | -40 to 85°C |
| SL2305ZI-1HT    | SL2305ZI-1H | Tape and Reel    | 8-pin TSSOP | -40 to 85°C |

\*Note: The SL2305 products are RoHS compliant.

**ClockBuilder Pro**

One-click access to Timing tools, documentation, software, source code libraries & more. Available for Windows and iOS (CBGo only).

[www.silabs.com/CBPro](http://www.silabs.com/CBPro)

**Timing Portfolio**  
[www.silabs.com/timing](http://www.silabs.com/timing)

**SW/HW**  
[www.silabs.com/CBPro](http://www.silabs.com/CBPro)

**Quality**  
[www.silabs.com/quality](http://www.silabs.com/quality)

**Support and Community**  
[community.silabs.com](http://community.silabs.com)

#### Disclaimer

Silicon Laboratories intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Laboratories products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Laboratories reserves the right to make changes without further notice and limitation to product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Silicon Laboratories shall have no liability for the consequences of use of the information supplied herein. This document does not imply or express copyright licenses granted hereunder to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any Life Support System without the specific written consent of Silicon Laboratories. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Laboratories products are not designed or authorized for military applications. Silicon Laboratories products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons.

#### Trademark Information

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, Clockbuilder®, CMEMS®, DSPLL®, EFM®, EFM32®, EFR, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, ISOModem®, Precision32®, ProSLIC®, Simplicity Studio®, SiPHY®, Telegesis, the Telegesis Logo®, USBXpress® and others are trademarks or registered trademarks of Silicon Laboratories Inc. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. All other products or brand names mentioned herein are trademarks of their respective holders.



Silicon Laboratories Inc.  
400 West Cesar Chavez  
Austin, TX 78701  
USA

<http://www.silabs.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Silicon Laboratories:

[SL2305SC-1](#) [SL2305SC-1H](#) [SL2305SC-1HT](#) [SL2305SC-1T](#) [SL2305SI-1](#) [SL2305SI-1H](#) [SL2305SI-1HT](#) [SL2305SI-1T](#) [SL2305ZC-1](#) [SL2305ZC-1H](#) [SL2305ZC-1HT](#) [SL2305ZC-1T](#) [SL2305ZI-1](#) [SL2305ZI-1H](#) [SL2305ZI-1HT](#) [SL2305ZI-1T](#)