


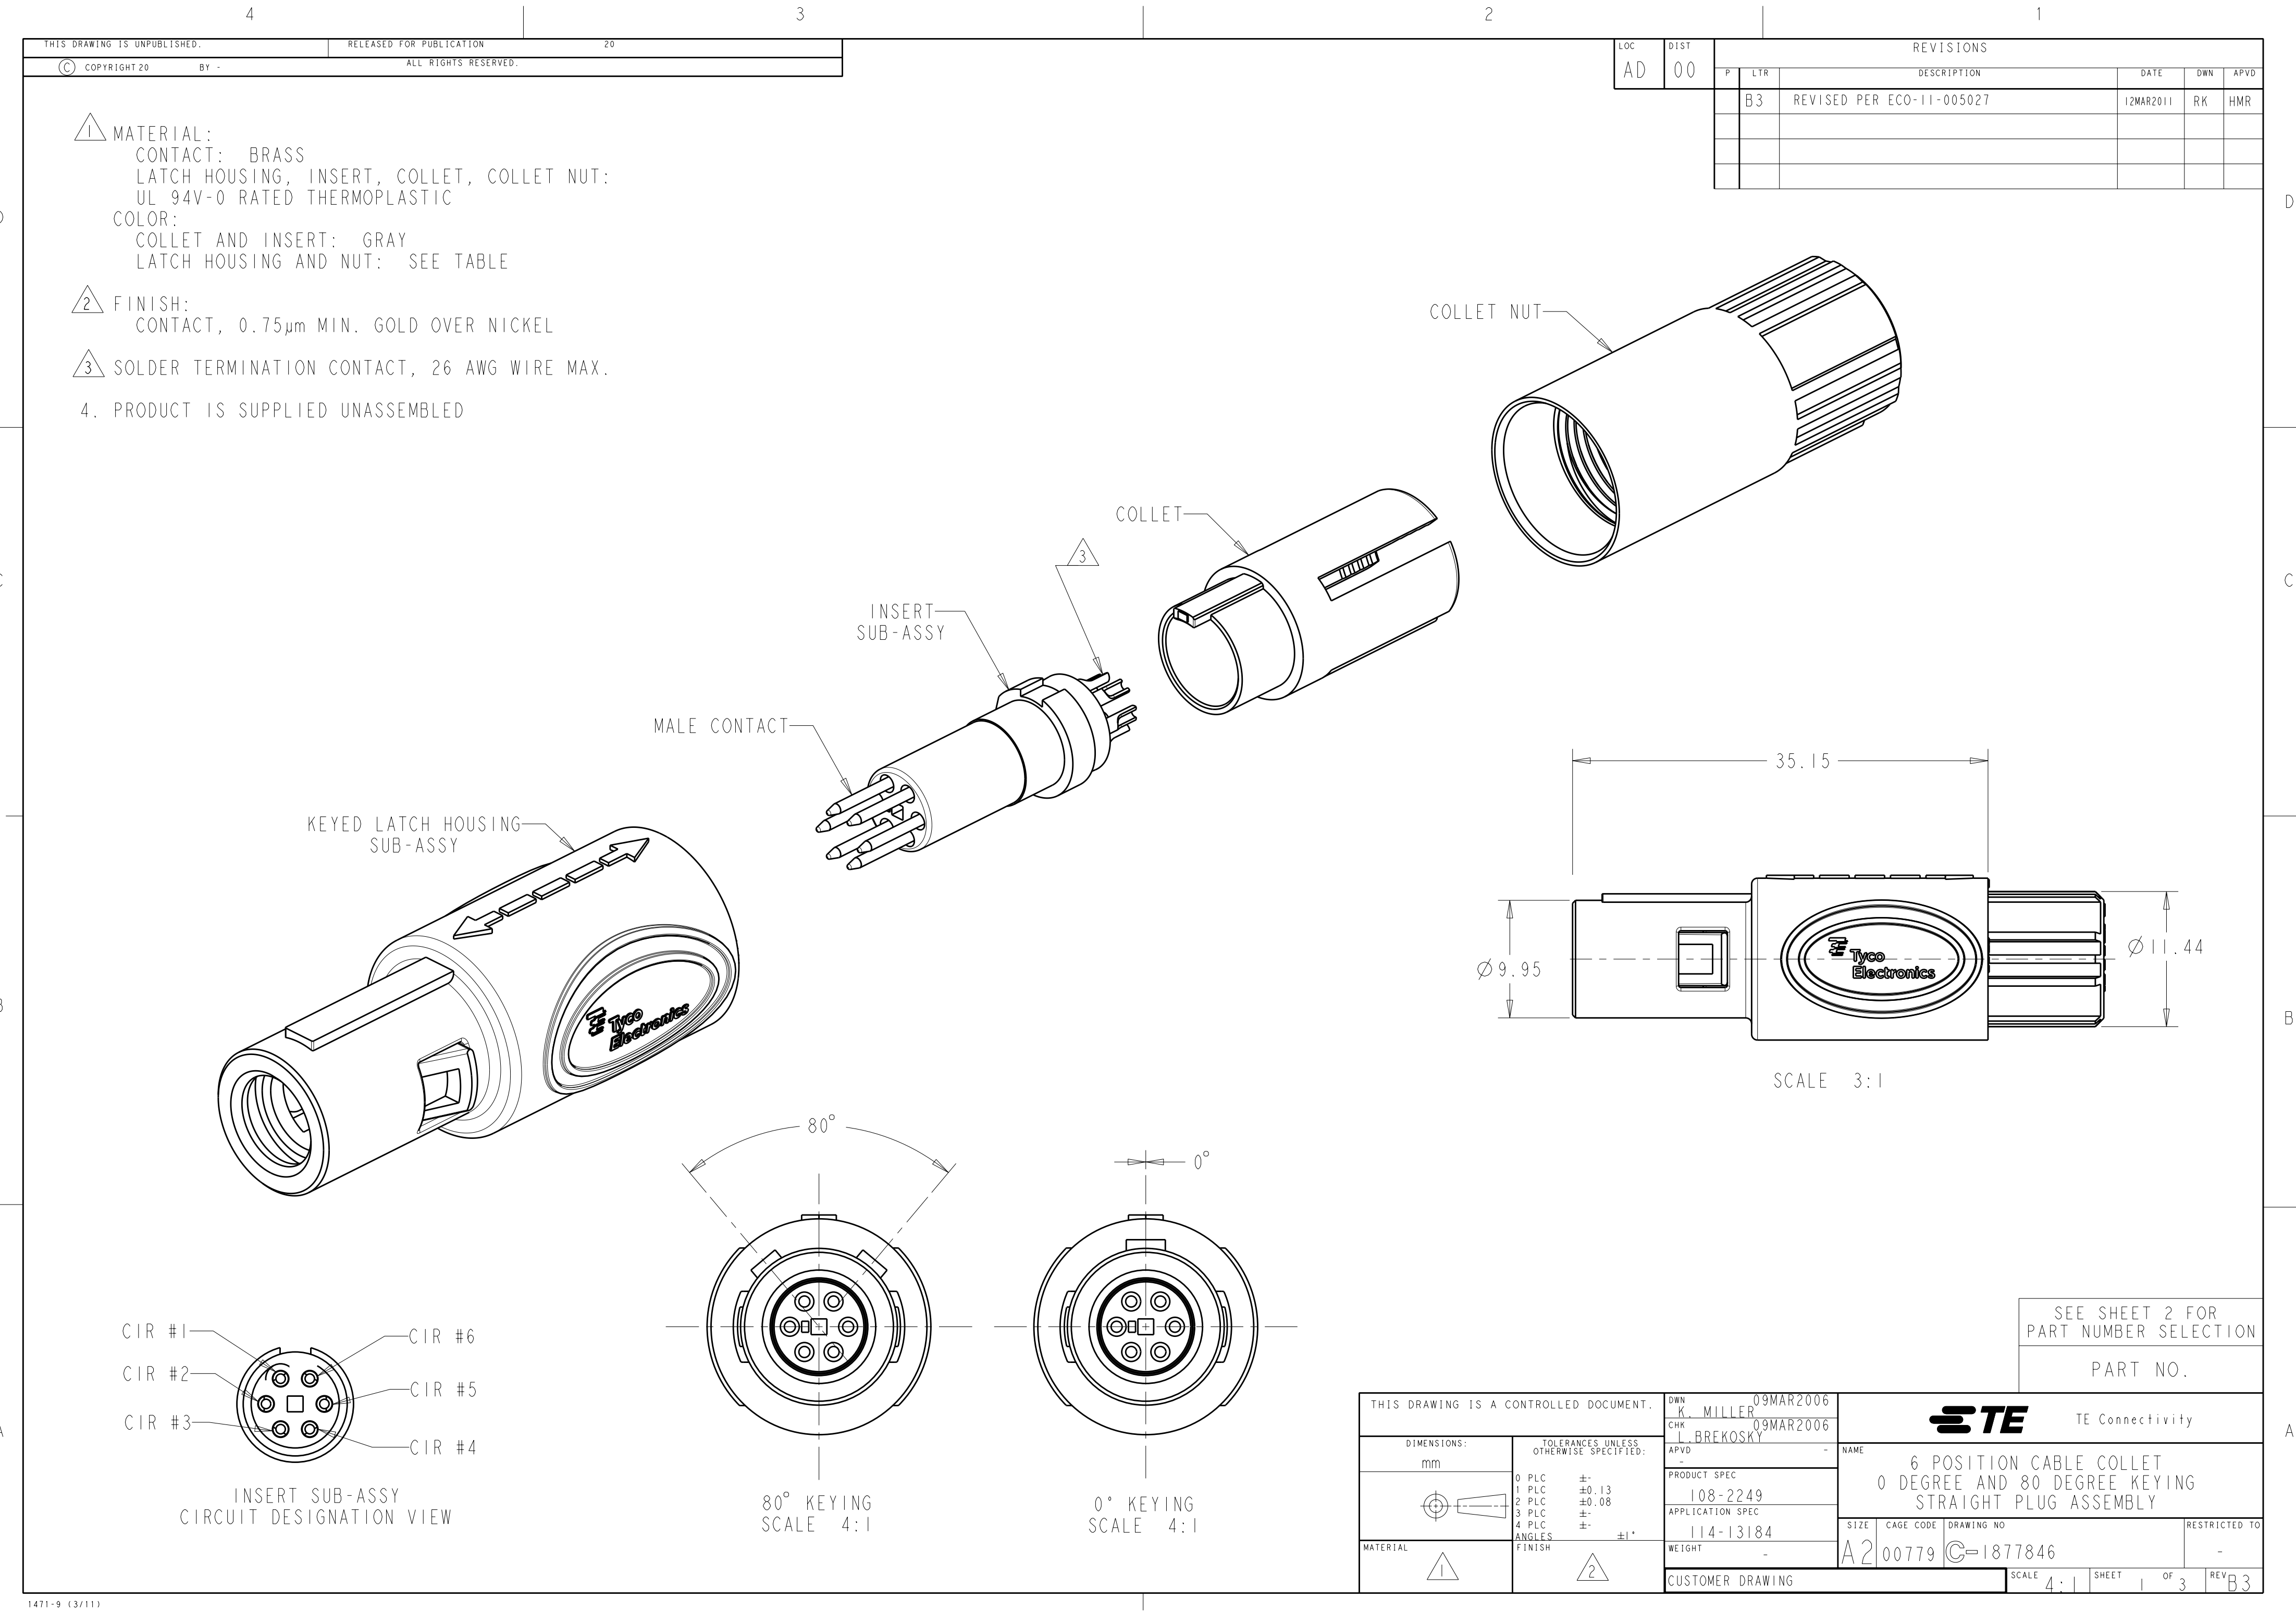



1 MATERIAL:
CONTACT: BRASS
LATCH HOUSING, INSERT, COLLET, COLLET NUT:
UL 94V-0 RATED THERMOPLASTIC
COLOR:
COLLET AND INSERT: GRAY
LATCH HOUSING AND NUT: SEE TABLE

2 FINISH:
CONTACT, 0.75µm MIN. GOLD OVER NICKEL

3 SOLDER TERMINATION CONTACT, 26 AWG WIRE MAX.

4. PRODUCT IS SUPPLIED UNASSEMBLED

LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B3			REVISED PER ECO-11-005027	12MAR2011	RK	HMR

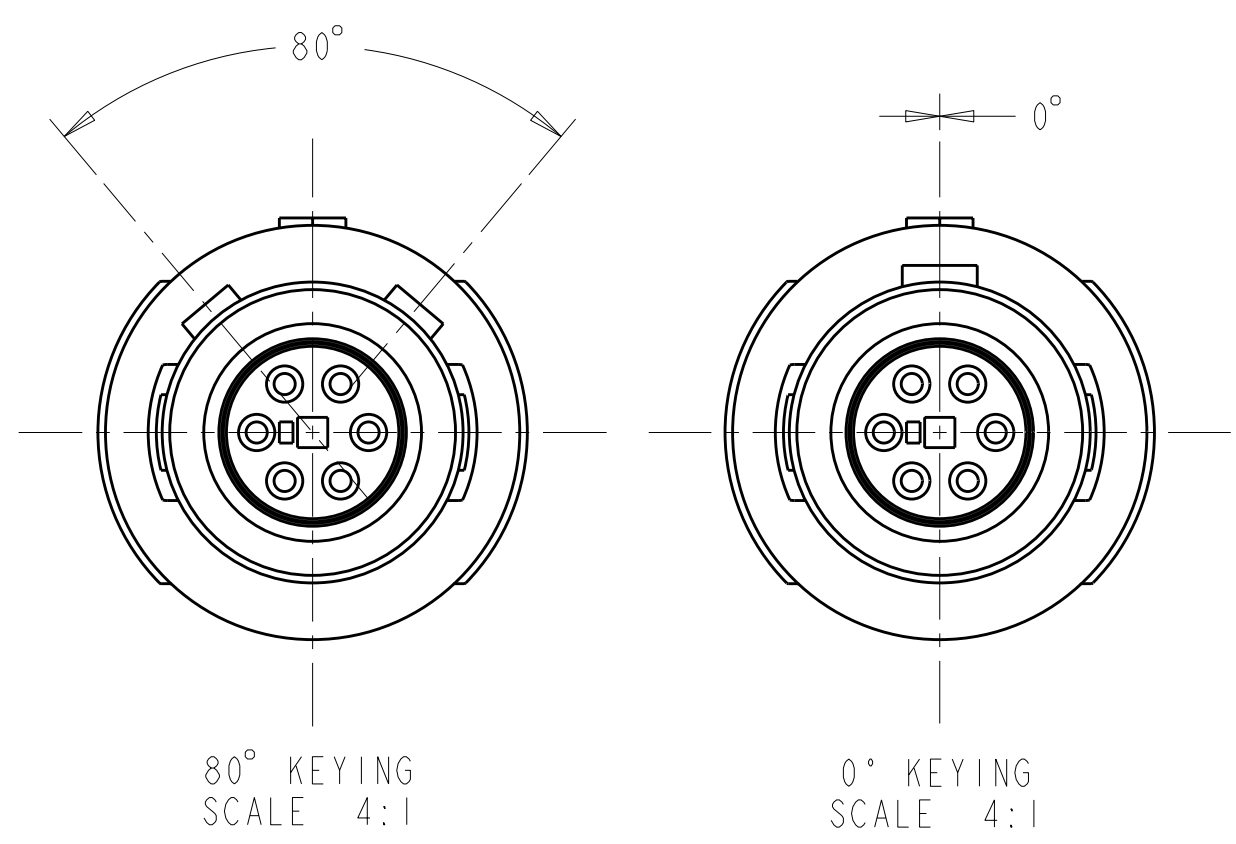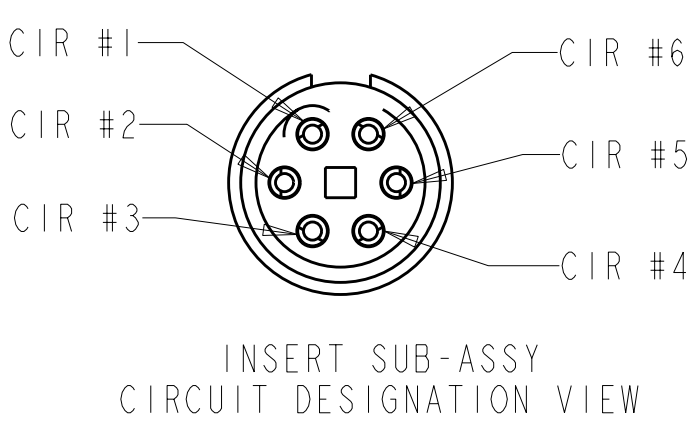

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. MILLER 09MAR2006	TE Connectivity			
		CHK L. BREKOSKY 09MAR2006				
DIMENSIONS: mm		APVD -	NAME 6 POSITION CABLE COLLET 0 DEGREE AND 80 DEGREE KEYING STRAIGHT PLUG ASSEMBLY			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-2249				
0 PLC ± 1 PLC ±0.13 2 PLC ±0.08 3 PLC ± 4 PLC ± ANGLES ±1° FINISH		APPLICATION SPEC 114-13184				
MATERIAL		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-1877846	RESTRICTED TO -
1		2	CUSTOMER DRAWING			
			SCALE 4:1	SHEET 1	OF 3	REV B3

SEE SHEET 2 FOR
PART NUMBER SELECTION

PART NO.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09MAR2006 K. MILLER CHR 09MAR2006 L. BREKOSKY		TE TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 6 POSITION CABLE COLLET 0 DEGREE AND 80 DEGREE KEYING STRAIGHT PLUG ASSEMBLY	
		0 PLC ±. 1 PLC ±0.13 2 PLC ±0.08 3 PLC ±. 4 PLC ±. ANGLES ±1°		APVD - PRODUCT SPEC 108-2249 APPLICATION SPEC 114-13184	
MATERIAL		FINISH		SIZE A2	CAGE CODE 00779
-		-		DRAWING NO C-1877846	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 4:1	SHEET 3 of 3
				REV B3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1877846-3](#)