

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0533093070

Status:


Active

Overview:

SlimStack Board-to-Board Connectors

Description:

SlimStack Board-to-Board Connector, 0.80mm Pitch, Floating Series, Plug, 5.65 or 6.65mm Mated Height, 30 Circuits, Right-Angle, without Boss

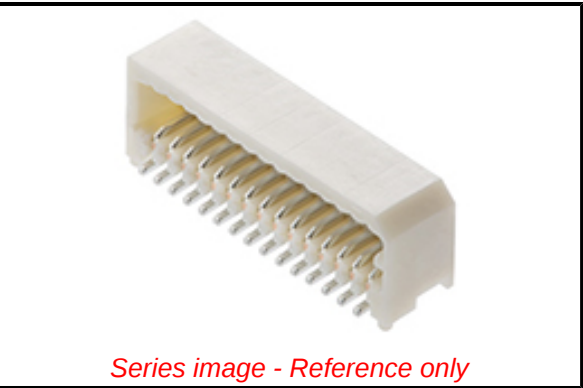

Series image - Reference only

Documents:

- 3D Model

Drawing (PDF)

Product Specification PS-52465-014-001 (PDF)

Product Specification PS-52588-031-001 (PDF)

Product Specification PS-52588-032-001 (PDF)
- Packaging Specification SPK-53309-001-001 (PDF)

RoHS Certificate of Compliance (PDF)

Product Literature (PDF)

Product Literature (PDF)

General

Product Family	PCB Headers
Series	53309
3D Viewer	Yes
Application	Board-to-Board, Signal
CURRENT-MAX-NUMERIC	0.5
Datasheet Order No	987651-8814, 987651-8815_ZH, 987651-8817_DE, 987651-8818_JA, 987651-8819_KO, 987651-8820_ES
Overview	SlimStack Board-to-Board Connectors
PITCH-MATING-NUMERIC	0.80
Product Guide Order No	987651-8281
Product Literature Order No	987652-0196, Reference Guide#
Product Name	SlimStack
Series Name	0.80 Floating
UPC	822348124329

Physical

Breakaway	No
Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Mated Height	5.65mm, 6.65mm
Mated Width	4.70mm, 7.20mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	574.055/mg
Number of Rows	2
Orientation	Right Angle
PC Tail Length	0.40mm, 0.50mm
PCB Locator	No
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	0.80mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Polarized to PCB	No

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China RoHS

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

53309 Series

Mates With

52465 , 52588 Board-to-Board Receptacle

Shrouded
Temperature Range - Operating
Termination Interface: Style

Fully
-40° to +105°C
Surface Mount

Electrical

Current - Maximum per Contact
Voltage - Maximum

0.5A
50V

Material Info

Reference - Drawing Numbers

Packaging Specification
Product Specification

SPK-53309-001-001
PS-52465-014-001, PS-52588-031-001,
PS-52588-032-001

This document was generated on 09/24/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[53309-3070](#)