
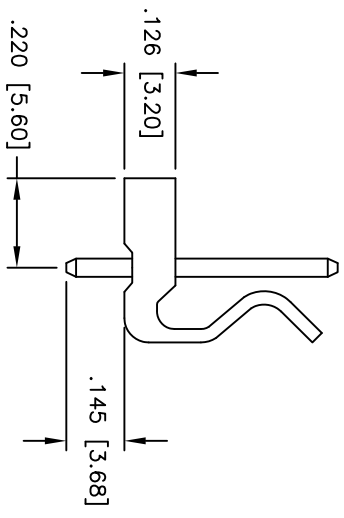
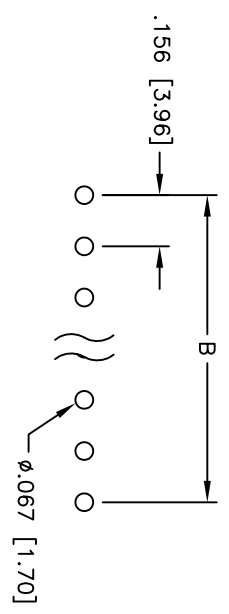
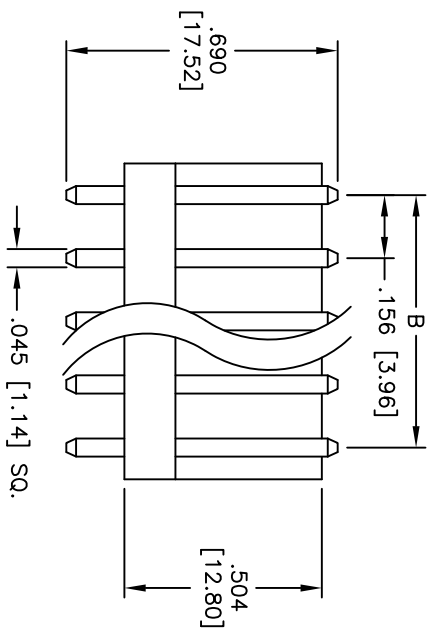


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 4/12/05 | |

APPROVED: _____
 DATE: _____ TITLE: _____

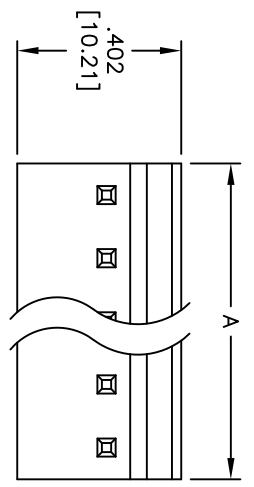

SPECIFICATIONS:
 Material: Insulator: Nylon 66, rated UL 94V-2
 Insulator color: White
 Contacts: Brass
 Plating: Tin over Copper underplate overall

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Contact resistance: 10 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant



Positions: 2 thru 20
 A = .156 [3.96] x No. of Positions + .012 [0.30]
 B = .156 [3.96] x No. of Spaces

| | |
|---|--------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] | |
| TOLERANCES: EXCEPT AS NOTED | |
| INCHES | HOLES |
| .X ± .10 | ØXX ± .10 |
| .XX ± .020 | ØXXX ± .015 |
| .XXX ± .015 | ØXXXX ± .010 |
| APPROVALS | DATE |
| DRAWN | SS |
| CHECKED | |
| APPROVED | |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER
 STRAIGHT, WITH LOCK POLARIZER

| | | |
|------|------------|--------------|
| SIZE | PART NO. | REV. |
| X | LHB-XX-SA1 | - |
| REF: | SCALE: NTS | SHEET 1 OF 1 |

