

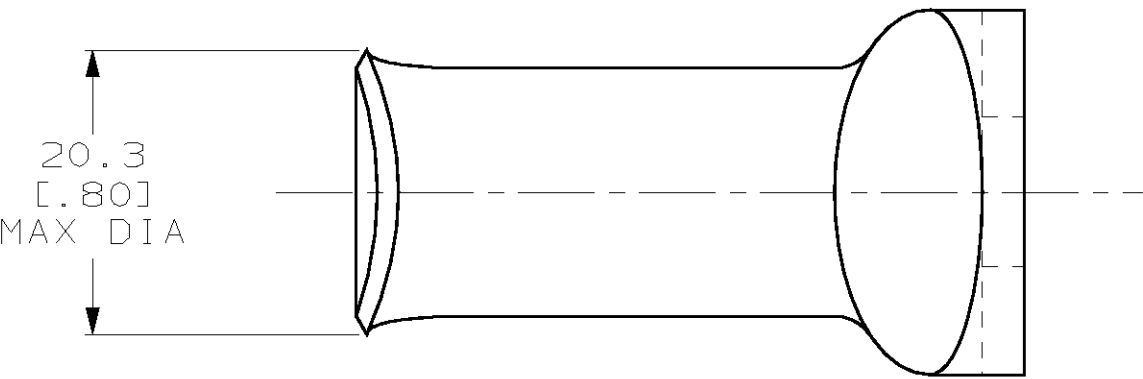


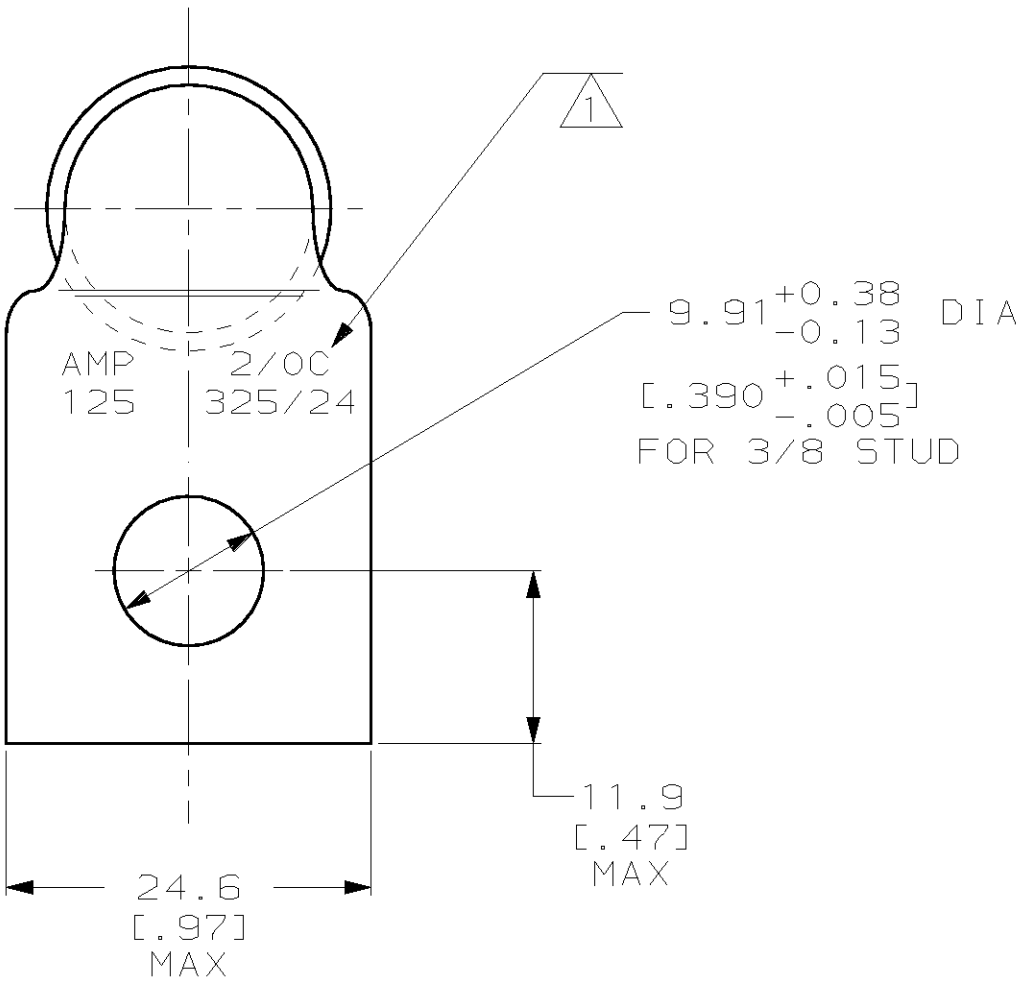

1 STAMP AMP 2/0C 125 325/24 APPROX AS SHOWN

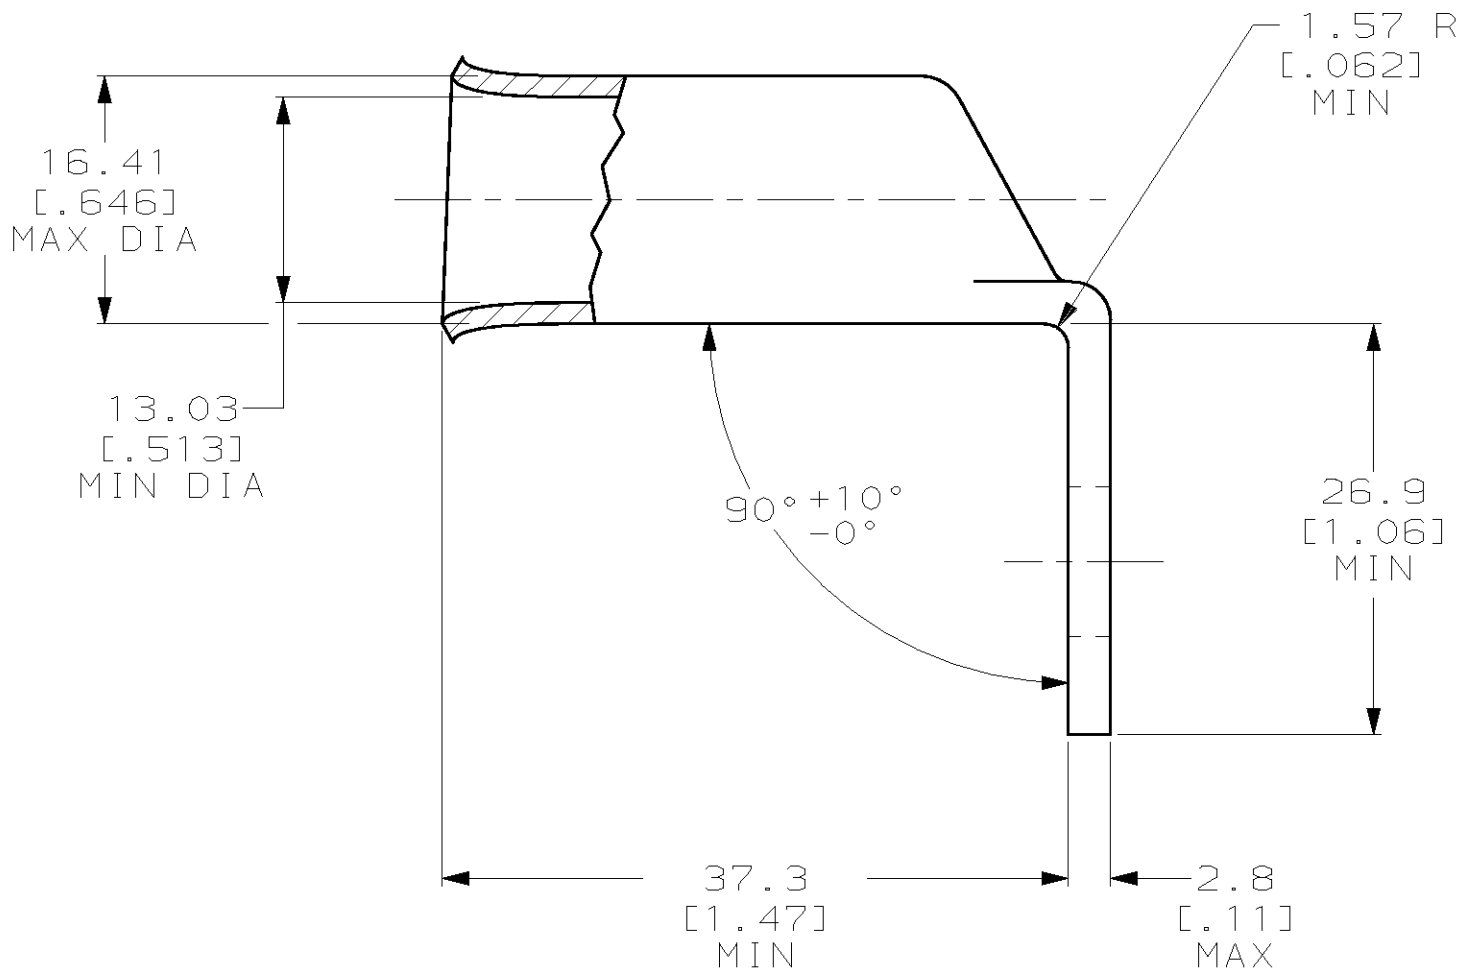

184259-1
PART
NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		RECOMMENDED OPERATING TEMPERATURE: 170° MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 60.6-76.3mm² [119,500-150,500] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN DK SCHRUM 20DEC95	AMP AMP Incorporated Harrisburg, PA 17105-3608		
DIMENSIONS: mm [INCHES]		CHK WJ VOCKROTH 02JAN96			
		APVD JL MECKLEY 02JAN96	NAME TERMINAL, BENT 90, AMPPOWER, WIRE SIZE: 2/0 AWG		
		PRODUCT SPEC 108-30200	SIZE A2		
MATERIAL COPPER PER ASTM B-75 ANNEALED		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH TIN PLATE 0.00381 [0.000150] MIN THK PER ASTM B545	APPLICATION SPEC -	CAGE CODE 00779	DRAWING NO C-184259
CUSTOMER DRAWING			WEIGHT .072 lbs	SCALE 2:1	SHEET 1 OF 1
			REV D		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[184259-1](#)