
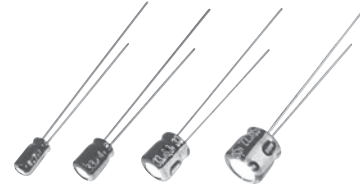


Radial Lead Type

Series : **KS** Type : **A**

Low Profile



Features

- Endurance : 85 °C 1000 h
- 5 mm height
- RoHS compliant


Specifications

Category temperature range	-40 °C to +85 °C	
Rated voltage range	4 V.DC to 50 V.DC	
Capacitance range	2.2 μF to 330 μF	
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	$I \leq 0.01 CV$ or 3 (μA) After 2 minutes (Whichever is greater)	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Endurance	After applying rated working voltage for 1000 hours at +85 °C±2 °C, when the capacitors are restored to 20°C capacitors, shall meet the following limits.	
	Capacitance change	Within ±20 % of the initial value (4 V.DC : ±30 %)
	tan δ	≤ 200 % of the initial limit
Shelf life	DC leakage current	Within the initial limit
	After storage for 1000 hours at +85 °C±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance (With voltage treatment)	

Frequency correction factor for ripple current

Frequency (Hz)	50, 60	120	1 k	10 k to
Correction factor	0.70	1.00	1.30	1.70

Dimensions

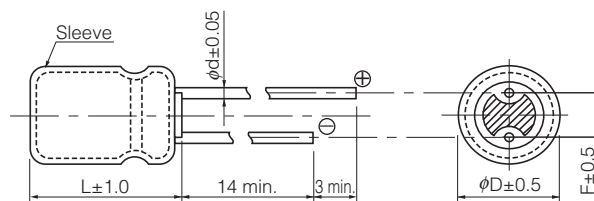

(Unit : mm)

φD	4	5	6.3	8
φd	0.45	0.45	0.45	0.45
F	1.5	2.0	2.5	2.5

Characteristics list

Endurance : 85 °C 1000 h

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Specification		Lead length (mm)			Part No.	Min. Packaging Q'ty		
		φD	L	Ripple current (120 Hz) (+85 °C) (mA r.m.s.)	tan δ (120 Hz) (+20 °C)	Lead dia. φd	Lead space			Straight leads (pcs)	Taping (pcs)	
							Straight	Taping *B				Taping *i
4	33	4	5	26	0.35	0.45	1.5	5.0	2.5	ECEA0GKS330()	200	2000
	47	4	5	34	0.35	0.45	1.5	5.0	2.5	ECEA0GKS470()	200	2000
	100	5	5	61	0.35	0.45	2.0	5.0	2.5	ECEA0GKS101()	200	2000
	220	6.3	5	82	0.35	0.45	2.5	5.0	2.5	ECEA0GKS221()	200	2000
6.3	22	4	5	29	0.24	0.45	1.5	5.0	2.5	ECEA0JKS220()	200	2000
	33	5	5	38	0.24	0.45	2.0	5.0	2.5	ECEA0JKS330()	200	2000
	47	5	5	46	0.24	0.45	2.0	5.0	2.5	ECEA0JKS470()	200	2000
	100	6.3	5	71	0.24	0.45	2.5	5.0	2.5	ECEA0JKS101()	200	2000
	330	8	5	130	0.24	0.45	2.5		2.5	ECEA0JKS331()	200	1000
		8	5	130	0.24	0.45		5.0		ECEA0JKS331Q		1000
10	22	5	5	35	0.20	0.45	2.0	5.0	2.5	ECEA1AKS220()	200	2000
	33	5	5	43	0.20	0.45	2.0	5.0	2.5	ECEA1AKS330()	200	2000
	47	6.3	5	65	0.20	0.45	2.5	5.0	2.5	ECEA1AKS470()	200	2000
	100	6.3	5	80	0.20	0.45	2.5	5.0	2.5	ECEA1AKS101()	200	2000
	220	8	5	120	0.20	0.45	2.5		2.5	ECEA1AKS221()	200	1000
		8	5	120	0.20	0.45		5.0		ECEA1AKS221Q		1000
16	10	4	5	28	0.16	0.45	1.5	5.0	2.5	ECEA1CKS100()	200	2000
	22	5	5	39	0.16	0.45	2.0	5.0	2.5	ECEA1CKS220()	200	2000
	33	6.3	5	60	0.16	0.45	2.5	5.0	2.5	ECEA1CKS330()	200	2000
	47	6.3	5	70	0.16	0.45	2.5	5.0	2.5	ECEA1CKS470()	200	2000
	100	8	5	91	0.16	0.45	2.5		2.5	ECEA1CKS101()	200	1000
		8	5	91	0.16	0.45		5.0		ECEA1CKS101Q		1000
25	4.7	4	5	22	0.14	0.45	1.5	5.0	2.5	ECEA1EKS4R7()	200	2000
	10	5	5	28	0.14	0.45	2.0	5.0	2.5	ECEA1EKS100()	200	2000
	22	6.3	5	55	0.14	0.45	2.5	5.0	2.5	ECEA1EKS220()	200	2000
	33	6.3	5	65	0.14	0.45	2.5	5.0	2.5	ECEA1EKS330()	200	2000
	100	8	5	85	0.14	0.45	2.5		2.5	ECEA1EKS101()	200	1000
		8	5	85	0.14	0.45		5.0		ECEA1EKS101Q		1000
35	3.3	4	5	16	0.12	0.45	1.5	5.0	2.5	ECEA1VKS3R3()	200	2000
	4.7	4	5	22	0.12	0.45	1.5	5.0	2.5	ECEA1VKS4R7()	200	2000
	10	5	5	30	0.12	0.45	2.0	5.0	2.5	ECEA1VKS100()	200	2000
	22	6.3	5	60	0.12	0.45	2.5	5.0	2.5	ECEA1VKS220()	200	2000
	33	8	5	65	0.12	0.45	2.5		2.5	ECEA1VKS330()	200	1000
			8	5	65	0.12	0.45		5.0		ECEA1VKS330Q	
47	8	5	85	0.12	0.45	2.5		2.5	ECEA1VKS470()	200	1000	
	8	5	85	0.12	0.45		5.0		ECEA1VKS470Q		1000	
50	2.2	4	5	16	0.10	0.45	1.5	5.0	2.5	ECEA1HKS2R2()	200	2000
	3.3	4	5	16	0.10	0.45	1.5	5.0	2.5	ECEA1HKS3R3()	200	2000
	4.7	5	5	23	0.10	0.45	2.0	5.0	2.5	ECEA1HKS4R7()	200	2000
	10	6.3	5	35	0.10	0.45	2.5	5.0	2.5	ECEA1HKS100()	200	2000
	22	8	5	60	0.10	0.45	2.5		2.5	ECEA1HKS220()	200	1000
		8	5	60	0.10	0.45		5.0		ECEA1HKS220Q		1000

· When requesting taped product, please put the letter "B" or "i" between the "()". Lead wire pitch *B=5 mm, i=2.5 mm.

· Please refer to the page of "Taping dimensions".

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[ECE-A0JKS470](#) [ECE-A1CKS100](#) [ECE-A1CKS101](#) [ECE-A1CKS220](#) [ECE-A1CKS330B](#) [ECE-A1CKS470I](#) [ECE-A0GKS470](#) [ECE-A0GKS101](#) [ECE-A0GKS330](#) [ECE-A1AKS470](#) [ECE-A1EKS100](#) [ECE-A1AKS101](#) [ECE-A1EKS330](#) [ECE-A1EKS330I](#) [ECE-A1EKS4R7](#) [ECE-A1HKS2R2](#) [ECE-A1VKS220I](#) [ECE-A1VKS330](#) [ECE-A1VKS470](#) [ECE-A1HKS3R3](#) [ECE-A1VKS3R3](#) [ECE-A1CKS470](#) [ECE-A0JKS470I](#) [ECE-A1CKS470B](#) [ECE-A0GKS101B](#) [ECE-A0GKS101I](#) [ECE-A0GKS221](#) [ECE-A0GKS221B](#) [ECE-A0GKS221I](#) [ECE-A0GKS330B](#) [ECE-A0GKS330I](#) [ECE-A0GKS470B](#) [ECE-A0GKS470I](#) [ECE-A0JKS101B](#) [ECE-A0JKS101I](#) [ECE-A0JKS220](#) [ECE-A0JKS220B](#) [ECE-A0JKS220I](#) [ECE-A0JKS330](#) [ECE-A0JKS330B](#) [ECE-A0JKS330I](#) [ECE-A0JKS331](#) [ECE-A0JKS331I](#) [ECE-A0JKS331Q](#) [ECE-A0JKS470B](#) [ECE-A1AKS101B](#) [ECE-A1AKS101I](#) [ECE-A1AKS220](#) [ECE-A1AKS220B](#) [ECE-A1AKS220I](#) [ECE-A1AKS221](#) [ECE-A1AKS221I](#) [ECE-A1AKS221Q](#) [ECE-A1AKS330](#) [ECE-A1AKS330B](#) [ECE-A1AKS330I](#) [ECE-A1AKS470B](#) [ECE-A1AKS470I](#) [ECE-A1CKS100B](#) [ECE-A1CKS100I](#) [ECE-A1CKS101I](#) [ECE-A1CKS101Q](#) [ECE-A1CKS220B](#) [ECE-A1CKS220I](#) [ECE-A1CKS330](#) [ECE-A1CKS330I](#) [ECE-A1EKS100B](#) [ECE-A1EKS100I](#) [ECE-A1EKS101](#) [ECE-A1EKS101I](#) [ECE-A1EKS220](#) [ECE-A1EKS220B](#) [ECE-A1EKS220I](#) [ECE-A1EKS330B](#) [ECE-A1EKS4R7B](#) [ECE-A1EKS4R7I](#) [ECE-A1HKS100](#) [ECE-A1HKS010I](#) [ECE-A1HKS100B](#) [ECE-A1HKS220](#) [ECE-A1HKS220I](#) [ECE-A1HKS220Q](#) [ECE-A1HKS2R2B](#) [ECE-A1HKS2R2I](#) [ECE-A1HKS3R3B](#) [ECE-A1HKS3R3I](#) [ECE-A1HKS4R7](#) [ECE-A1HKS4R7B](#) [ECE-A1HKS4R7I](#) [ECE-A1HKSR47](#) [ECE-A1HKSR47B](#) [ECE-A1HKSR47I](#) [ECE-A1VKS100](#) [ECE-A1VKS100B](#) [ECE-A1VKS100I](#) [ECE-A1VKS220](#) [ECE-A1VKS220B](#) [ECE-A1VKS330I](#) [ECE-A1VKS330Q](#) [ECE-A1VKS3R3B](#)