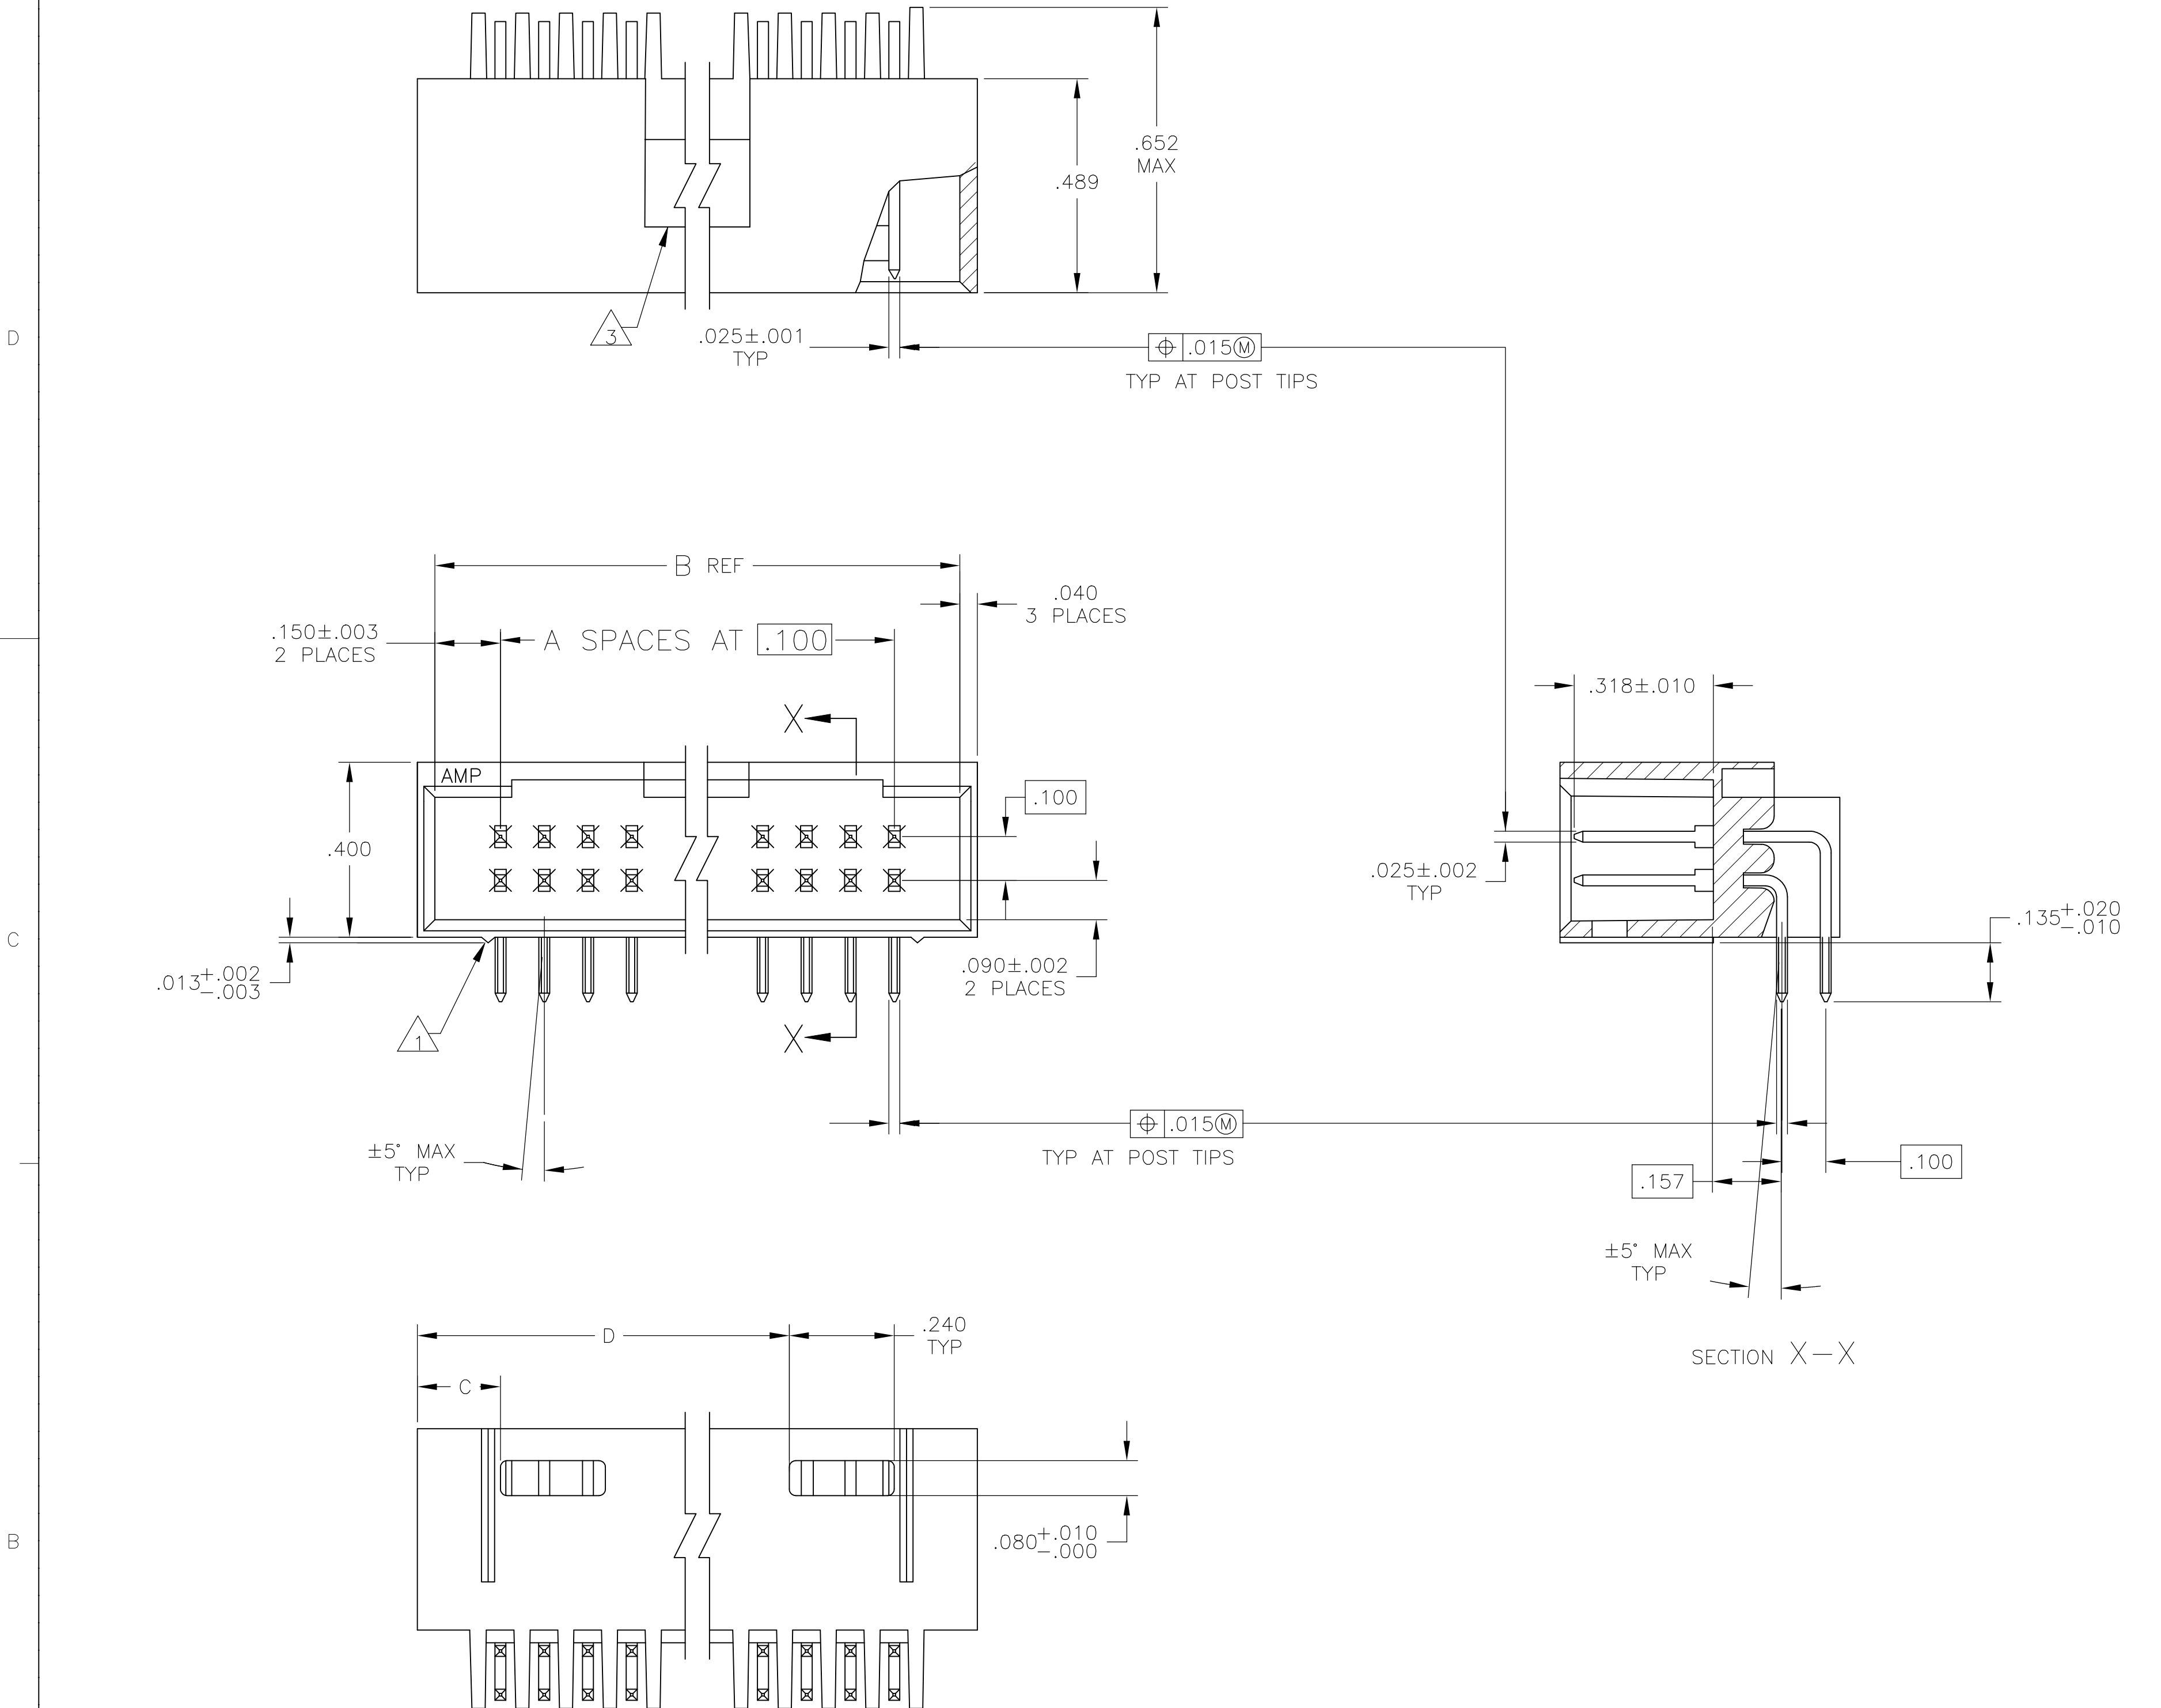



6	OBSELETE	5	3.490	.190	3.800	35	72	8-87577-3
6	OBSELETE	5	3.390	.190	3.700	34	70	8-87577-2
6	OBSELETE	5	3.290	.190	3.600	33	68	8-87577-1
6	OBSELETE	5	3.190	.190	3.500	32	66	8-87577-0
6	OBSELETE	5	3.090	.190	3.400	31	64	7-87577-9
6	OBSELETE	5	2.990	.190	3.300	30	62	7-87577-8
6	OBSELETE	5	2.890	.190	3.200	29	60	7-87577-7
6	OBSELETE	5	2.790	.190	3.100	28	58	7-87577-6
6	OBSELETE	5	2.690	.190	3.000	27	56	7-87577-5
6	OBSELETE	5	2.590	.190	2.900	26	54	7-87577-4
6	OBSELETE	5	2.490	.190	2.800	25	52	7-87577-3
6	OBSELETE	5	2.390	.190	2.700	24	50	7-87577-2
6	OBSELETE	5	2.290	.190	2.600	23	48	7-87577-1
6	OBSELETE	5	2.190	.190	2.500	22	46	7-87577-0
6	OBSELETE	5	2.090	.190	2.400	21	44	6-87577-9
6	OBSELETE	5	1.990	.190	2.300	20	42	6-87577-8
6	OBSELETE	5	1.890	.190	2.200	19	40	6-87577-7
6	OBSELETE	5	1.790	.190	2.100	18	38	6-87577-6
6	OBSELETE	5	1.690	.190	2.000	17	36	6-87577-5
6	OBSELETE	5	1.590	.190	1.900	16	34	6-87577-4
		5	1.490	.190	1.800	15	32	6-87577-3
6	OBSELETE	5	1.390	.190	1.700	14	30	6-87577-2
6	OBSELETE	5	1.290	.190	1.600	13	28	6-87577-1
6	OBSELETE	5	1.190	.190	1.500	12	26	6-87577-0
6	OBSELETE	5	1.090	.190	1.400	11	24	5-87577-9
6	OBSELETE	5	.990	.190	1.300	10	22	5-87577-8
		5	.890	.190	1.200	9	20	5-87577-7
6	OBSELETE	5	—	.490	1.100	8	18	5-87577-6
6	OBSELETE	5	—	.390	1.000	7	16	5-87577-5
		5	—	.390	.900	6	14	5-87577-4
		5	—	.290	.800	5	12	5-87577-3
6	OBSELETE	5	—	.290	.700	4	10	5-87577-2
6	OBSELETE	5	—	.190	.600	3	8	5-87577-1
6	OBSELETE	4	3.490	.190	3.800	35	72	3-87577-3
6	OBSELETE	4	3.390	.190	3.700	34	70	3-87577-2
6	OBSELETE	4	3.290	.190	3.600	33	68	3-87577-1
6	OBSELETE	4	3.190	.190	3.500	32	66	3-87577-0
6	OBSELETE	4	3.090	.190	3.400	31	64	2-87577-9
6	OBSELETE	4	2.990	.190	3.300	30	62	2-87577-8
6	OBSELETE	4	2.890	.190	3.200	29	60	2-87577-7
6	OBSELETE	4	2.790	.190	3.100	28	58	2-87577-6
6	OBSELETE	4	2.690	.190	3.000	27	56	2-87577-5
6	OBSELETE	4	2.590	.190	2.900	26	54	2-87577-4
6	OBSELETE	4	2.490	.190	2.800	25	52	2-87577-3
6	OBSELETE	4	2.390	.190	2.700	24	50	2-87577-2
6	OBSELETE	4	2.290	.190	2.600	23	48	2-87577-1
6	OBSELETE	4	2.190	.190	2.500	22	46	2-87577-0
6	OBSELETE	4	2.090	.190	2.400	21	44	1-87577-9
6	OBSELETE	4	1.990	.190	2.300	20	42	1-87577-8
		4	1.890	.190	2.200	19	40	1-87577-7
6	OBSELETE	4	1.790	.190	2.100	18	38	1-87577-6
6	OBSELETE	4	1.690	.190	2.000	17	36	1-87577-5
6	OBSELETE	4	1.590	.190	1.900	16	34	1-87577-4
SUPERSEDED		4	1.490	.190	1.800	15	32	1-87577-3
6	OBSELETE	4	1.390	.190	1.700	14	30	1-87577-2
6	OBSELETE	4	1.290	.190	1.600	13	28	1-87577-1
6	OBSELETE	4	1.190	.190	1.500	12	26	1-87577-0
6	OBSELETE	4	1.090	.190	1.400	11	24	87577-9
6	OBSELETE	4	.990	.190	1.300	10	22	87577-8
		4	.890	.190	1.200	9	20	87577-7
6	OBSELETE	4	—	.490	1.100	8	18	87577-6
6	OBSELETE	4	—	.390	1.000	7	16	87577-5
		4	—	.390	.900	6	14	87577-4
SUPERSEDED		4	—	.290	.800	5	12	87577-3
		4	—	.290	.700	4	10	87577-2
6	OBSELETE	4	—	.190	.600	3	8	87577-1

PLATING		D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	
THIS DRAWING IS A CONTROLLED DOCUMENT.				11-10-89				
DWN J. GALLUCCI				25-10-89		TE Connectivity		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWG R. FLICKER		NAME		
INCHES		APVD		—		HDR ASSY,MOD II,100X.100 q .025 SQ POST, RT ANGLE W/ DETENTS AND STAND-OFFS		
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLCS ± — ± — ANGLES		PRODUCT SPEC		—		
				APPLICATION SPEC		—		
MATERIAL		FINISH		WEIGHT		SIZE		RESTRICTED TO
HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK CONTACTS: PHOS BRONZE		SEE TABLE		—		A1 00779 C-87577		—
CUSTOMER DRAWING						SCALE 4:1		SHEET 1 of 1
								REV M2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-87577-4](#)