


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			P	REVISED PER ECO-11-004820	21MAR11	RK	HMR

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
OVER 0.00127 [.000050] NICKEL, ENTIRE POST.

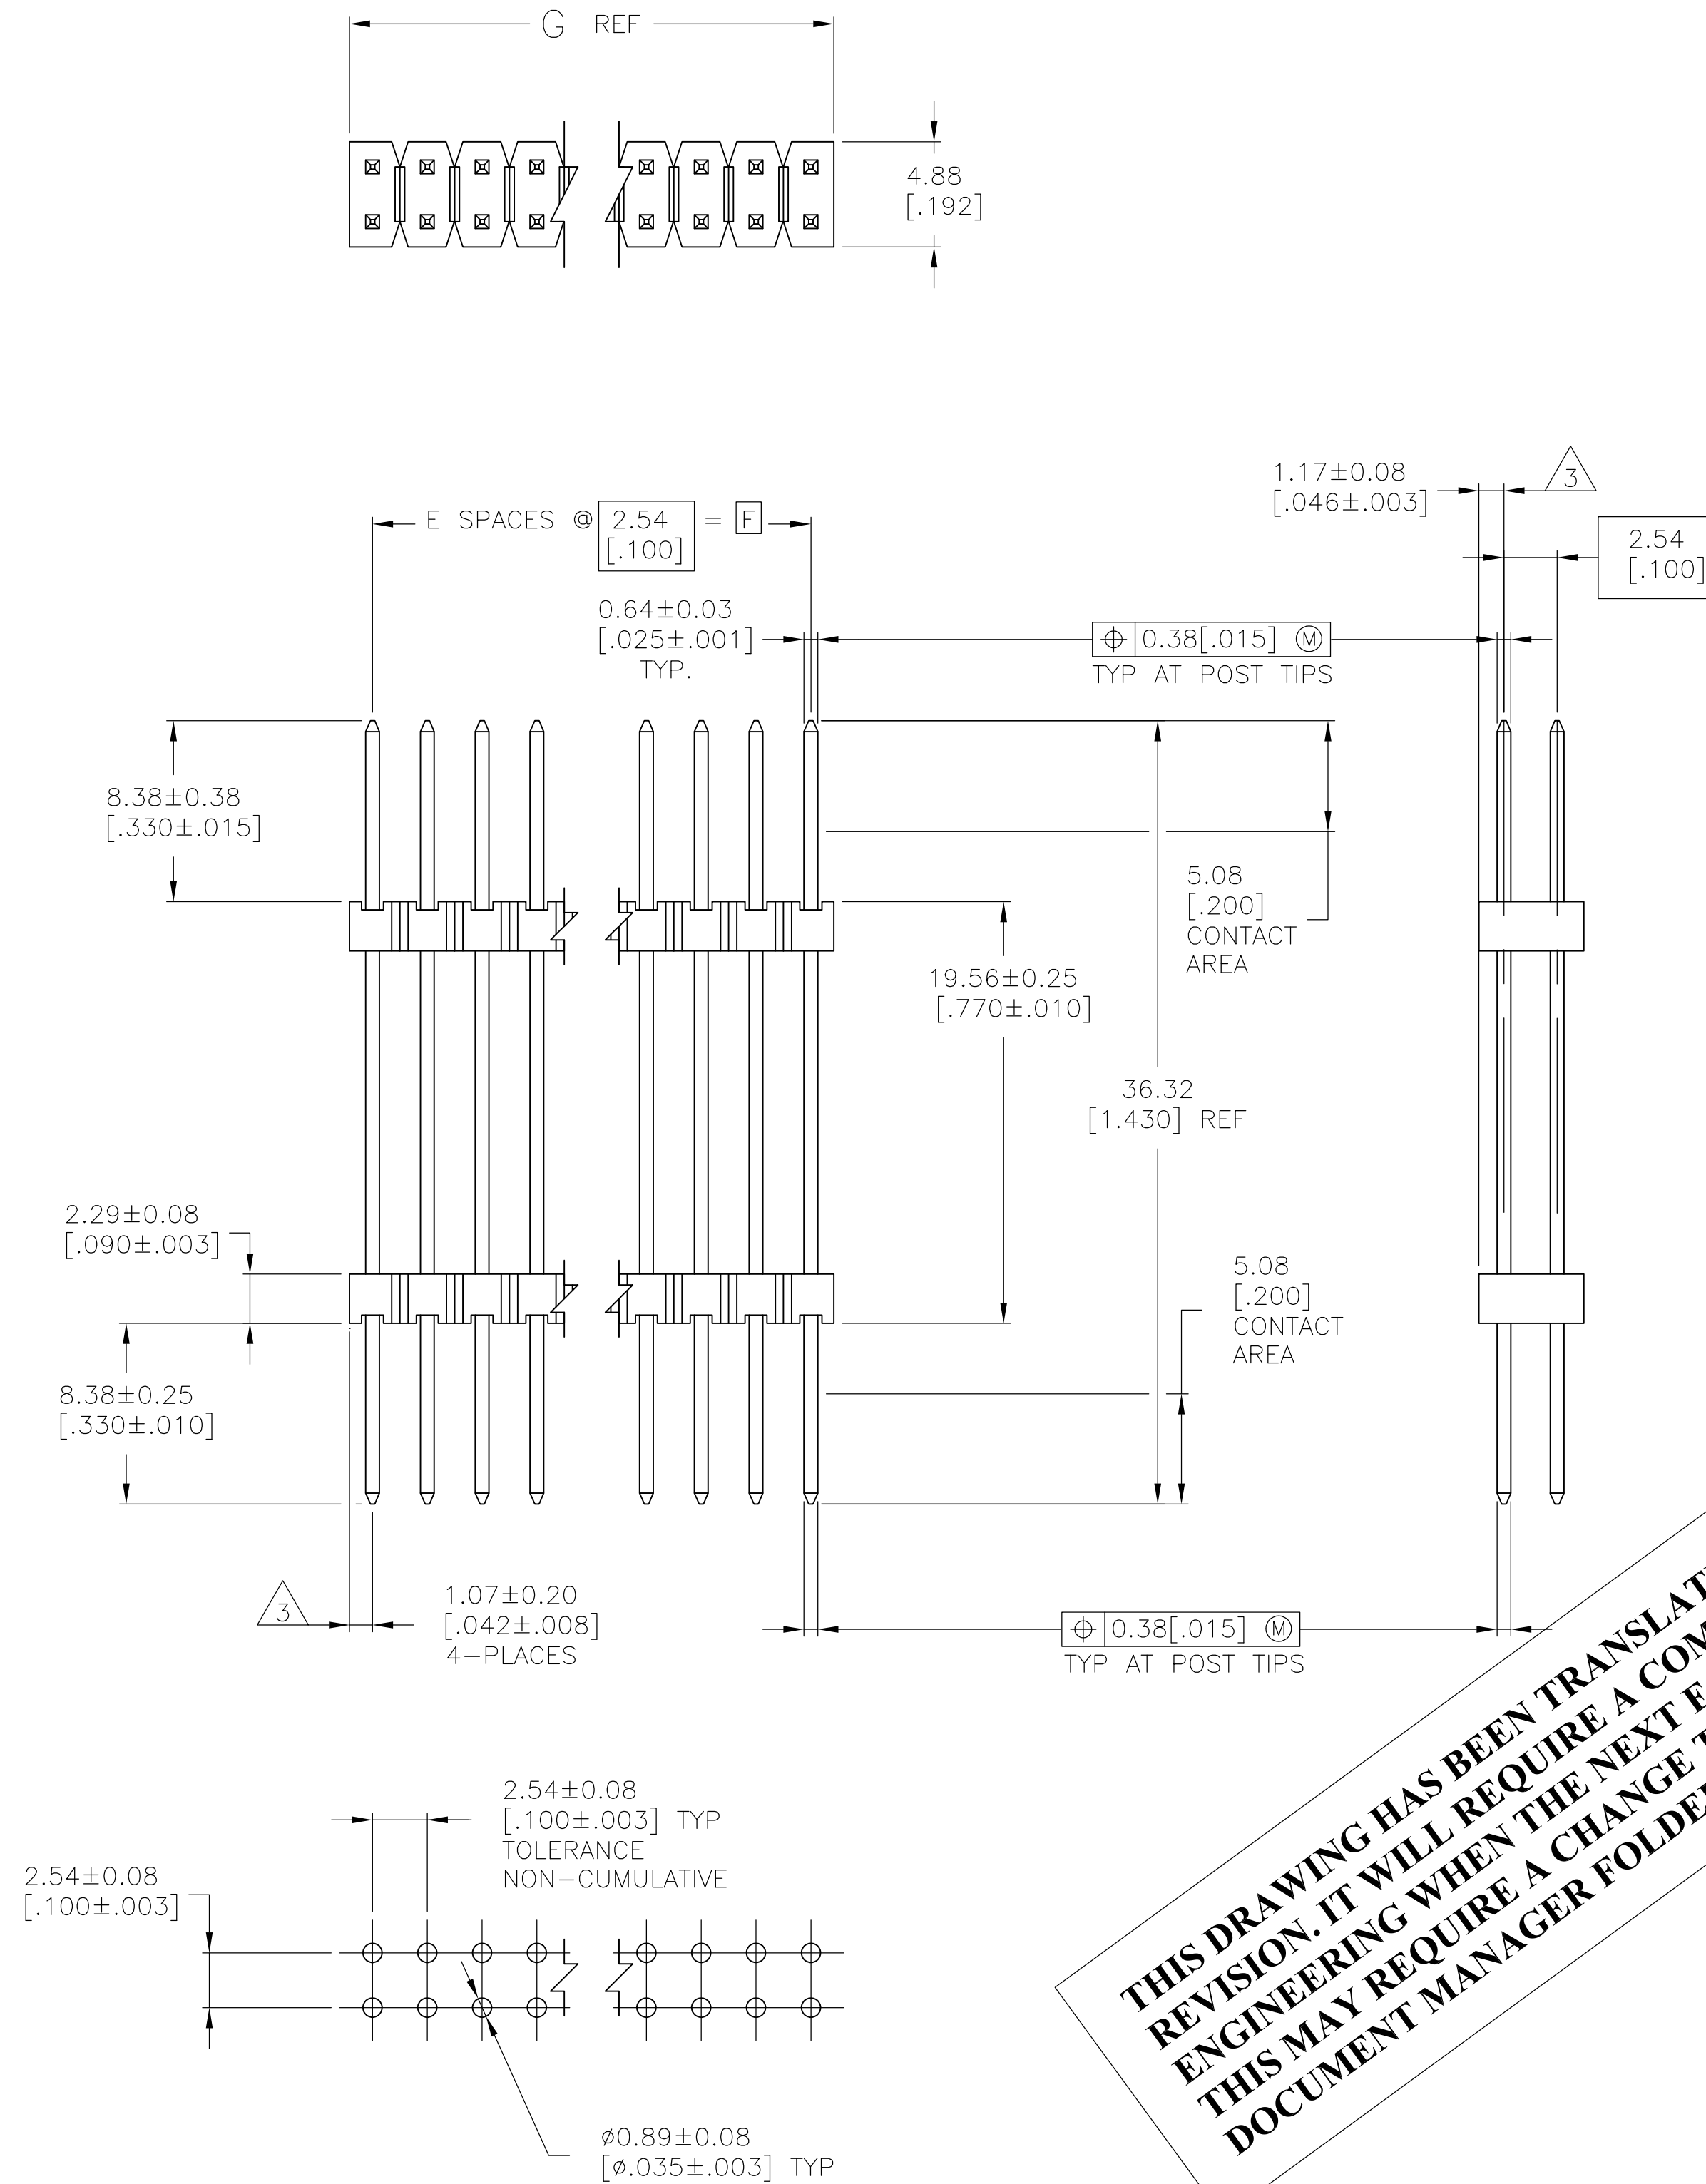

36.32
[1.430] REF

5.08
[.200]
CONTACT
AREA

$\oplus$ 0.38 [.015] (M)

TYP AT POST TIPS

**THIS DRAWING HAS BEEN TRANSLATED AND REFLECTS THE PREVIOUS
REVISION. IT WILL REQUIRE A COMPLETE DRAWING CHECK BY PRODUCT
ENGINEERING WHEN THE NEXT ECO CHANGE IS WRITTEN -
THIS MAY REQUIRE A CHANGE TO THE REVISION OF THE
DOCUMENT MANAGER FOLDER AND THIS DRAWING.**

RECOMMENDED HOLE LAYOUT

101.19 [3.984]	99.06 [3.900]	39	80	4-146510-0
98.65 [3.884]	96.52 [3.800]	38	78	3-146510-9
96.11 [3.784]	93.98 [3.700]	37	76	3-146510-8
93.57 [3.684]	91.44 [3.600]	36	74	3-146510-7
91.03 [3.584]	88.90 [3.500]	35	72	3-146510-6
88.49 [3.484]	86.36 [3.400]	34	70	3-146510-5
85.95 [3.384]	83.82 [3.300]	33	68	3-146510-4
83.41 [3.284]	81.28 [3.200]	32	66	3-146510-3
80.87 [3.184]	78.74 [3.100]	31	64	3-146510-2
78.33 [3.084]	76.20 [3.000]	30	62	3-146510-1
75.79 [2.984]	73.66 [2.900]	29	60	3-146510-0
73.25 [2.884]	71.12 [2.800]	28	58	2-146510-9
70.71 [2.784]	68.58 [2.700]	27	56	2-146510-8
68.17 [2.684]	66.04 [2.600]	26	54	2-146510-7
65.63 [2.584]	63.50 [2.500]	25	52	2-146510-6
63.09 [2.484]	60.96 [2.400]	24	50	2-146510-5
60.55 [2.384]	58.42 [2.300]	23	48	2-146510-4
58.01 [2.284]	55.88 [2.200]	22	46	2-146510-3
55.47 [2.184]	53.34 [2.100]	21	44	2-146510-2
52.93 [2.084]	50.80 [2.000]	20	42	2-146510-1
50.39 [1.984]	48.26 [1.900]	19	40	2-146510-0
47.85 [1.884]	45.72 [1.800]	18	38	1-146510-9
45.31 [1.784]	43.18 [1.700]	17	36	1-146510-8
42.77 [1.684]	40.64 [1.600]	16	34	1-146510-7
40.23 [1.584]	38.10 [1.500]	15	32	1-146510-6
37.69 [1.484]	35.56 [1.400]	14	30	1-146510-5
35.15 [1.384]	33.02 [1.300]	13	28	1-146510-4
32.61 [1.284]	30.48 [1.200]	12	26	1-146510-3
30.07 [1.184]	27.94 [1.100]	11	24	1-146510-2
27.53 [1.084]	25.40 [1.000]	10	22	1-146510-1
24.99 [.984]	22.86 [.900]	9	20	1-146510-0
22.45 [.884]	20.32 [.800]	8	18	146510-9
19.91 [.784]	17.78 [.700]	7	16	146510-8
17.37 [.684]	15.24 [.600]	6	14	146510-7
14.83 [.584]	12.70 [.500]	5	12	146510-6
12.29 [.484]	10.16 [.400]	4	10	146510-5
9.75 [.384]	7.62 [.300]	3	8	146510-4
7.21 [.284]	5.08 [.200]	2	6	146510-3
4.67 [.184]	2.54 [.100]	1	4	146510-2
2.13 [.084]	—	—	2	146510-1
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN E. BRANDBERG 12NOV96		TE Connectivity	
DIMENSIONS: mm [INCHES]		G. DUBNICZKI 12NOV96			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPRO G. DUBNICZKI 12NOV96		NAME	
0 P/LC ± — 1 P/LC ± 0.1 [02] 2 P/LC ± 0.127 [005] 3 P/LC ± 0.127 [005] 4 ANGLES FINISH		PRODUCT SPEC —		HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SO.POST, UNSHROUDED	
MATERIAL		APPLICATION SPEC —		SIZE CASE CODE DRAWING NO RESTRICTED TO	
4		WEIGHT —		A1 00779 C= 146510 —	
5		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 of 1 REV P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-146510-0](#)