

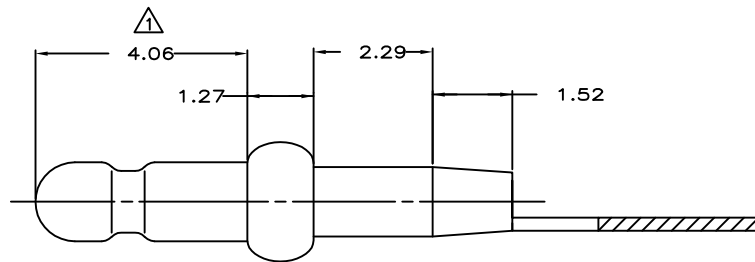


REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APD
AP3		REVISED PER EOR-17-013047	12SEP17	J.Z	D.Z

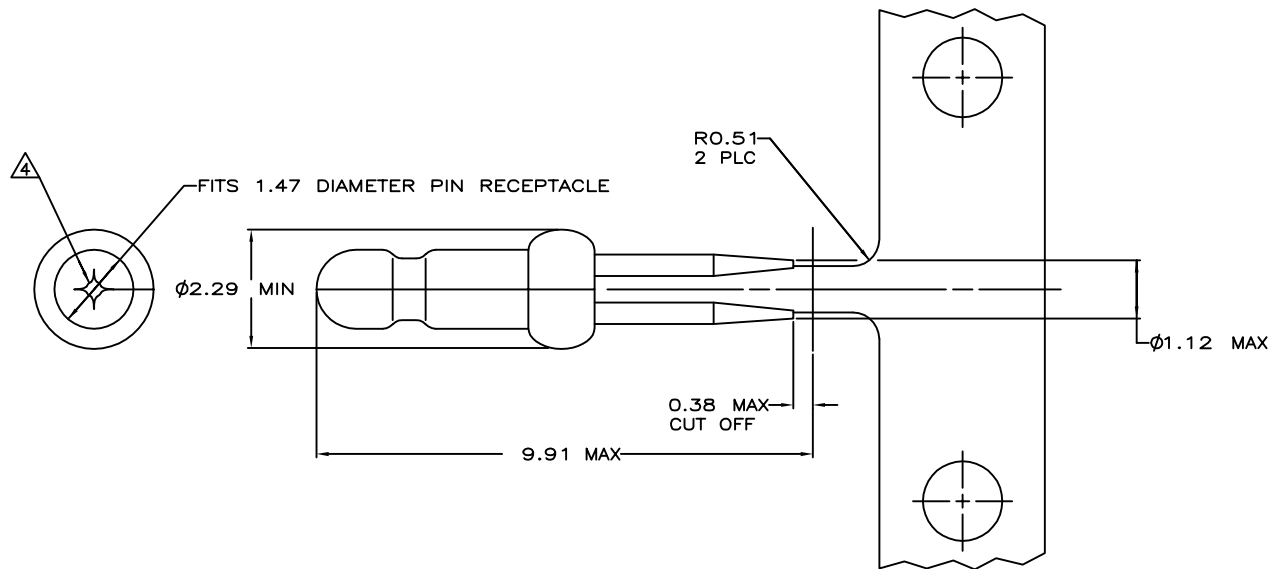

- 0.00076 MIN GOLD PLATING IN THIS AREA WITH 0.00381 MIN MATTE TIN LEAD ON THE REMAINDER, BOTH OVER 0.00127 MIN NICKEL UNDERPLATE.
- FITS 1.17 - 1.27 DIAMETER HOLE IN A 1.57 OR 2.36 PRINTED CIRCUIT BOARD.
- PARTS TO COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 0.05 - 0.25 DIAMETER OPENING REQUIRED IN TIP OF PIN.
- APPLICATOR FEED: 8.00 - 8.26
- 0.00076 MIN GOLD PLATING IN THIS AREA WITH 0.00381 MIN MATTE TIN ON THE REMAINDER, BOTH OVER 0.00127 MIN NICKEL UNDERPLATE.

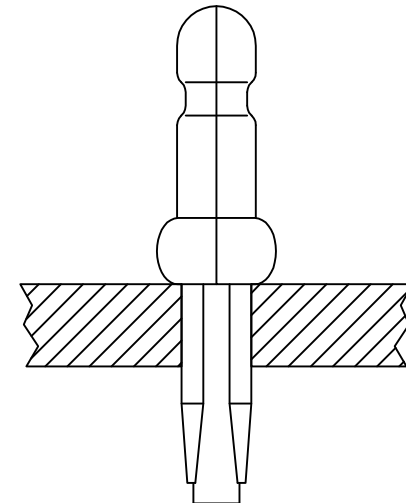

0.13	.005	1.17	.046	2.29	.090	9.91	.390
0.05	.002	1.12	.044	1.57	.062	8.26	.325
0.00381	0.000150	0.51	.020	1.52	.060	8.00	.315
0.00127	0.000050	0.38	.015	1.47	.058	4.06	.160
0.00076	0.000030	0.25	.010	1.27	.050	2.36	.093
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN T. BECK 7-28-97	 TE Connectivity			
DIMENSIONS: mm		CHK R. SWING 7-28-97			NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APD A. BEDDICK 9-10-97	PIN, .058 DIAMETER, PHOSPHOR BRONZE, PRESS FIT, P.C. CONTACT			
	0 PLC ± -	PRODUCT SPEC	RESTRICTED TO			
	1 PLC ± -	108-1025				
	2 PLC ± 0.13	APPLICATION SPEC				
	3 PLC ± -	114-1008				
	4 PLC ± -	WEIGHT				
ANGLES ± -	0.000000	A2	00779	C-60802		
MATERIAL 0.25 PH BRZ	SEE TABLE	CUSTOMER DRAWING		SCALE 15:1	SHEET 1 of 1	REV AP3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[60802-6](#)