

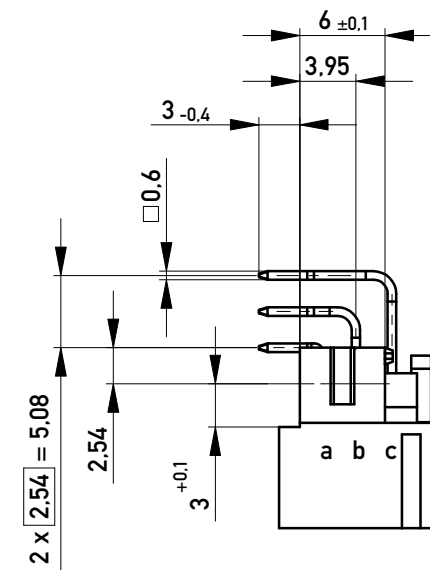


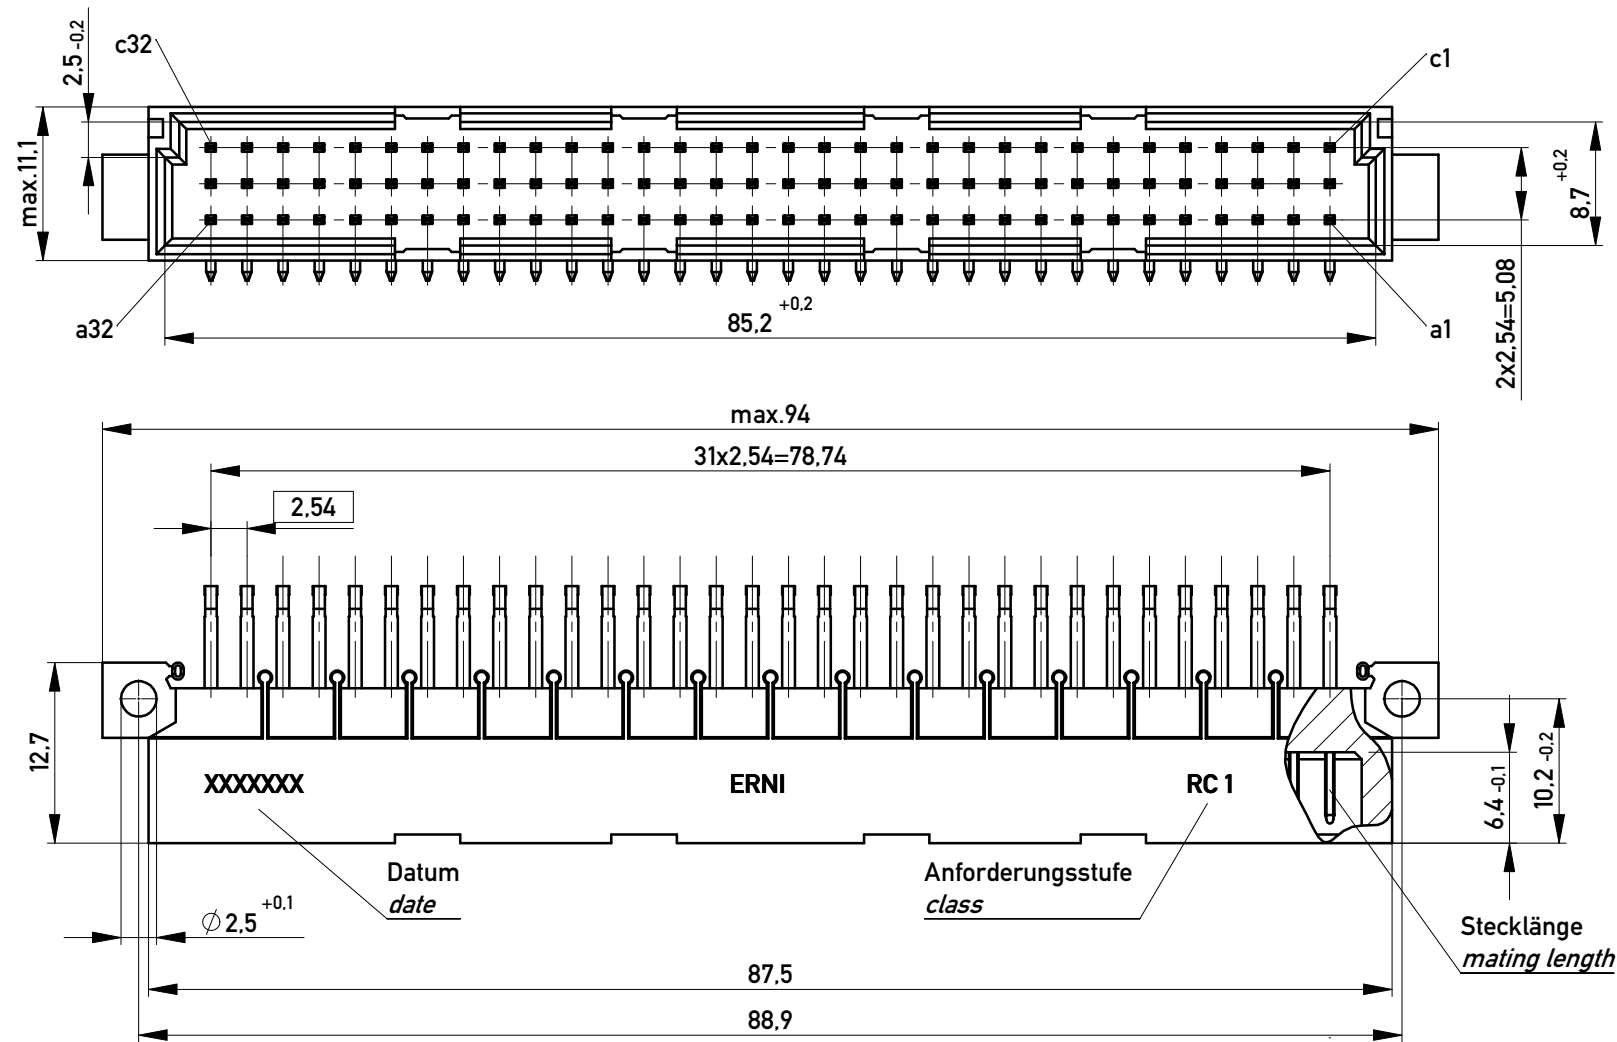

Stecklänge / mating length




E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

Bestückungsplan / contact layout

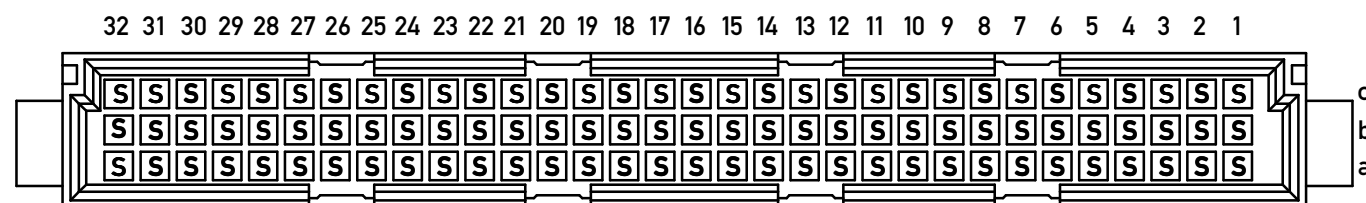

Isolierwerkstoff / housing material : PBT GF 30

Bauart 4 / type 4


Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Lötanschluss 0,6x0,6mm / solder terminal 0,6x0,6mm


Leiterplatten-Lochbild / PCB drillhole pattern

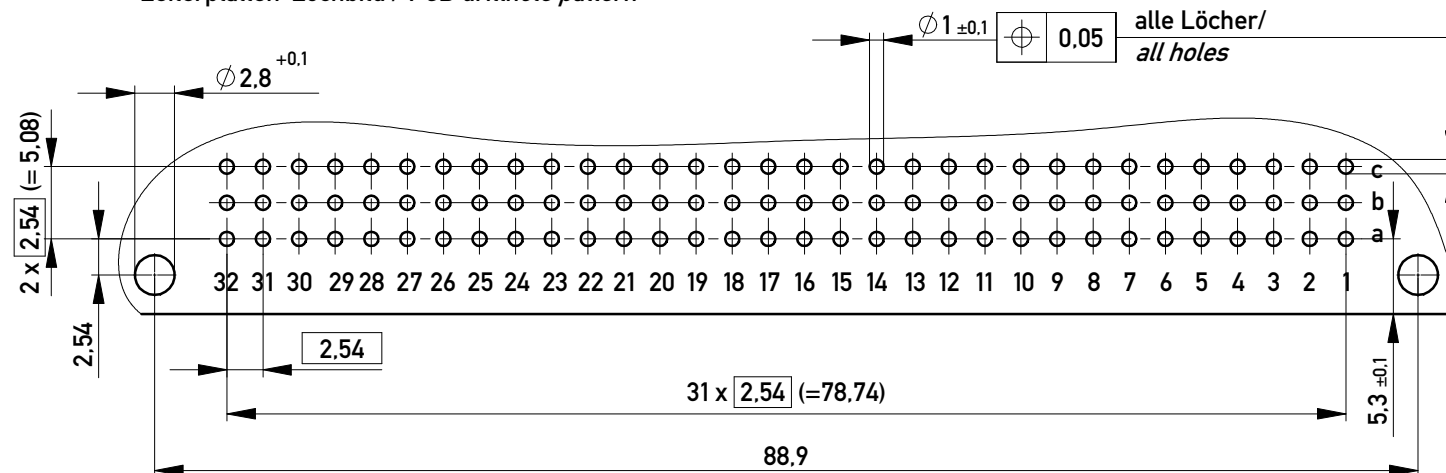

Bedruckung siehe Zeichnung 294905

marking see drawing 294905

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 2:1				
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation						
						Messerleiste C 96 Löt <i>Male Connector C96 solder</i>						
				b		22.06.2017				www.ERNI.com		374543
Index		Date						Class		STVC		A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[374543](#)