




(2.54 mm) .100"

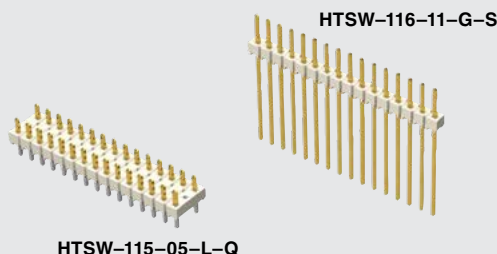

TSW-209-09-F-S-RA

# THROUGH-HOLE .025" SQ POST HEADER

## Board Mates:

SSW, SSQ, SSM, ESW, ESQ, BCS, BSW, CES, SLW

## Cable Mates:

IDSD, IDSS

## SPECIFICATIONS

For complete specifications see [www.samtec.com?TSW](http://www.samtec.com?TSW) or [www.samtec.com?HTSW](http://www.samtec.com?HTSW)

### Insulator Material:

TSW: Black Glass Filled Polyester

HTSW: Natural Liquid

Crystal Polymer

### Terminal Material:

Phosphor Bronze

### Plating:

Au or Sn over 50 μm (1.27 μm) Ni

### Operating Temp Range:

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

### Voltage Rating:

550 VAC mated with SSW;

500 VAC mated with

BCS or ESQ;

450 VAC -RA/-RE mated with

BCS or SSM

400 VAC mated with CES

RoHS Compliant: Yes

Lead-Free Solderable:

HTSW: Yes

TSW: No, Lead Wave Only

### CURRENT RATING (PER PIN)

#### TSW mated with

| ESW   | SSW   | SLW   | SSQ   | SSM   | BCS   | SNT   |
|-------|-------|-------|-------|-------|-------|-------|
| 5.2 A | 5.7 A | 5.2 A | 6.3 A | 5.2 A | 4.6 A | 4.3 A |

2 POSITIONS POWERED

## TYPE STRIP

TSW = Standard Strip

HTSW = Hi-Temp Strip


## PIN CENTERS

-1 = .100" (2.54 mm) Centers, All Positions Filled

-2 = .200" (5.08 mm) Centers, Every Other Position Filled


## NO. PINS PER ROW

### Straight Pin Versions

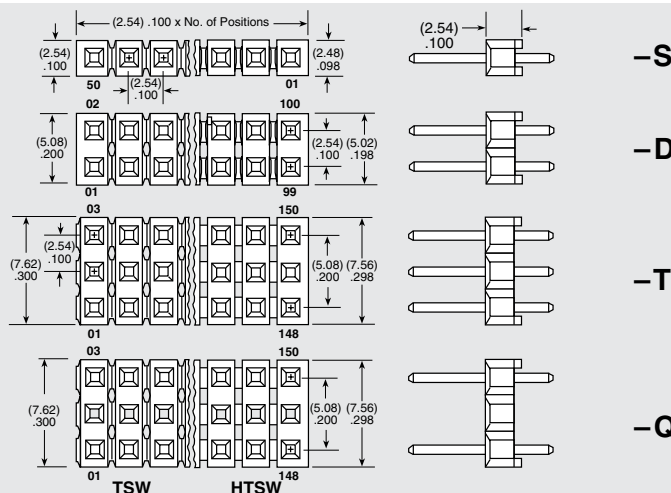

01 thru 50  
= .100" (2.54 mm)  
Center Version

### Right-Angle Versions

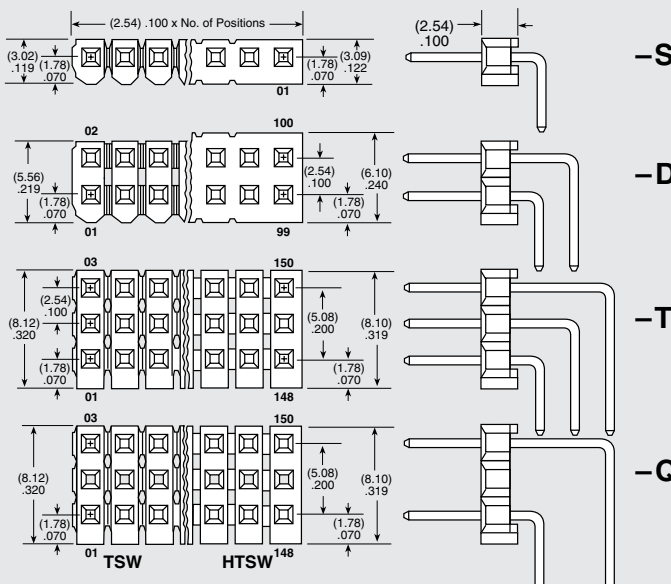

02 thru 25  
= .200" (5.08 mm)  
Center Version

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



### APPLICATIONS

SSW TSW

HORIZONTAL

## ALSO AVAILABLE (MOQ Required)

- Other platings

### Note:

Some lengths, styles and options are non-standard, non-returnable.


Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)



All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

TSW-109-10-F-D-RA



TSW-112-07-F-T



HTSW-120-13-T-D



TSW-114-16-G-S-RE

## TSW, HTSW SERIES

## LEAD STYLE

## PLATING OPTION

## ROW OPTION

## OTHER OPTIONS

## -F

= Gold flash on post, Matte Tin on tail

## -L

= 10  $\mu$ " (0.25  $\mu$ m) Gold on post, Matte Tin on tail

## -G

= 10  $\mu$ " (0.25  $\mu$ m) Gold on post, Gold flash on balance

## -T

= Matte Tin

## -S

= Single Row

## -D

= Double Row

## -T

= Triple Row


## -Q

= Double Row  
(5.08 mm)  
.200" row space


## -RA or -RE

= Right-angle

## -NA

= Right-angle  
(using straight body for coplanar mating with SSW-RA series)

## -LC

= Locking Clip  
(Styles -08 thru  
-13 & -22 only)Requires 4 pin minimum  
(NA with -T, -Q, -RA or -RE)

## -LL

= Locking Lead

Two leads per strip crimped in  
opposite directions on or near  
centerline. See charts for available  
styles. N/A with single row 1 or 2  
positions. Recommended hole size  
(1.02 mm  $\pm$  0.03 mm) .040"  $\pm$  .001"

## -LA

= -RA Option  
with -LL Option

## -"XXX"

= Polarized Position


## OTHER SOLUTIONS

- Elevated Right-angle option
- Shunts

## Straight Pin Versions

(Specify "LEAD STYLE" from chart)

| STYLE | A               | B                 | C               |
|-------|-----------------|-------------------|-----------------|
| * -05 | (3.30)<br>.130  | (8.51)<br>.335    | (2.67)<br>.105  |
| * -06 | (2.41)<br>.095  | (7.62)<br>.300    | (2.67)<br>.105  |
| * -07 | (2.54)<br>.100  | (10.92)<br>.430   |                 |
| * -08 | (5.08)<br>.200  | (13.46)<br>.530   |                 |
| * -09 | (10.16)<br>.400 | (18.54)<br>.730   | (5.84)<br>.230  |
| * -10 | (12.70)<br>.500 | (21.08)<br>.830   |                 |
| * -11 | (15.24)<br>.600 | (23.62)<br>.930   |                 |
| * -12 | (17.78)<br>.700 | (26.16)<br>.1.030 |                 |
| * -13 | (22.86)<br>.900 | (31.24)<br>.1.230 |                 |
| * -14 | (2.79)<br>.110  | (13.46)<br>.530   | (8.13)<br>.320  |
| * -15 | (7.87)<br>.310  | (18.54)<br>.730   | (13.21)<br>.520 |
| * -16 | (2.79)<br>.110  | (21.08)<br>.830   | (15.74)<br>.620 |

\* Available with -LL  
(Locking Lead) Option

Specify -07 for best mate with IDXX Series IDC Cable


| STYLE | A                 | B                 | C                 |
|-------|-------------------|-------------------|-------------------|
| * -18 |                   | (23.62)<br>.930   | (18.29)<br>.720   |
| * -19 | (2.79)<br>.110    | (26.16)<br>.1.030 | (20.83)<br>.820   |
| * -20 |                   | (31.24)<br>.1.230 | (25.91)<br>.1.020 |
| * -21 |                   | (36.32)<br>.1.430 | (30.99)<br>.1.220 |
| * -22 | (7.62)<br>.300    | (16.00)<br>.630   | (5.84)<br>.230    |
| * -23 | (2.92)<br>.115    | (11.30)<br>.445   | (6.73)<br>.265    |
| * -24 | (5.33)<br>.210    | (16.00)<br>.630   | (8.13)<br>.320    |
| * -25 | (3.20)<br>.126    | (11.58)<br>.456   |                   |
| * -26 | (25.40)<br>.1.000 | (33.78)<br>.1.330 | (5.84)<br>.230    |
| * -27 | (20.32)<br>.800   | (28.70)<br>.1.130 |                   |
| * -28 | (23.11)<br>.910   | (33.78)<br>.1.330 | (8.13)<br>.320    |
| * -29 | (18.03)<br>.710   | (28.70)<br>.1.130 |                   |
| * -30 | (0.89)<br>.035    | (9.27)<br>.365    | (5.84)<br>.230    |
| * -41 | (1.27)<br>.050    | (11.94)<br>.470   | (8.13)<br>.320    |

+ Style -41 & -42 available  
with HTSW only.▲ Except: Style -26  
(0.46) .018 DIA Tail

## Right-Angle Versions

(Specify "LEAD STYLE" from chart and select -RA or -RE from other options)

| -RA LEAD STYLE | SINGLE (-S)     |                | DOUBLE (-D)     |                 | TRIPLE (-T & -Q) |   |
|----------------|-----------------|----------------|-----------------|-----------------|------------------|---|
|                | A               | C              | A               | A               | A                | A |
| * -08          | (2.29)<br>.090  |                | (2.29)<br>.090  | (2.29)<br>.090  |                  |   |
| * -09          | (7.37)<br>.290  |                | (7.37)<br>.290  | (7.37)<br>.290  |                  |   |
| * -10          | (9.91)<br>.390  | (5.84)<br>.230 | (9.91)<br>.390  | (9.91)<br>.390  |                  |   |
| * -11          | (12.45)<br>.490 |                | (12.45)<br>.490 | (12.45)<br>.490 |                  |   |
| * -12          | (14.99)<br>.590 |                | (14.99)<br>.590 | (14.99)<br>.590 |                  |   |
| * -13          | (20.07)<br>.790 |                | (20.07)<br>.790 | N/A             |                  |   |
| * -16          | (5.08)<br>.200  | (8.13)<br>.320 | (5.08)<br>.200  | (5.08)<br>.200  |                  |   |
| * -21          | (25.15)<br>.990 | (5.84)<br>.230 | N/A             | N/A             |                  |   |
| * -22          | (4.83)<br>.190  |                | (4.83)<br>.190  | (4.83)<br>.190  |                  |   |
| * -25          | (2.54)<br>.100  | (8.13)<br>.320 | (2.54)<br>.100  | (2.54)<br>.100  |                  |   |
| * -27          | (22.61)<br>.890 | (5.84)<br>.230 | N/A             | N/A             |                  |   |
| * -28          | (17.53)<br>.690 |                | (17.53)<br>.690 | N/A             |                  |   |
| * -29          | (20.32)<br>.800 | (8.13)<br>.320 | N/A             | N/A             |                  |   |
| * -30          | (15.24)<br>.600 |                | (15.24)<br>.600 | N/A             |                  |   |

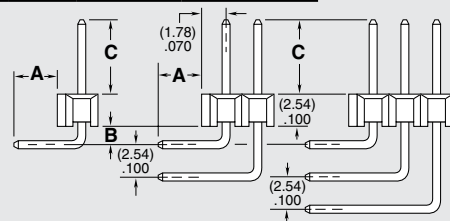\* Available with -LA  
(Locking Lead) Option

| LEAD STYLE | B              |
|------------|----------------|
| -RA        | (1.52)<br>.060 |
| -RE        | (4.06)<br>.160 |

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[TSW-107-22-G-D](#)