








**TMMH SERIES**

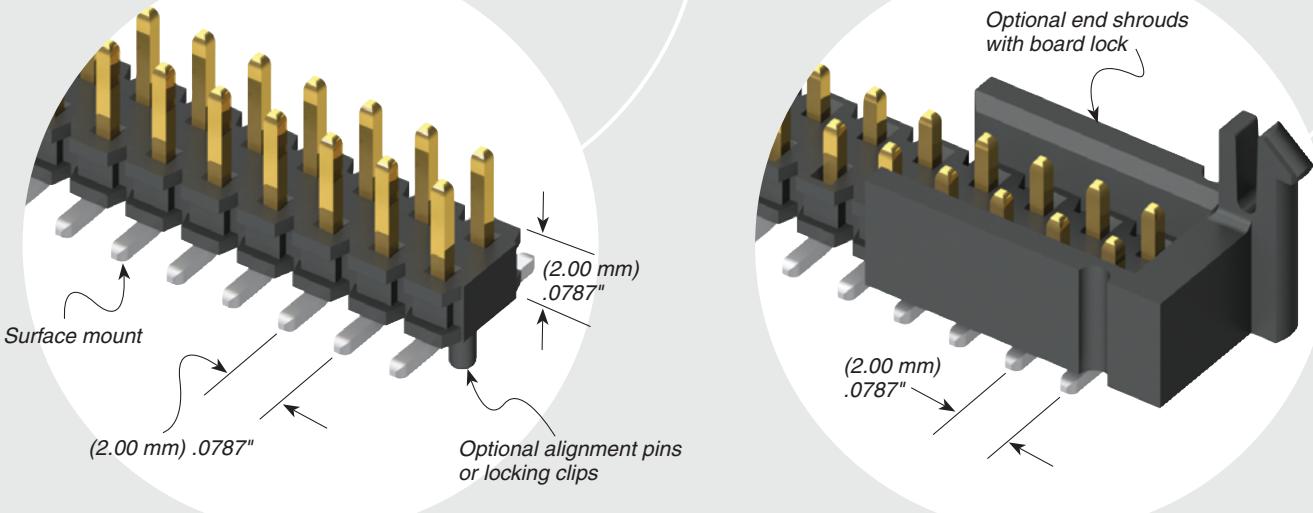

## DV

## FLEX SHROUD OPTIONS

LEAD STYLE	X	Y
-01	(5.84) .230	(4.45) .175
-04 & -05	(4.50) .177	(3.02) .119

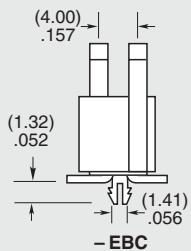

All Flex Shroud options require 9 pins/row minimum  
(For board-to-board interfaces. Will not mate with TCSD)

### -ES

= End Shroud

(For best cost also see TSH Series)

### -EC

= End Shroud with Locking Clip  
(For best cost also see TSH Series)  
(Manual placement required)

### -EP

= End Shroud with Guide Post

### -EL

= End Shroud with Board Lock  
(Boards are positively locked and cannot be unmated)

### -EBC

= End Shroud with Board Lock and Locking Clip  
(Boards are positively locked and cannot be unmated)

### -EPC

= End Shroud with Guide Post and Locking Clip  
(Manual placement required)

## OTHER OPTIONS

### -“XXX”

= Polarized Position. Specify position of omitted pin

### -A

= Alignment Pin  
(3 positions minimum)  
(Not available with -LC)

### -LC





= Locking Clip  
(5 positions minimum)  
(Not available with -A)  
(Manual placement required)

### -M

= Pick & Place Pad  
(5 positions minimum)

### -TR

= Tape & Reel Packaging  
(36 positions maximum)  
(Flex Shroud options not available  
except -ES, -EP & -EL)



*Due to technical progress, all designs, specifications and components are subject to change without notice.*

**WWW.SAMTEC.COM**

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec](#):

[TMMH-110-01-G-D](#)