

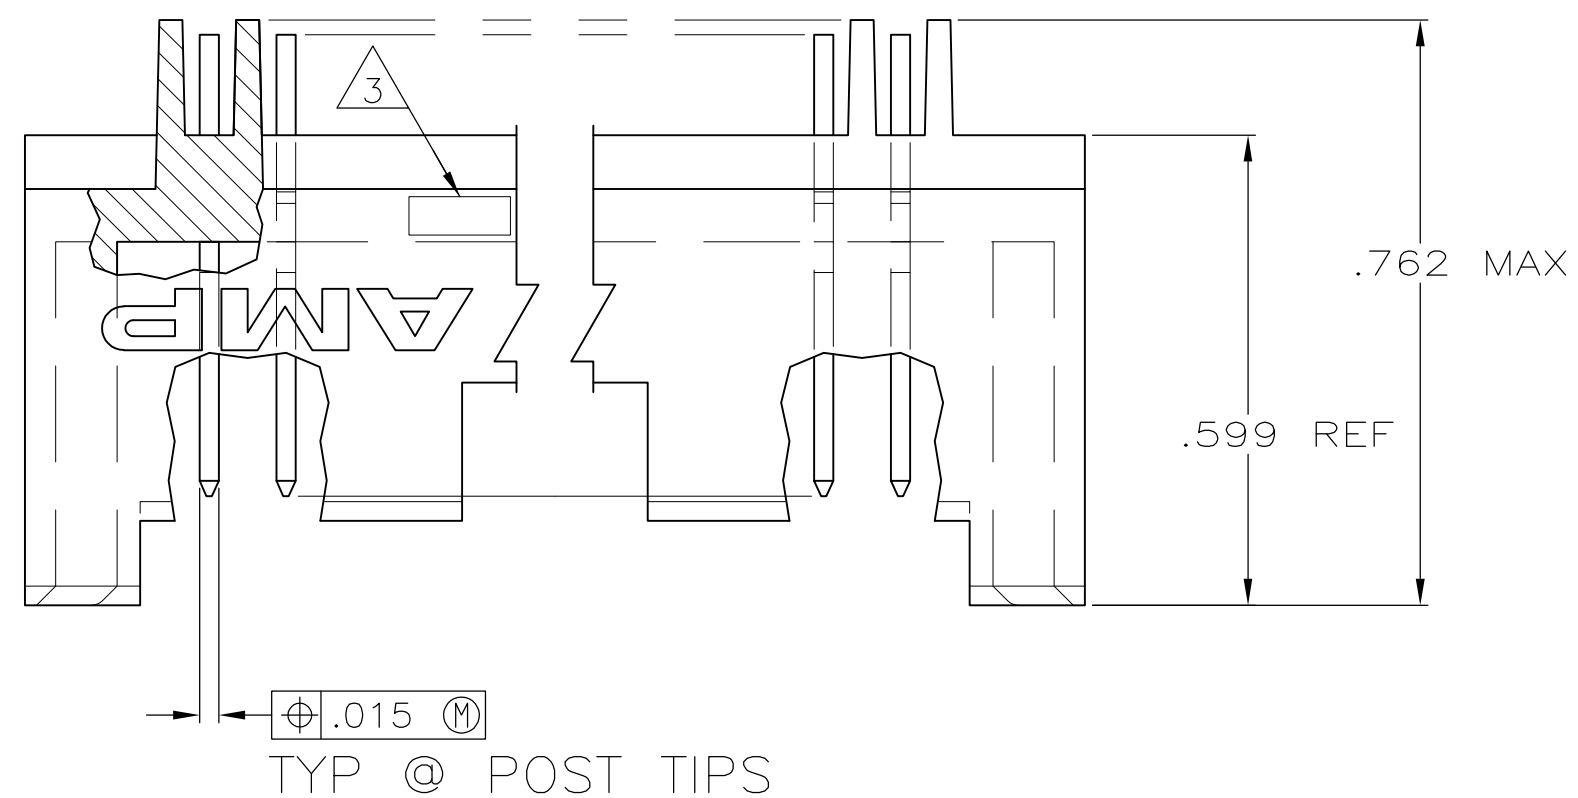



LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			L2	REVISED PER ECO-09-017580	30JUL09	HMR	JO
			L3	REVISED PER ECO-10-000445	20JAN10	KK	HMR

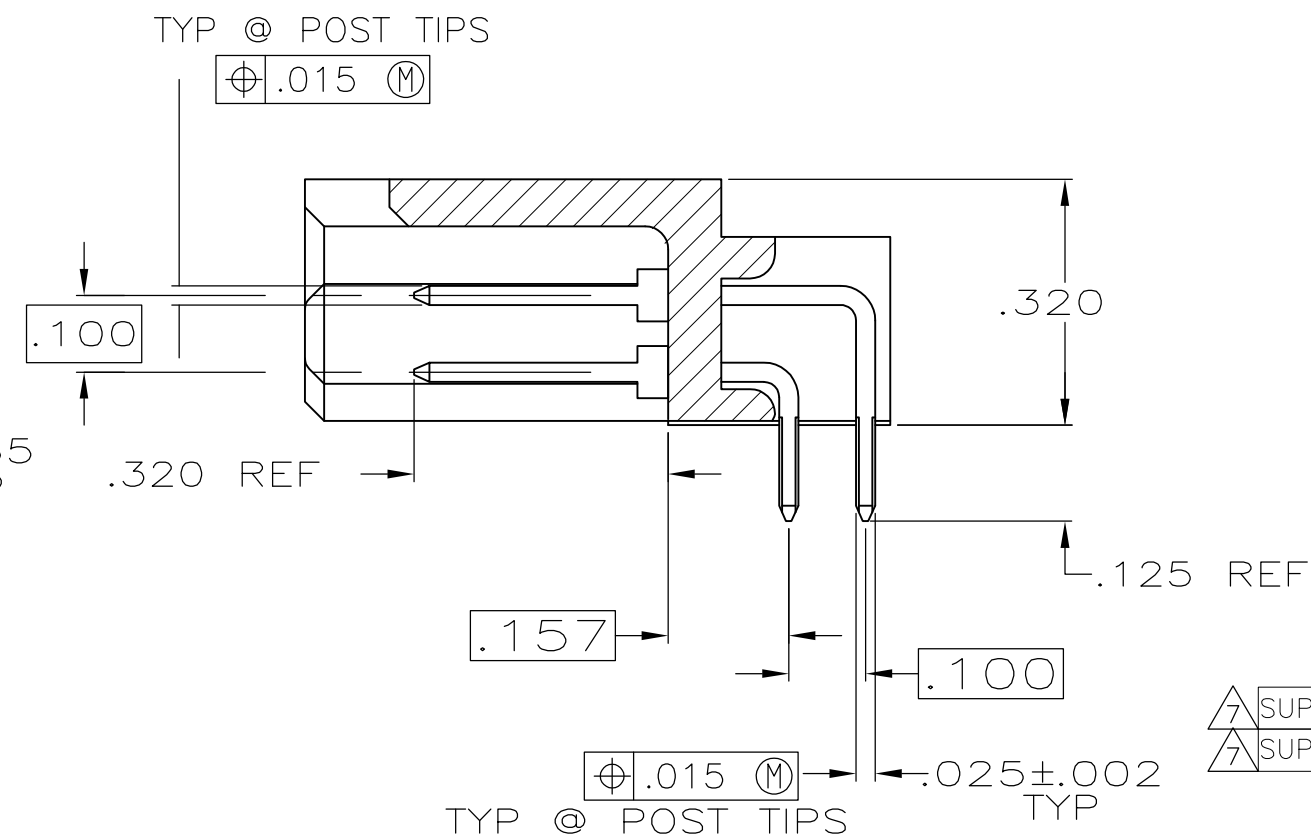

- | | | |
|---|--|---|
| 1 | MATERIAL: HSG FLAME RETARDANT THERMOPLASTIC,
COLOR: BLACK. POSTS: PHOS BRONZE | |
| 2 | .000030 GOLD ON CONTACT AREA,
.000100—.000200 BRIGHT TIN-LEAD ON SOLDER
LEADS, ALL OVER .000050 NICKEL | |
| 3 | RECESSED DATE CODE AND CSA LOGO | |
| 4 | .000030 GOLD ON CONTACT AREA,
.000100—.000200 MATTE TIN ON SOLDER LEADS,
ALL OVER .000050 NICKEL | |
| 5 | ROHS 2002/95/EC COMPLIANT | 7 |
| 6 | PRELIMINARY PART | 7 |
| 7 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI | 7 |

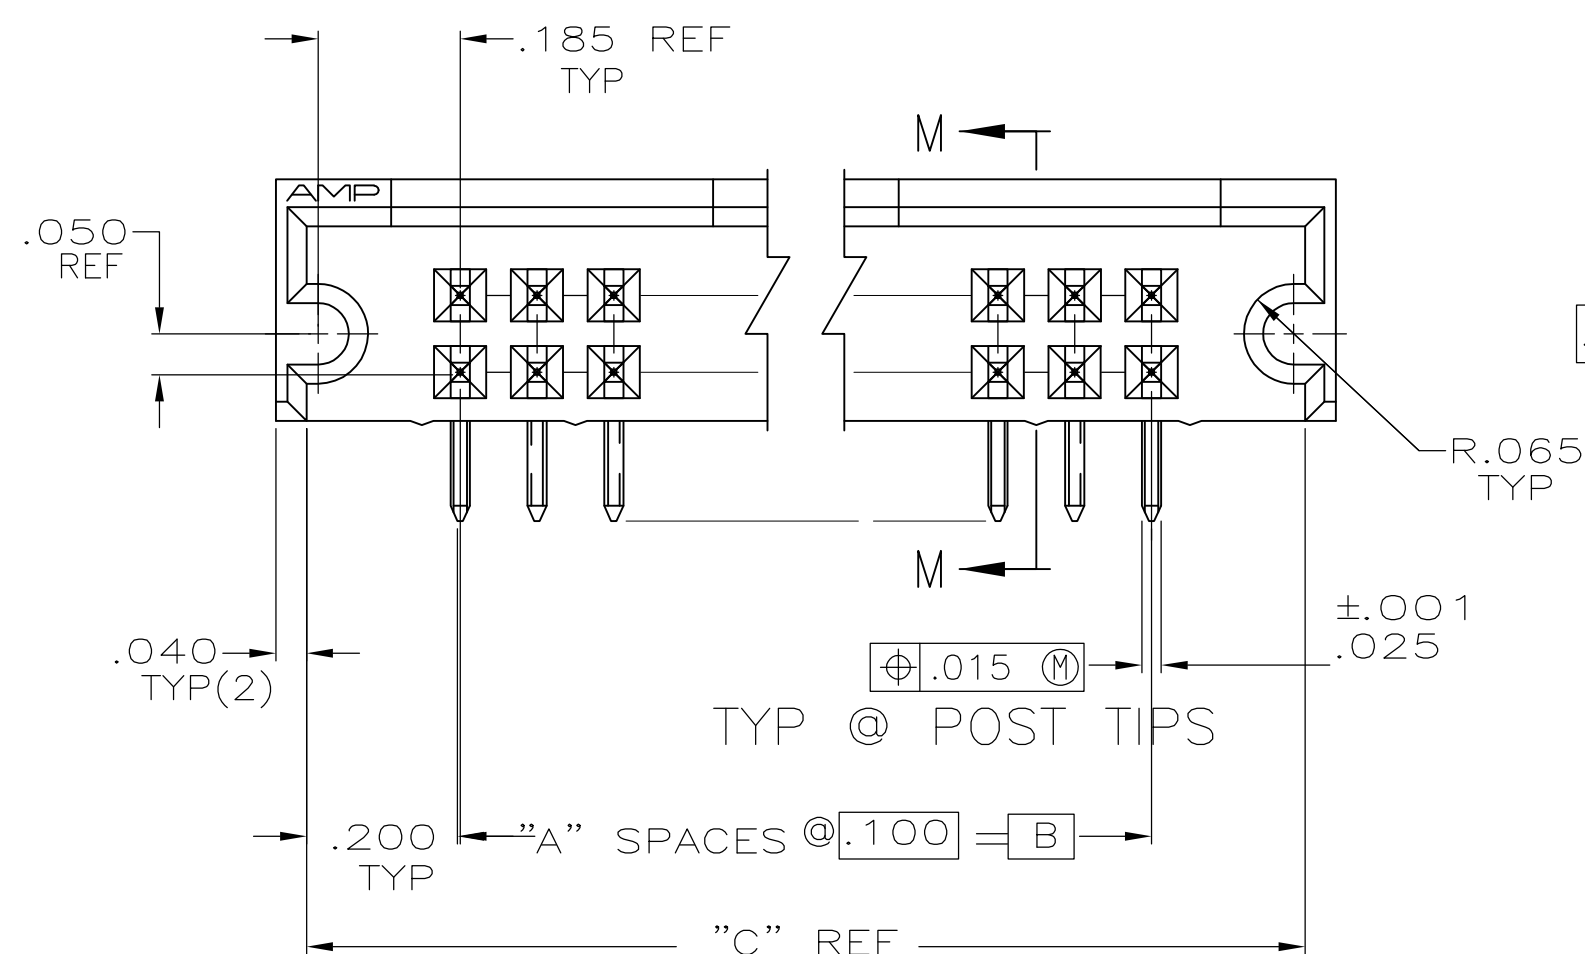

SECTION M-M

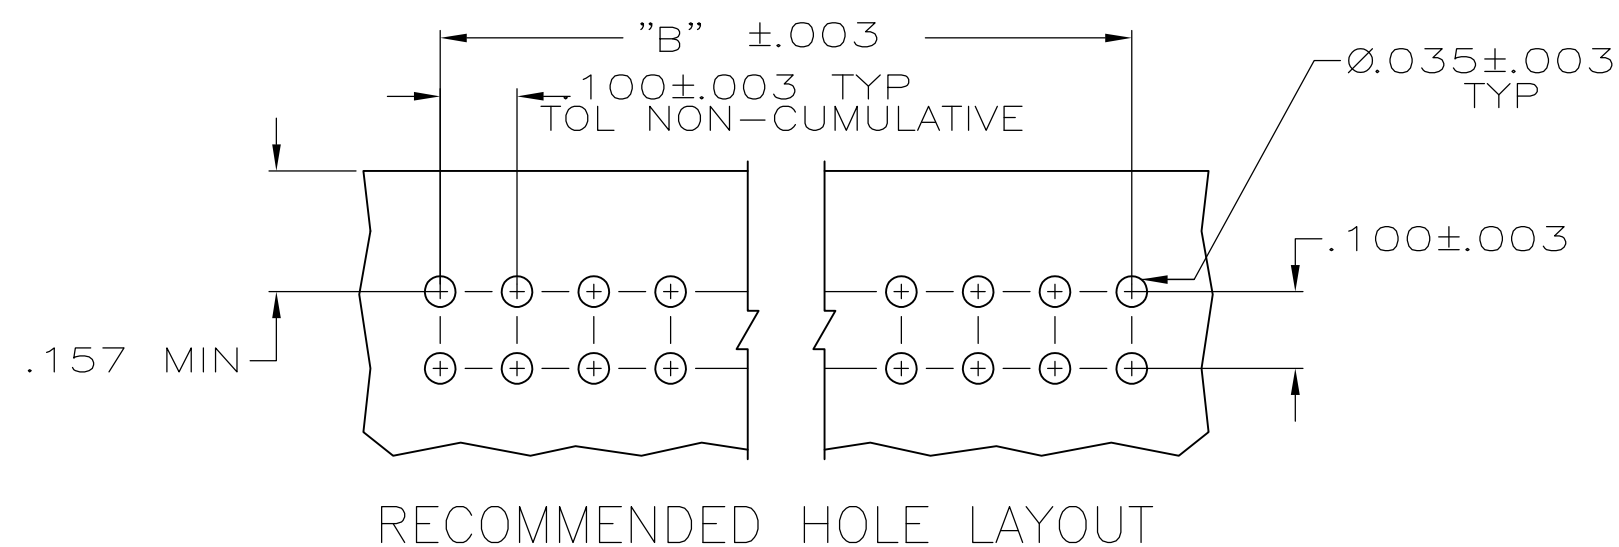

ADS,		4	1.000	.600	6	14	6	7-102802-6	
	OBSOLETE		.800	.400	4	10	5	7-102802-5	
	OBSOLETE		8.300	7.900	79	160	5	7-102802-4	
	OBSOLETE		2.500	2.100	21	44	5	7-102802-3	
	OBSOLETE		7.700	7.300	73	148	5	7-102802-2	
	7		OBSOLETE	6.800	6.400	64	130	5	6-102802-9
	OBSOLETE		4.600	4.200	42	86	5	6-102802-8	
	7		OBSOLETE	3.900	3.500	35	72	5	6-102802-7
	NG			1.800	1.400	14	30	5	6-102802-6
				1.300	.900	9	20	5	6-102802-5
		1.100	.700	7	16	5	6-102802-4		
7		OBSOLETE	1.500	1.100	11	24	5	6-102802-3	
		.900	.500	5	12	5	6-102802-2		
		—	—	—	—		—		
7		OBSOLETE	4.800	4.400	44	90	5	6-102802-0	
		3.300	2.900	29	60	5	5-102802-9		
		2.300	1.900	19	40	5	5-102802-8		
		OBSOLETE	3.800	3.400	34	70	5	5-102802-7	
		OBSOLETE	5.300	4.900	49	100	5	5-102802-6	
	7	OBSOLETE	4.300	3.900	39	80	5	5-102802-5	
		2.800	2.400	24	50	5	5-102802-4		
		2.100	1.700	17	36	5	5-102802-3		
	7	OBSOLETE	6.300	5.900	59	120	5	5-102802-2	
		—	—	—			—		
		7	OBSOLETE	.800	.400	4	10		2-102802-5
		OBSOLETE	8.300	7.900	79	160		2-102802-4	
		OBSOLETE	2.500	2.100	21	44		2-102802-3	
		OBSOLETE	7.700	7.300	73	148		2-102802-2	
7		OBSOLETE	6.800	6.400	64	130		1-102802-9	
OBSOLETE		4.600	4.200	42	86		1-102802-8		
		3.900	3.500	35	72		1-102802-7		
		1.800	1.400	14	30		1-102802-6		
BY 6-102802-5		1.300	.900	9	20		1-102802-5		
BY 6-102802-4		1.100	.700	7	16		1-102802-4		
	7	OBSOLETE	1.500	1.100	11	24		1-102802-3	
		.900	.500	5	12		1-102802-2		
		—	—	—	—		—		
	7	OBSOLETE	4.800	4.400	44	90		1-102802-0	
		3.300	2.900	29	60		102802-9		
		2.300	1.900	19	40		102802-8		
		OBSOLETE	3.800	3.400	34	70		102802-7	
		OBSOLETE	5.300	4.900	49	100		102802-6	
	7	OBSOLETE	4.300	3.900	39	80		102802-5	
		2.800	2.400	24	50		102802-4		
		2.100	1.700	17	36		102802-3		
	7	OBSOLETE	6.300	5.900	59	120		102802-2	
		—	—	—	—		—		
	FINISH	”C”	”B”	”A”	NO OF POSN		PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER	30MAR00		 Tyco Electronics Corporation Harrisburg, PA 17105-3608							
		CHK J. GESFORD	30MAR00									
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. GESFORD	NAME ASSY, HEADER, MOD II, .025 SQ POSTS .100X.100CL, DOUBLE ROW, RIGHT ANGLE WITH GUIDE PINS							
		0 PLC ± -		PRODUCT SPEC								
		1 PLC ± -		-								
		2 PLC ± -		APPLICATION SPEC								
		3 PLC ± 0.13[.005]		-								
		4 PLC ± ± -										
MATERIAL		FINISH		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
		SEE TABLE		-	A2	00779	C-102802	-				
CUSTOMER DRAWING							SCALE	4:1	SHEET	1 of 1	REV	13

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[102802-8](#)