

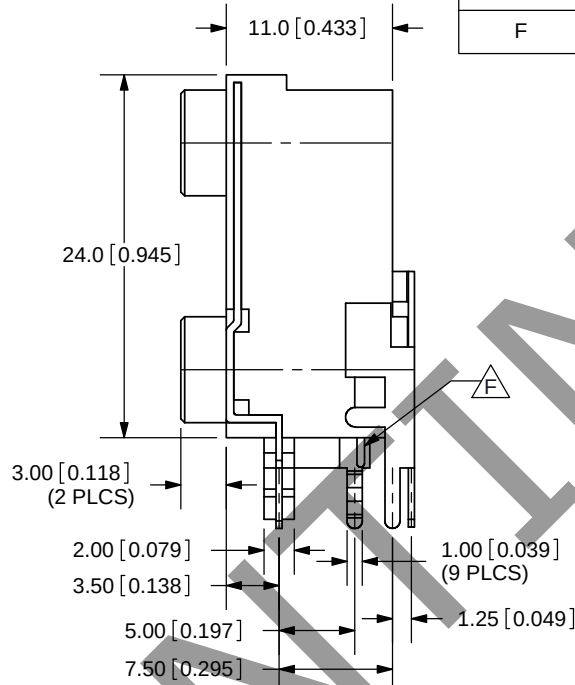
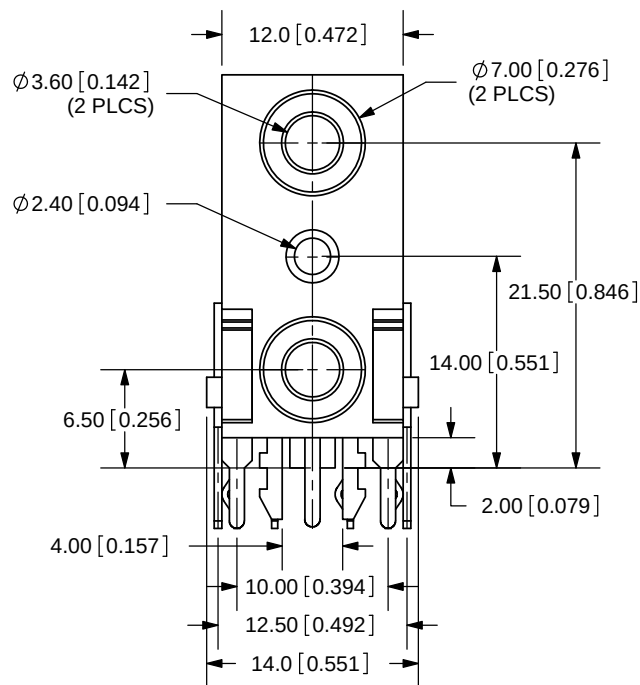


REV.	DESCRIPTION	DATE
C	added kinked pins	1/7/10
D	tolerance and dimension update	2/23/2010
E	housing material change	2/9/2011
F	rib added to pin for strength, plastic and terminal material corrected	4/19/2013

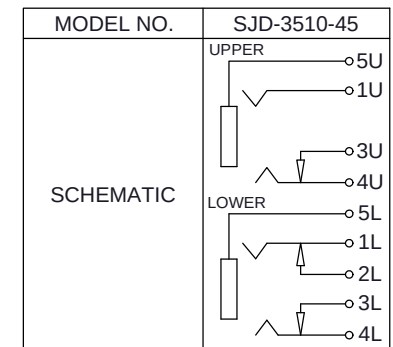

Scale: 1:1

**SPECIFICATIONS:**

RATING: 16V DC @ 0.3A

CONTACT RESISTANCE: 50m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN: 500V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE


LIFE: 5,000 CYCLES

OPERATING TEMPERATURE: -25~85 °C

TOLERANCE:

X.X ±0.3mm

X.XX ±0.2mm

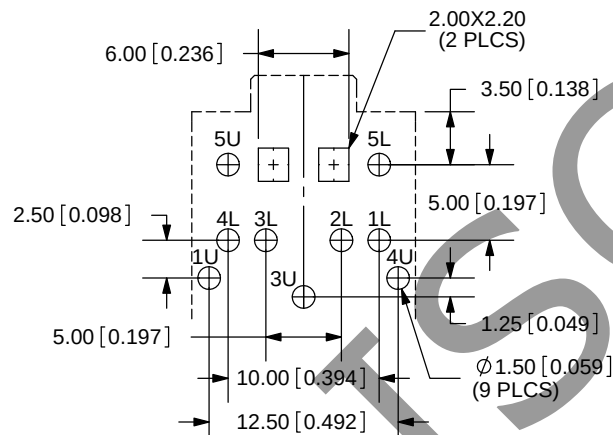PCB LAYOUT
TOP VIEW

	MATERIAL	PLATING
TERMINAL 1U	Copper Alloy	Tin
TERMINAL 3U	Copper Alloy	Tin
TERMINAL 4U	Copper Alloy	Tin
TERMINAL 5U	Copper Alloy	Tin
TERMINAL 1L	Copper Alloy	Tin
TERMINAL 2L	Copper Alloy	Tin
TERMINAL 3L	Copper Alloy	Tin
TERMINAL 4L	Copper Alloy	Tin
TERMINAL 5L	Copper Alloy	Tin
COVER	PBT	
HOUSING	PA-46	

**CUI INC**

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE: DUAL STACK 3.5mm STEREO JACK PCB MT.

REV: F

PART NO. SJD-3510-45

UNITS: MM [INCHES]

DRAWN BY: RDS

APPROVED BY:

SCALE: 2:1

PC FILE NAME:
SJD-3510-45

COPYRIGHT 2013 BY CUI INC.