


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
DF	S0		C	REV PER ECO-05-002595		07-05	AA DE

1. MARKED PER MIL-STD-130.
- 2

TOLERANCE OF LEAD LENGTH:  
UP TO 24 INCHES [609.6] =  $\pm .12$  [ $\pm 3.0$ ]  
24 INCHES [609.6] & UP = 1%
3. OPERATING VOLTAGE: 50 KVDC AT 0 TO 70,000 FEET,  
-55°C TO 125°C.
- 4

PIGTAIL IS SOLDER DIPPED.
5. TO MATE WITH WITH AMP LGH-4  
RECEPTACLE WITH 2.00 [50.80] BARREL DEPTH.
- 6

INSULATION CUT, BUT NOT REMOVED.

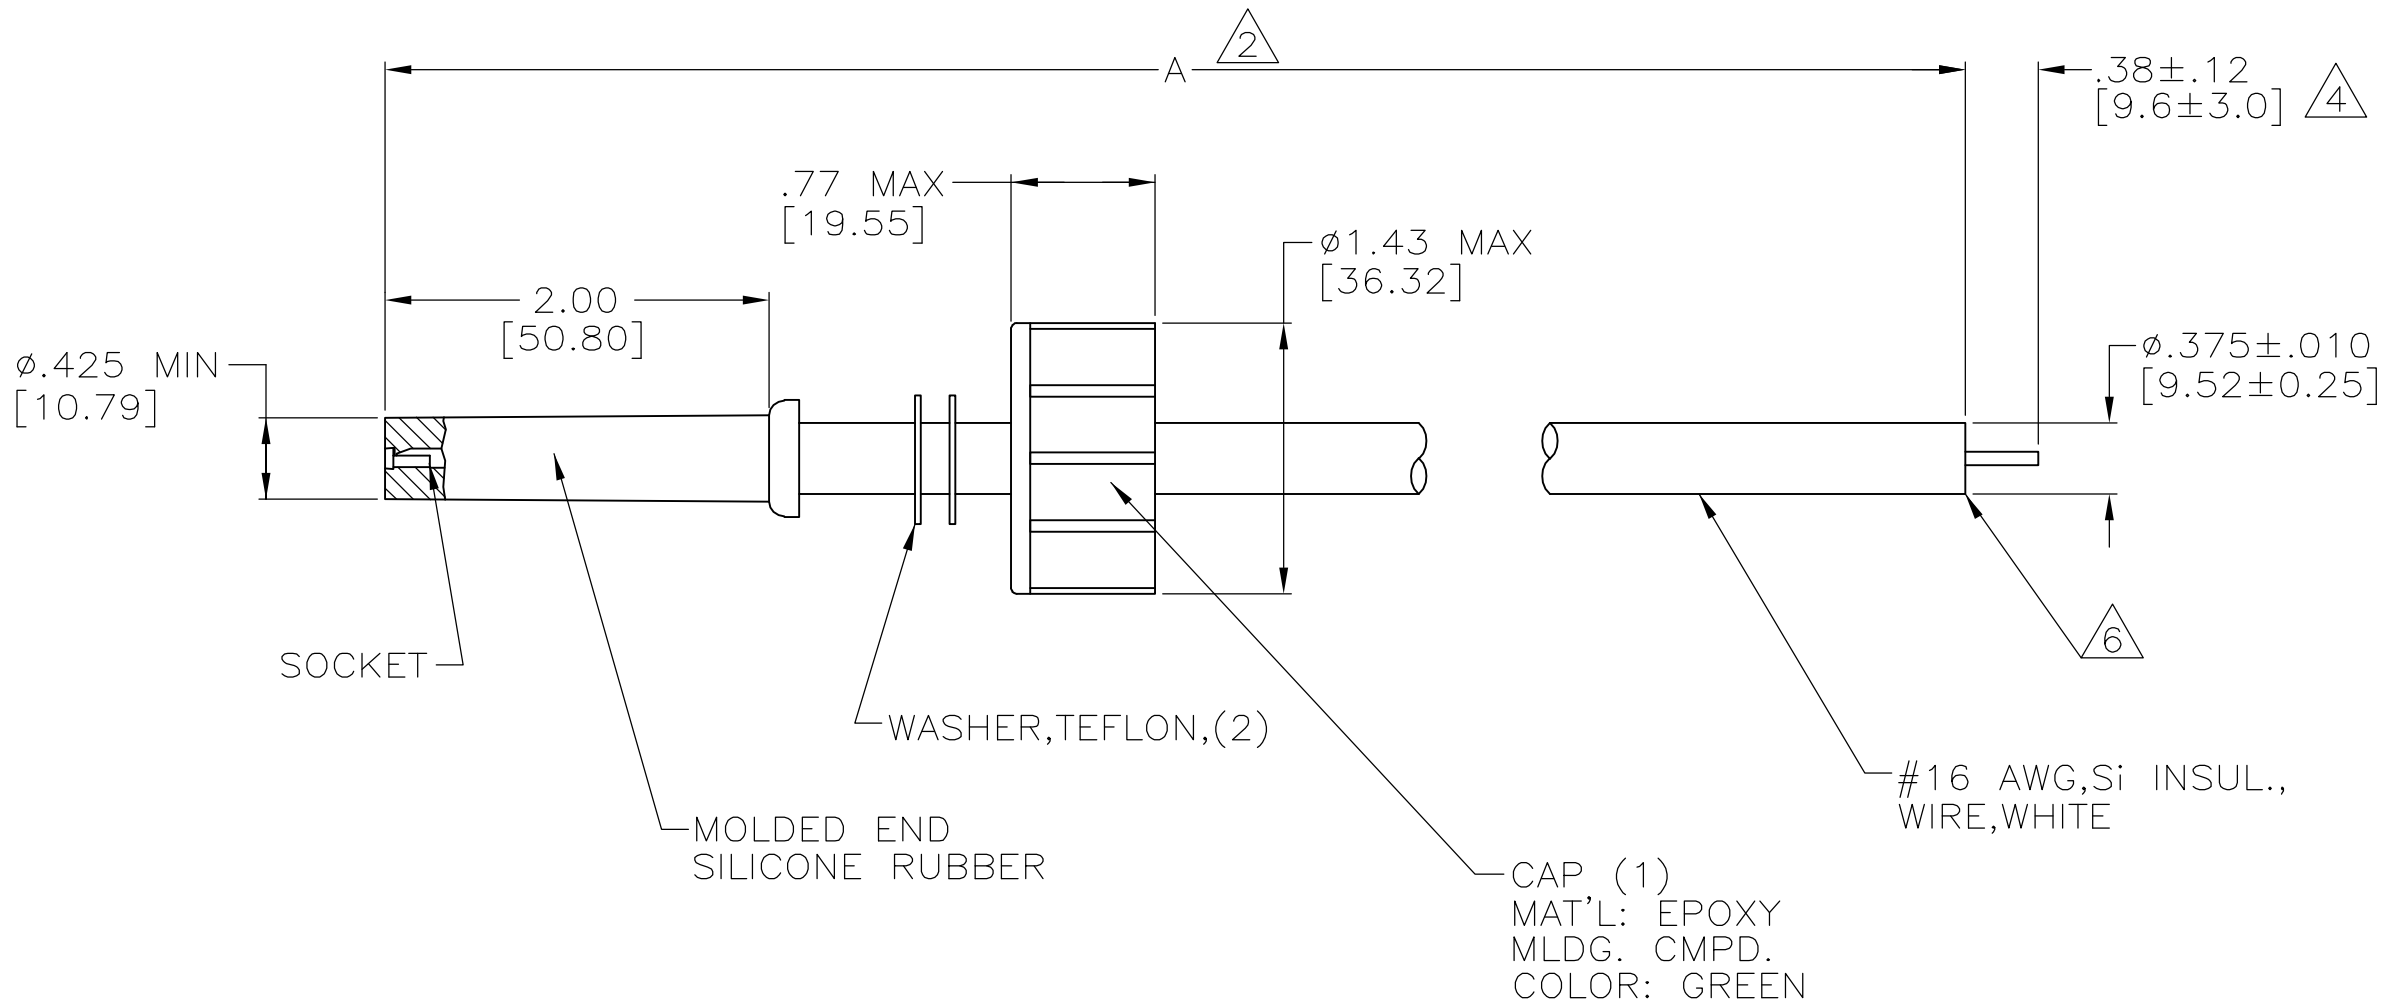

<div>6</div>	74.00 [1879.6]	5-445058-2
<div>6</div>	39.00 [990.6]	5-445058-1
<div>4</div>	74.00 [1879.6]	445058-2
<div>4</div>	39.00 [990.6]	445058-1
REMARKS	A DIM	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	18-DEC-89	<div><div>tyco</div><div>Electronics</div></div> <div>Tyco Electronics Corporation Harrisburg, Pa 17105-3608</div>		
		CHK	18-DEC-89			
<div>DIMENSIONS: INCHES [mm]</div>		D.EABY	18-DEC-89	NAME LEAD ASSY SGL END LGH-4		
		APVD	18-DEC-89			
<div></div>		D.EABY	18-DEC-89	SIZE A2		
		PRODUCT SPEC				
MATERIAL SEE CALLOUTS		APPLICATION SPEC		CAGE CODE 00779		RESTRICTED TO -
		FINISH				
		WEIGHT	-	DRAWING NO C=445058		REV C
		CUSTOMER DRAWING				
		SCALE	1:1	SHEET 1 OF 1		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-445058-2](#)